

FEATURES

- * 1.2 inch (30.42 mm) MATRIX HEIGHT
- * LOW POWER REQUIREMENT
- * SINGLE PLANE, WIDE VIEWING ANGLE
- * SOLID STATE RELIABILITY
- * 5 X 7 ARRAY WITH X-Y SELECT
- * COMPATIBLE WITH USASCII AND EBCDIC CODES
- * STACKABLE HORIZONTALLY
- * CATEGORIZED FOR LUMINOUS INTENSITY


DESCRIPTION

The LTP-1557AE-01 is a 1.2 inch (30.42 mm) matrix height 5 X 7 dot matrix display. The device uses RED ORANGE LED chips, (GaAsP epi on GaP substrate). This display has a black face and white dot color.

DEVICE


PART NO.	DESCRIPTION
RED ORANGE	Cathode Column
LTP-1557AE-01	Anode Row

PACKAGE DIMENSIONS

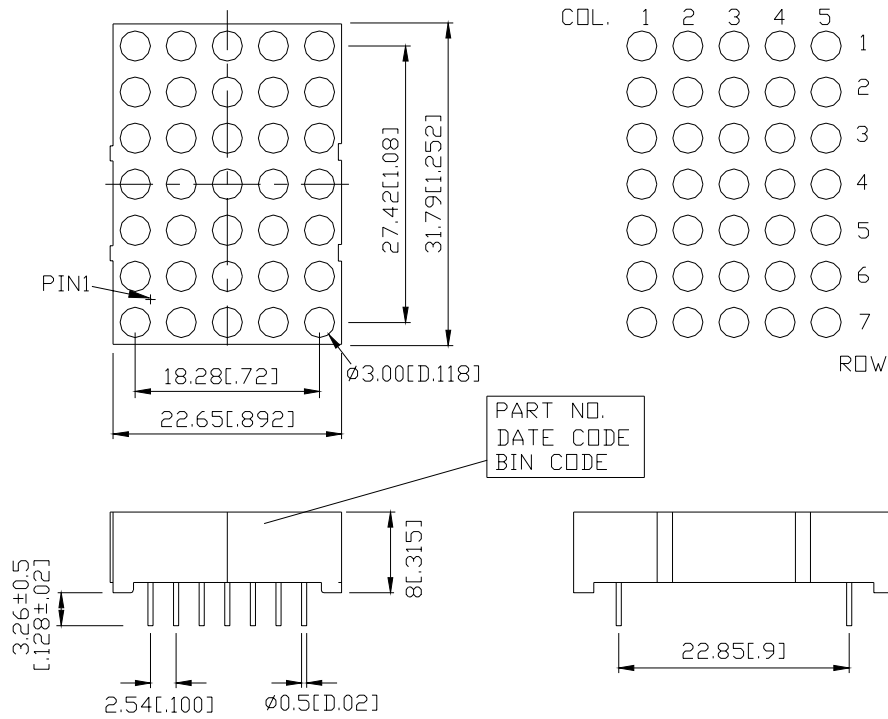

NOTES: All dimensions are in millimeters. Tolerances are ± 0.25 mm (0.01") unless otherwise noted.

INTERNAL CIRCUIT DIAGRAM

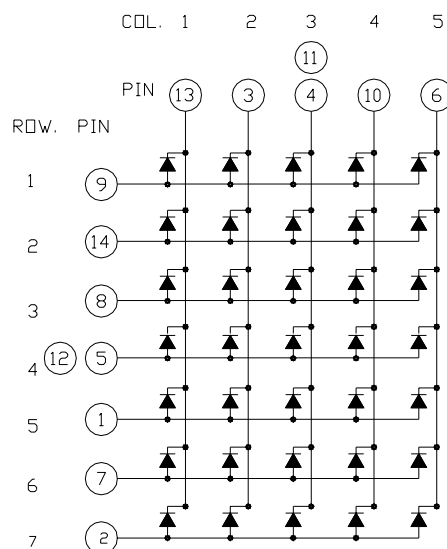

PIN CONNECTION

No.	CONNECTION
1	ANODE ROW 5
2	ANODE ROW 7
3	CATHODE COLUMN 2
4	CATHODE COLUMN 3
5	ANODE ROW 4
6	CATHODE COLUMN 5
7	ANODE ROW 6
8	ANODE ROW 3
9	ANODE ROW 1
10	CATHODE COLUMN 4
11	CATHODE COLUMN 3
12	ANODE ROW 4
13	CATHODE COLUMN 1
14	ANODE ROW 2

ABSOLUTE MAXIMUM RATING

PARAMETER	MAXIMUM RATING	UNIT
Average Power Dissipation Per Dot (Frequency 1Khz, 10% duty cycle)	36	mW
Peak Forward Current Per Dot	100*	mA
Average Forward Current Per Dot	13	mA
Derating Linear From 25 Per Dot	0.17	mA/
Reverse Voltage Per Dot	5	V
Operating Temperature Range	-35 to +85	
Storage Temperature Range	-35 to +85	
Soldering Conditions:1/16 inch below seating plane for 3 seconds at 260		

* see figure 5 to establish pulsed condition






ELECTRICAL / OPTICAL CHARACTERISTICS AT Ta = 25°C

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITION
Average Luminous Intensity	I _v	1780	4000		μcd	I _p = 80mA 1/16Duty
Peak Emission Wavelength	λ _p		630		nm	I _F = 20mA
Spectral Line Half-Width	Δλ		40		nm	I _F = 20mA
Dominant Wavelength	λ _d		621		nm	I _F = 20mA
Forward Voltage any Dot	V _F		2.0	2.6	V	I _F = 20mA
			2.6	3.4		I _F = 80mA
Reverse Current any Dot	I _R			100	μA	V _R = 5V
Luminous Intensity Matching Ratio	I _v -m			2:1		I _p = 80mA 1/16Duty

Note: Luminous intensity is measured with a light sensor and filter combination that approximates the CIE (Commision Internationale De L'Eclairage) eye-response curve.

TYPICAL ELECTRICAL / OPTICAL CHARACTERISTIC CURVES

(25°C Ambient Temperature Unless Otherwise Noted)

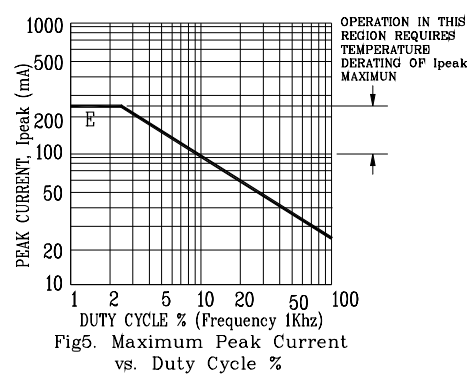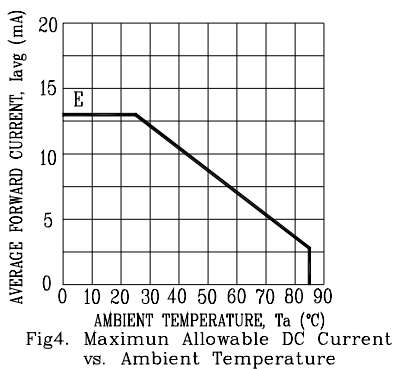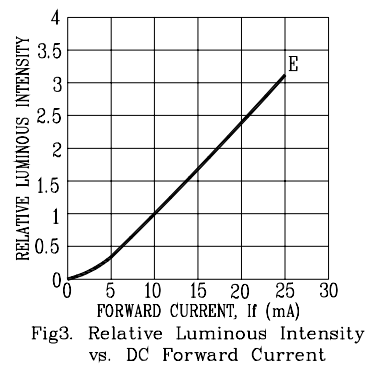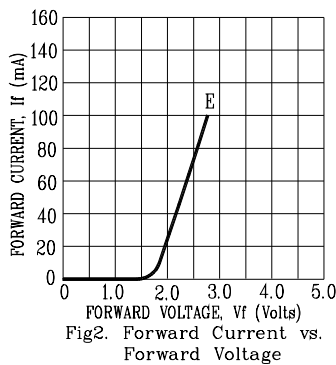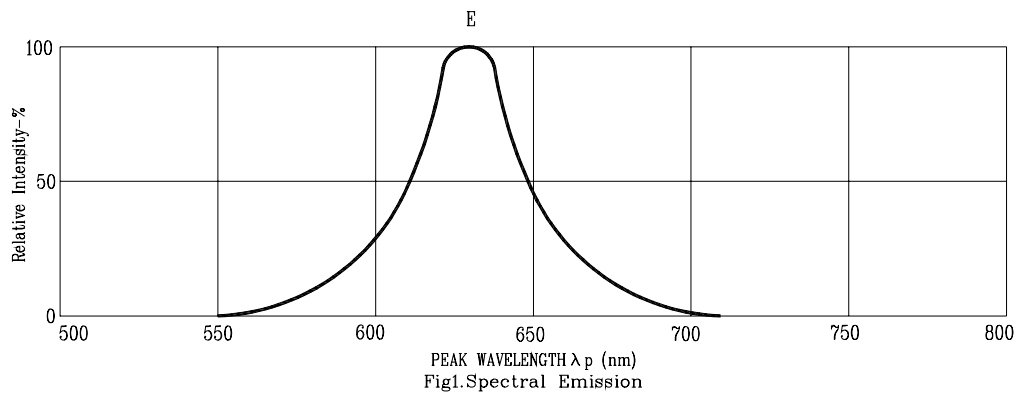

NOTE: E=RED ORANGE