
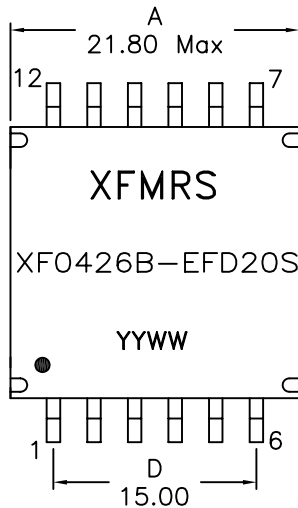
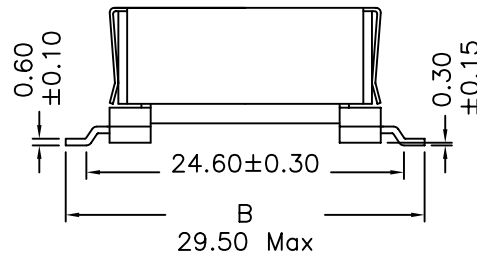



## 1. Mechanical Dimensions:

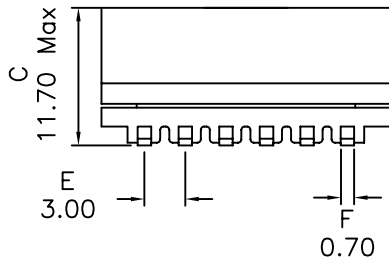

### Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. SMD Lead Coplanarity: ±0.004"(0.102mm)
9. Electrical and mechanical specifications 100% tested
10. RoHS Compliant Component

## 2. Schematic:

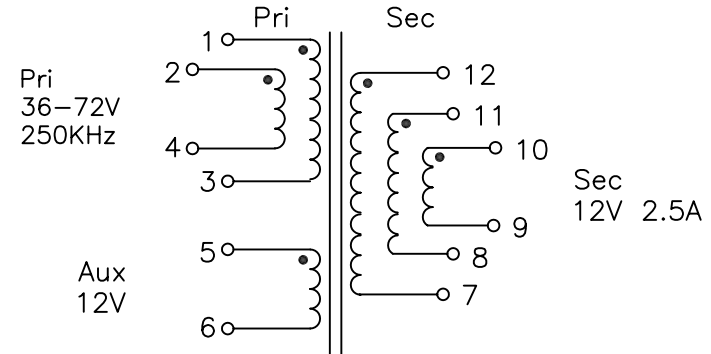

## 3. Electrical Specifications: @25°C

OCL: Pins 1,2-4,3 42uH ±10% @250KHz, 0.7V

Q: Pins 1,2-4,3 30 Min @250KHz, 0.7V

LL: Pins 1,2-4,3 0.545uH Max @250KHz, 0.7V, Short Secs

DCR: Pins 1,2-4,3 0.060 Ohms Max

Pins 5-6 0.195 Ohms Max

Pins 12-7 0.045 Ohms Max

Pins 11-8 0.045 Ohms Max

Pins 10-9 0.045 Ohms Max

Turns Ratio: (1-3):(2-4):(5-6):(12-7):(11-8):(10-9)

= 1:1:0.333:0.333:0.333:0.333 ±2%

Isolation Voltage: 1500Vrms, Pri&Aux to Sec

Peak Primary Current: 2.6A

<b>XFMRS Inc</b> www.XFMRS.com	Title: 30W POE Transformer		
	UNLESS OTHERWISE SPECIFIED	P/N: XF0426B-EFD20S	REV. A
TOLERANCES: .xx ±0.25	DWN.	Xianyi	Jun-23-09
Dimensions in MM	CHK.	YK Liao	Jun-23-09
SHEET 1 OF 1	APP.	BW	Jun-23-09

DOC. REV A/2

**PROPRIETARY**

Document is the property of XFMRS Group & is not allowed to be duplicated without authorization.