


RECOMMENDED P.C.B LAYOUT (COMPONENT SIDE)
P.C.B THICKNESS=1.20mm (TOLERANCE=±0.05)

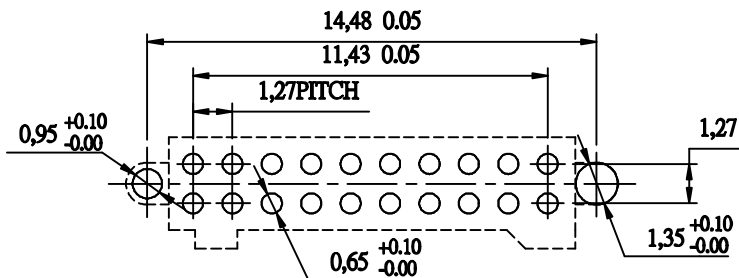

NOTE:
127150FS020GX51ZR
T
1: PLATING
G1-50" GOLD OVER NICKEL.
G2-GOLD FLASH OVER NICKEL.
G3-100" GOLD OVER NICKEL.
G4-150" GOLD OVER NICKEL.
G5-300" GOLD OVER NICKEL.
G6-500" GOLD OVER NICKEL.

3				
2	TERMINAL	COPPER ALLOY		GOLD/TIN PLATED
1	PLASTIC	HIGH THER. PLASTIC	BLACK	UL 94V-0
NO.	DESCRIPTION	MATERIAL	COLOR	REMARK

SUYIN
CONNECTOR

CUSTOMER COPY TITLE: 1.27mmX1.27 PITCH SOCKET DIP TYPE

PART NO.		127150FS020GX51ZR		
PRODUCT SPEC.		127150FS/1.2750S		
FILE NAME.	D JNG	127150FS020GX51ZR-C		
SCALE	4:1	UNIT:mm	A4	SHEET: 1 of 2

					Angle	±2'	DRAW	李振文	08/04/15
					30 -	±0.50	DESIGN	李振文	08/04/15
	0		NEW RELEASE	李振文 鄭家奇	10 - 30	±0.30	CHECK	杜朝紅	08/04/15
	PO	07/11/08	NEW	朱歡 鄭家奇	- 10	±0.15	APPRO.	鄭家奇	08/04/15
ECN(DCN) NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED	APPRO.	鄭家奇	08/04/15

Original Draw: 朱歡 Design: 朱歡 Check: 杜朝紅 Appr: 鄭家奇 發行日期: 07/11/08

071108-BB170