


**PART NUMBERING GUIDE**

**Environmental/Mechanical Specifications on page F5**

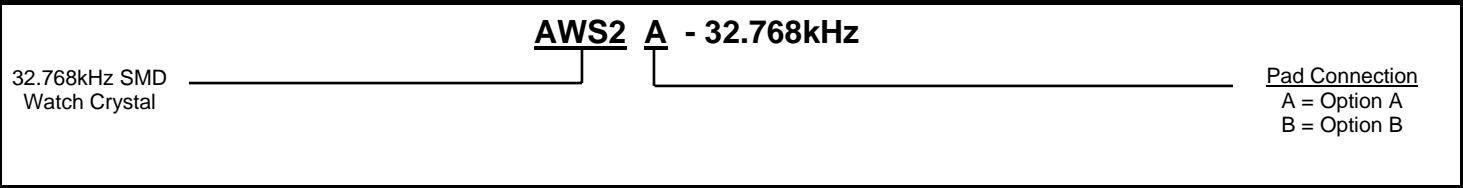

**ELECTRICAL SPECIFICATIONS**

Revision: 1998-B

Frequency	32.768kHz
Frequency Tolerance	±20ppm Max.
Parabolic Curvature Constant	-0.04ppm/(Δ°C) <sup>2</sup> Max.
Turnover Temperature	25°C ±5°C
Operating Temperature Range	-20°C to 70°C
Storage Temperature Range	-55°C to 125°C
Load Capacitance	12.5pF Typical (contact factory for custom load capacitance)
Resistance	60,000 Ohms Max
Q Factor	50,000 Min.
Drive Level	1uWatt Maximum
Motional Capacitance	2.0fF Typ.

**MECHANICAL DIMENSIONS**

**PIN CONNECTION OPTIONS**  
Marking Guide on page 58-59

