


Schottky Rectifier - 0.2Amp 30Volt

Features


- For surface mounted applications
- Low profile package
- Built-in strain relief
- Metal silicon junction, majority carrier conduction
- Low power loss, high efficiency
- High current capability, low forward voltage drop
- For use in low voltage high frequency inverters, free wheeling and polarity protection application
- High temperature soldering guaranteed
- High reliability
- High surge current capability
- Epitaxial construction
- Lead free device
- ESD sensitive product handling required

SOD-523

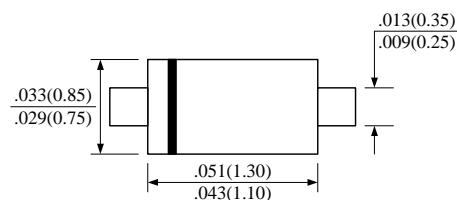

Mechanical data

- Case : Molded plastic
- Epoxy : UL 94V-0 rate flame retardant
- Terminals : Solder plated, solderable per MIL-STD-750, method 2026
- Polarity : Color band denotes cathode end

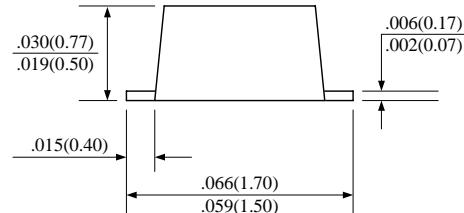

Maximum ratings and Electrical characteristics

TYPE	SYMBOL	CH520S-30PT	UNIT
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	30	V
Maximum RMS Voltage	V _{RMS}	21	V
Maximum DC Blocking Voltage	V _{DC}	30	V
Maximum Average Forward Rectified Current	I _o	0.2	A
Peak Forward surge Current, 8.3ms single half sine-wave	I _{FSM}	1.0	A
Maximum Instantaneous Forward Voltage at I _F = 200mA	V _F	0.6	V
Maximum Average Reverse Current at V _R = 10V	I _R	1.0	µA
Typical Junction Capacitance between Terminal (Note 1)	C _J	6.0	pF
Operating Temperature Range	T _J	125	°C
Storage Temperature Range	T _{STG}	-40 - 125	°C

Note: Measured at 1.0 MHz and applied reverse voltage of 10.0 volts

August 2007 / Rev.5

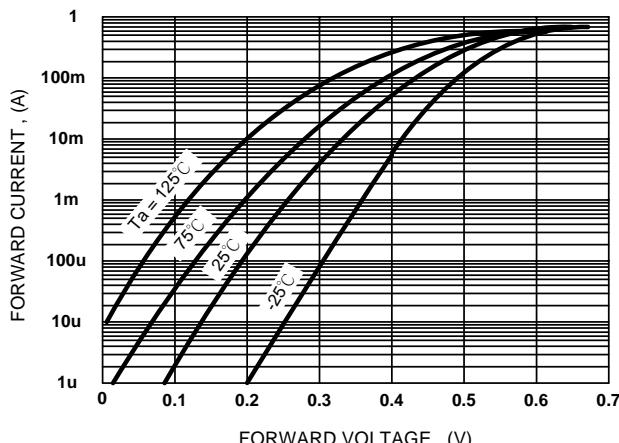


Figure 1. Forward Characteristics

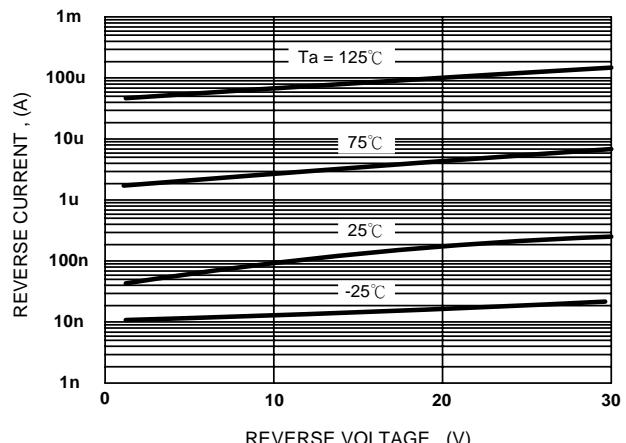


Figure 2. Reverse Characteristics

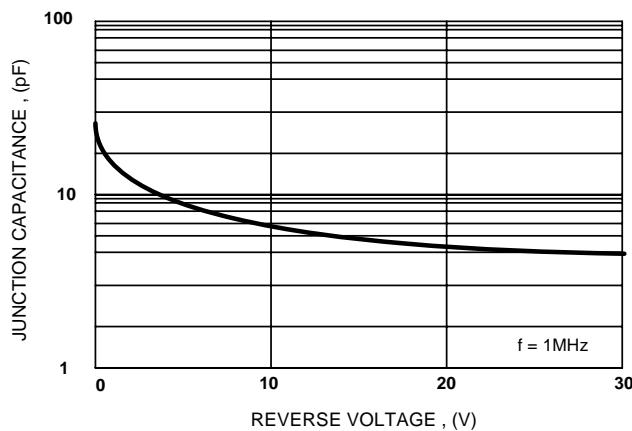


Figure 3. Typical Junction Capacitance

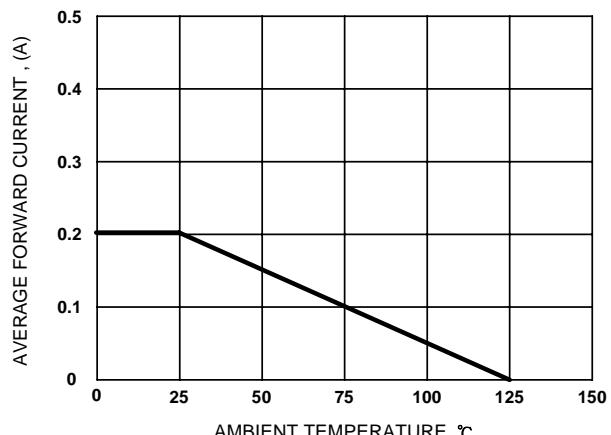


Figure 4. Forward Current Derating Curve