



### 1. CONFIGURATION & DIMENSIONS :

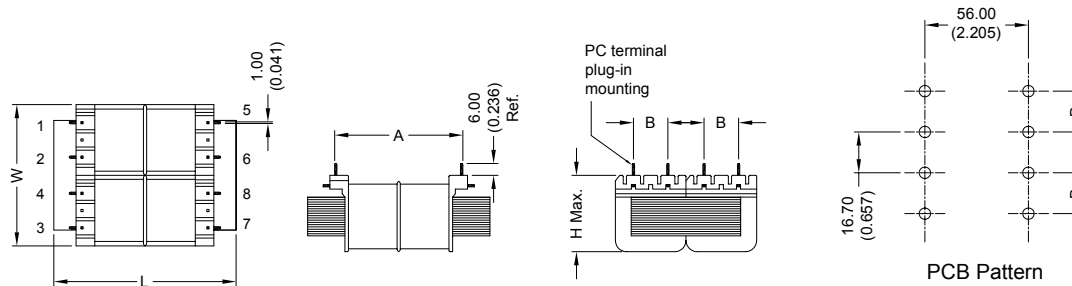

UNIT : mm (inch)

SIZE	L	W	H	A	B	gram
48	80.40 (3.168)	62.70 (2.475)	34.50 (1.358)	57.00 (2.244)	15.00 (0.590)	595.34

### 2. SCHEMATIC :



### 3. ELECTRICAL CHARACTERISTICS (@ 25°C) :

- |                                      |                              |
|--------------------------------------|------------------------------|
| a. Primary Voltage                   | AC 115/230 V 50/60 Hz .      |
| b. NO Load Primary Current           | Less Than 70mA .             |
| Input AC 115V 60Hz .                 | Less Than 70mA .             |
| Input AC 230V 50Hz .                 | Series AC 136.00V .          |
| c. Secondary Voltage (±5%)           | Parallel AC 68.00V .         |
| d. Secondary Load Current            | Series 400mA .               |
|                                      | Parallel 800mA .             |
| e. Full Load Primary Current         | Less Than - mA .             |
| Input AC 115V 60Hz .                 | Less Than - mA .             |
| Input AC 230V 50Hz .                 | Series 60.00V .              |
| f. Full Load Secondary Voltage (±5%) | Parallel 120.00V .           |
| g. DC Resistance                     |                              |
| Pin 1-2                              | Primary = 24.5 Ohm .         |
| Pin 3-4                              | = 24.5 Ohm .                 |
| Pin 5-6                              | Secondary = 8.3 Ohm .        |
| Pin 7-8                              | = 8.3 Ohm .                  |
| h. Insulation Resistance             | DC 500V 100Meg Ohm Of More . |
| i. Withstand Voltage (Hi-Pot)        | AC 1500V 60Hz 1 Minutes .    |
| j. Temperature Rise                  | Less Than 60 Deg C .         |
| k. Core Size                         | UI-48 x 16.20 m/m .          |



**RoHS Compliant**

NOTE : Specifications subject to change without notice. Please check our website for latest information.

10.06.2008



**SUPERWORLD ELECTRONICS (S) PTE LTD**