


# VWX1100 Pressure Window

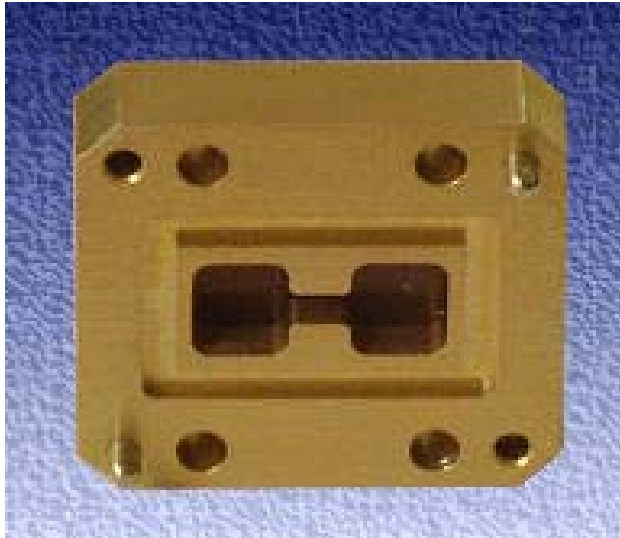


## Description:

Broadband teflon fiberglass window for use in double ridge waveguide.

## Features:

- Waveguide: WRD-650
- Frequency Range: 6.5 - 18.0 GHz
- VSWR: 1.10:1 max
- Insertion loss: 0.1 dB max.
- Power: 300 Watts CW
- Pressure: 35 PSIA max.
- Material/Finish: Aluminum Iridite

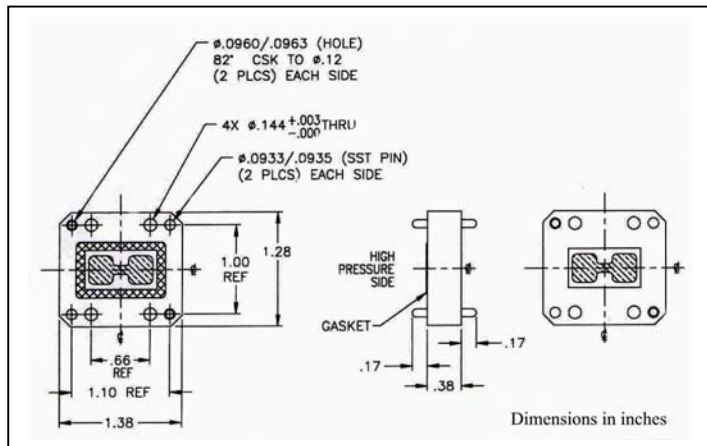

150 Sohler Road  
Beverly, Massachusetts 01915



Phone: 978-922-6000 Fax: 978-922-2736  
E-Mail: [marketing@bmd.cpii.com](mailto:marketing@bmd.cpii.com)  
Internet: [www.cpii.com/bmd](http://www.cpii.com/bmd)