



REV.	CHANGE CONTENT	BY	DATE

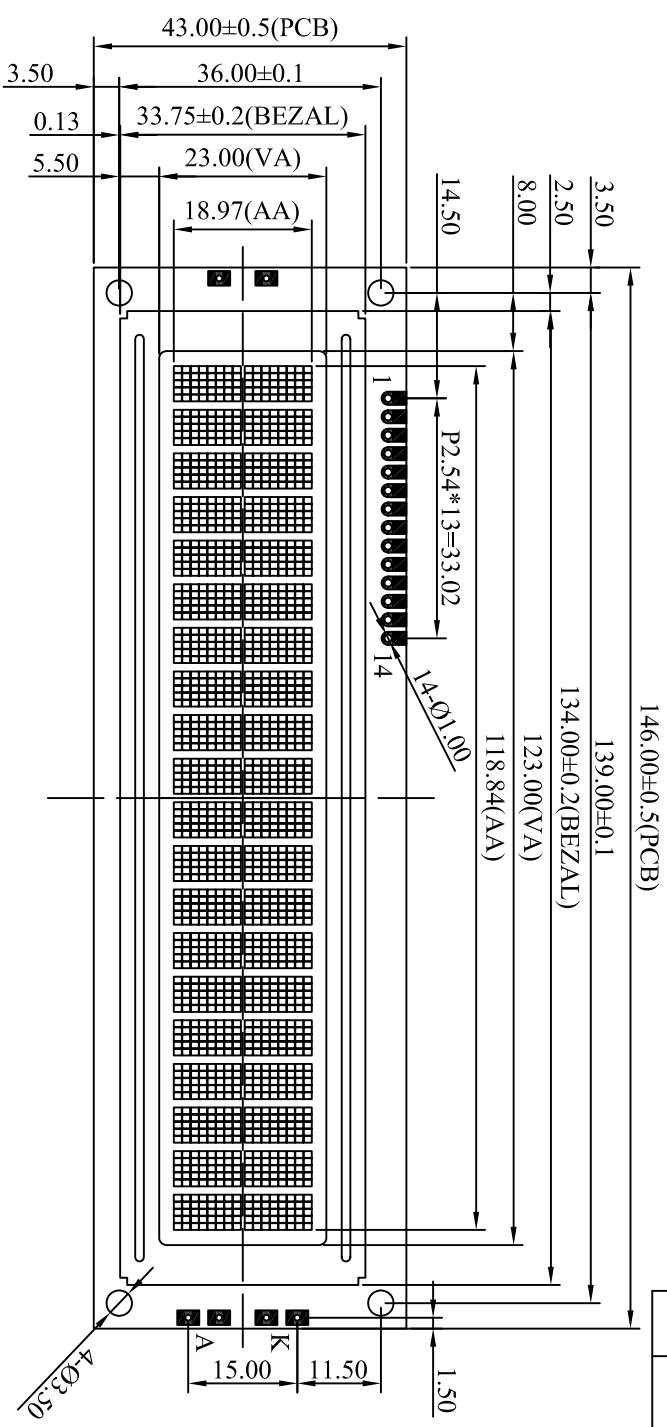

PIN NO.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	A	K
DESCRIPTION	VSS	VDD	V0	RS	RW	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	LED+	LED-

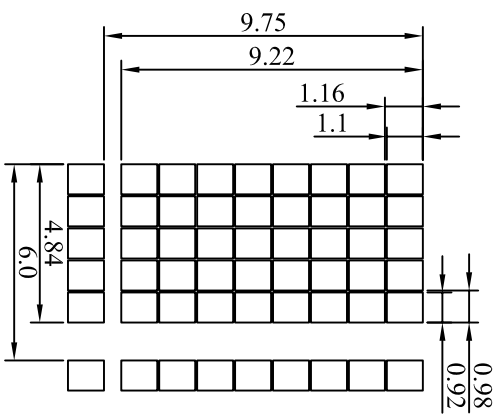

**NOTE:**

1. STN, POSITIVE, YELLOW-GREEN
2. DUTY: 1/16, BIAS: 1/5
3. VIEW DIRECTION: 6 O'CLOCK
4. OPERATING TEMP: -20°C ~ +70°C
5. STORAGE TEMP: -30°C ~ +80°C
6. CONTROLLER: S6A0069 OR EQUIVALENT.
7. BACKLIGHT: LED, Y/G, BOTTOM-LIGHT
8. CGROM CODE: European Font

Vf = 4.2V, If = 270mA, 60DIES, LED+ Connect to VDD and LED- connect to VSS.

TOLERANCE		HTDISPLAY		HTDISPLAY CO., LTD.		DRAWING No.: HC200203C-YF62L-VA	
>0-6	±0.10	DESIGN	JHG	20060721	STANDARD	REV.: A	SCALE: -
>6-80	±0.20	CHECKED			TECHNOLOGY	PROJECTION:	UNIT: MM
>80-240	±0.30	APPROVED			Q.A		SHEET: 1/1
>240-400	±0.50						
// L	±0.10						