



PRODUCT SUMMARY

	$V_{(BR)DSS}$	$R_{DS(ON)}$	I_D
N-Channel	60	55m	4.5A
P-Channel	-55	80m	-3.5A



G : GATE
D : DRAIN
S : SOURCE

ABSOLUTE MAXIMUM RATINGS ($T_C = 25\text{ }^\circ\text{C}$ Unless Otherwise Noted)

PARAMETERS/TEST CONDITIONS		SYMBOL	N-Channel	P-Channel	UNITS
Drain-Source Voltage		V_{DS}	60	-55	V
Gate-Source Voltage		V_{GS}	± 20	± 20	V
Continuous Drain Current	$T_C = 25\text{ }^\circ\text{C}$	I_D	4.5	-3.5	A
	$T_C = 70\text{ }^\circ\text{C}$		4	-3	
Pulsed Drain Current ¹		I_{DM}	20	-20	
Power Dissipation	$T_C = 25\text{ }^\circ\text{C}$	P_D	2		W
	$T_C = 70\text{ }^\circ\text{C}$		1.3		
Junction & Storage Temperature Range		T_j, T_{stg}	-55 to 150		$^\circ\text{C}$
Lead Temperature (¹ / ₁₆ " from case for 10 sec.)		T_L	275		

THERMAL RESISTANCE RATINGS

THERMAL RESISTANCE	SYMBOL	TYPICAL	MAXIMUM	UNITS
Junction-to-Ambient	$R_{\theta JA}$		62.5	$^\circ\text{C} / \text{W}$

¹Pulse width limited by maximum junction temperature.

²Duty cycle $\leq 1\%$

ELECTRICAL CHARACTERISTICS ($T_C = 25\text{ }^\circ\text{C}$, Unless Otherwise Noted)

PARAMETER	SYMBOL	TEST CONDITIONS	LIMITS			UNIT	
			MIN	TYP	MAX		
STATIC							
Drain-Source Breakdown Voltage	$V_{(BR)DSS}$	$V_{GS} = 0\text{V}, I_D = 250\mu\text{A}$	N-Ch	60		V	
		$V_{GS} = 0\text{V}, I_D = -250\mu\text{A}$	P-Ch	-55			
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = 250\mu\text{A}$	N-Ch	1.0	1.5	2.5	V
		$V_{DS} = V_{GS}, I_D = -250\mu\text{A}$	P-Ch	-1.0	-1.5	-2.5	
Gate-Body Leakage	I_{GSS}	$V_{DS} = 0\text{V}, V_{GS} = \pm 20\text{V}$	N-Ch			± 100	nA
		$V_{DS} = 0\text{V}, V_{GS} = \pm 20\text{V}$	P-Ch			± 100	

Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS} = 48V, V_{GS} = 0V$	N-Ch			1	μA
		$V_{DS} = -44V, V_{GS} = 0V$	P-Ch			-1	
		$V_{DS} = 40V, V_{GS} = 0V, T_J = 55^\circ C$	N-Ch			10	
		$V_{DS} = -36V, V_{GS} = 0V, T_J = 55^\circ C$	P-Ch			-10	
On-State Drain Current ¹	$I_{D(ON)}$	$V_{DS} = 5V, V_{GS} = 10V$	N-Ch	20			A
		$V_{DS} = -5V, V_{GS} = -10V$	P-Ch	-20			
Drain-Source Resistance ¹	On-State $R_{DS(ON)}$	$V_{GS} = 4.5V, I_D = 4A$	N-Ch		55	75	m
		$V_{GS} = -4.5V, I_D = -3A$	P-Ch		90	150	
		$V_{GS} = 10V, I_D = 4.5A$	N-Ch		42	55	
		$V_{GS} = -10V, I_D = -3.5A$	P-Ch		60	80	
Forward Transconductance ¹	g_{fs}	$V_{DS} = 10V, I_D = 4.5A$	N-Ch		14		S
		$V_{DS} = -5V, I_D = -3.5A$	P-Ch		9		

DYNAMIC

Input Capacitance	C_{iss}		N-Ch		650		pF
		N-Channel	P-Ch		760		
Output Capacitance	C_{oss}	$V_{GS} = 0V, V_{DS} = 25V, f = 1MHz$	N-Ch		80		pF
			P-Channel	P-Ch		90	
Reverse Transfer Capacitance	C_{rss}	$V_{GS} = 0V, V_{DS} = -30V, f = 1MHz$	N-Ch		35		pF
			P-Channel	P-Ch		40	
Total Gate Charge ²	Q_g	N-Channel $V_{DS} = 0.5V_{(BR)DSS}, V_{GS} = 10V,$ $I_D = 4.5A$	N-Ch		12.5	18	nC
			P-Channel	P-Ch		15	
Gate-Source Charge ²	Q_{gs}	P-Channel $V_{DS} = 0.5V_{(BR)DSS}, V_{GS} = -10V,$ $I_D = -3.5A$	N-Ch		2.4		nC
			P-Channel	P-Ch		2.5	
Gate-Drain Charge ²	Q_{gd}		N-Ch		2.6		nC
			P-Channel	P-Ch		3.0	

Turn-On Delay Time ²	$t_{d(on)}$	N-Channel	N-Ch		11	20	nS
			P-Ch		7	14	
Rise Time ²	t_r	$V_{DD} = 30V$	N-Ch		8	18	
		$I_D \cong 1A, V_{GS} = 10V, R_{GEN} = 6$	P-Ch		10	20	
Turn-Off Delay Time ²	$t_{d(off)}$	P-Channel	N-Ch		19	35	
			P-Ch		19	34	
Fall Time ²	t_f	$V_{DD} = -30V$	N-Ch		6	15	
		$I_D \cong -1A, V_{GS} = -10V, R_{GEN} = 6$	P-Ch		12	22	

SOURCE-DRAIN DIODE RATINGS AND CHARACTERISTICS (T_C = 25 °C)

Continuous Current	I_S		N-Ch			1.3	A
			P-Ch			-1.3	
Pulsed Current ³	I_{SM}		N-Ch			2.6	
			P-Ch			-2.6	
Forward Voltage ¹	V_{SD}	$I_F = I_S A, V_{GS} = 0V$	N-Ch			1	V
		$I_F = I_S A, V_{GS} = 0V$	P-Ch			-1	

¹Pulse test : Pulse Width ≤ 300 μsec, Duty Cycle ≤ 2%.

²Independent of operating temperature.


³Pulse width limited by maximum junction temperature.

REMARK: THE PRODUCT MARKED WITH "P5506NVG", DATE CODE or LOT #


Orders for parts with Lead-Free plating can be placed using the PXXXXXXG parts name.

N-CHANNEL


On-Region Characteristics

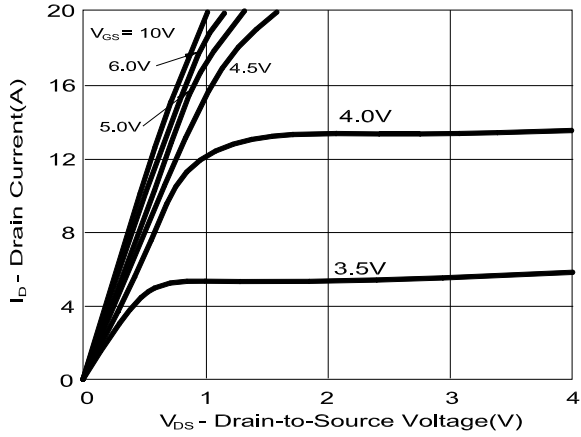


On-Resistance Variation with Drain Current and Gate Voltage

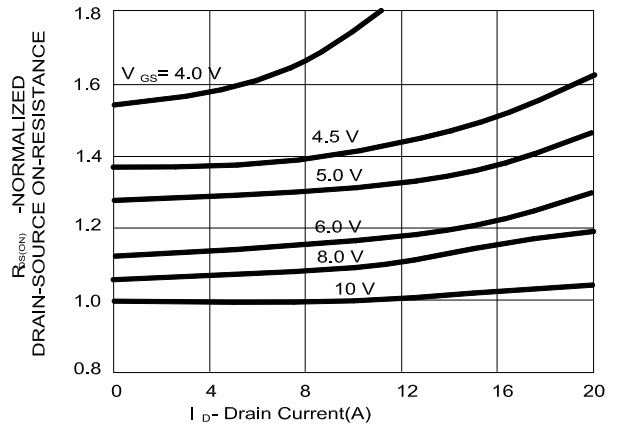


On-Resistance Variation with Temperature

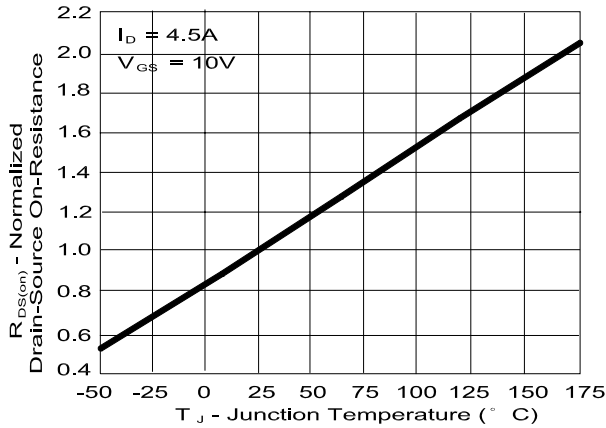


On-Resistance Variation with Gate-to-Source Voltage




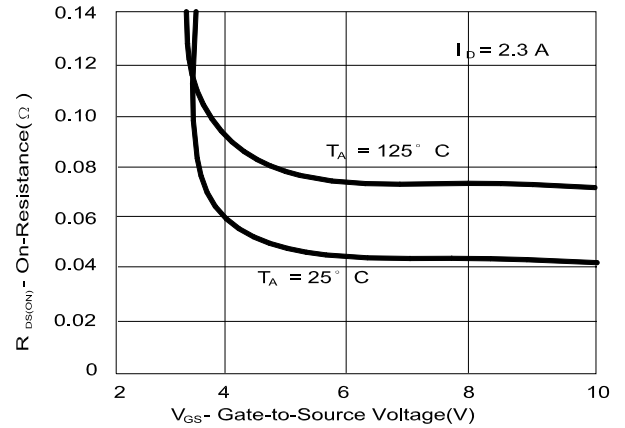


Transfer Characteristics

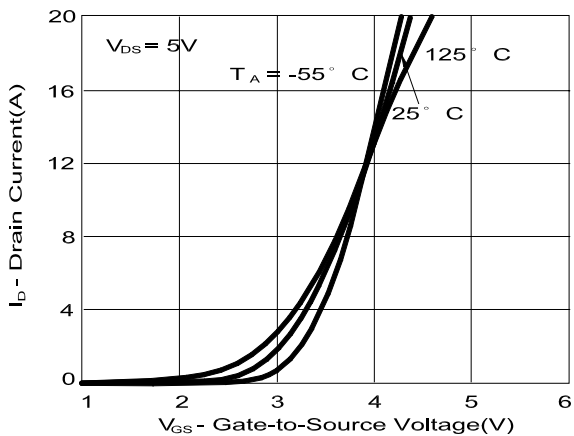


Body Diode Forward Voltage Variation with Source Current and Temperature

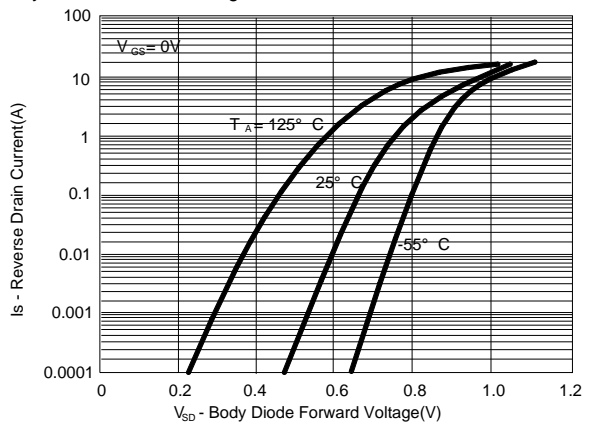

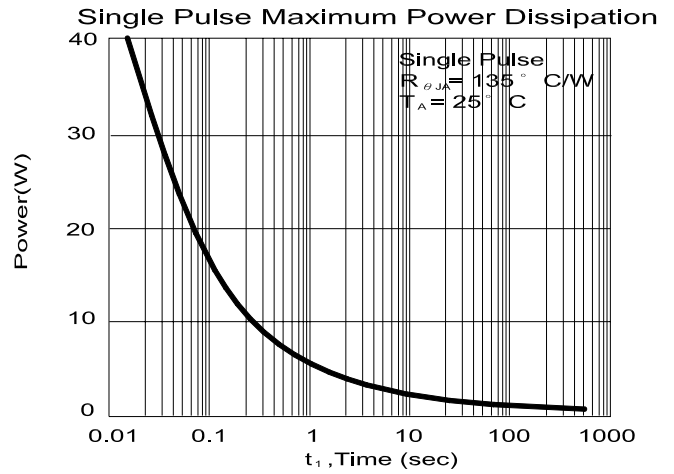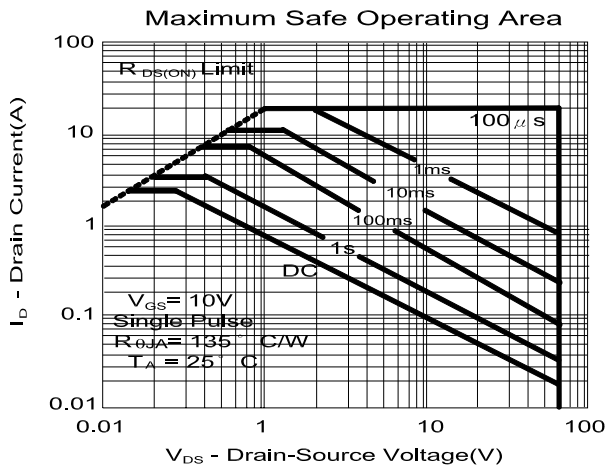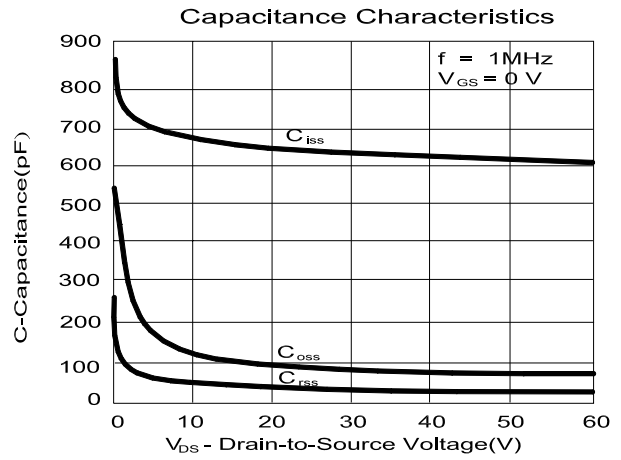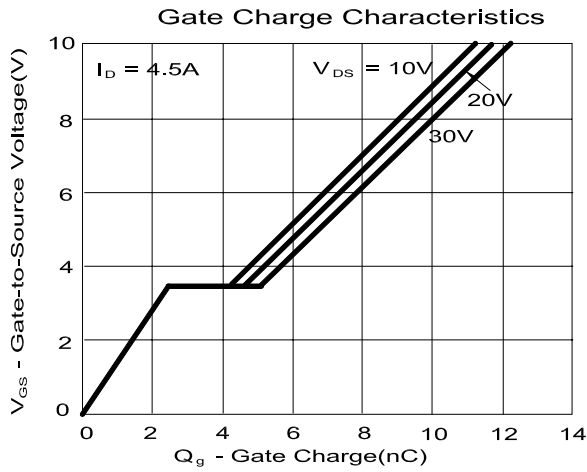


P-CHANNEL


On-Region Characteristics

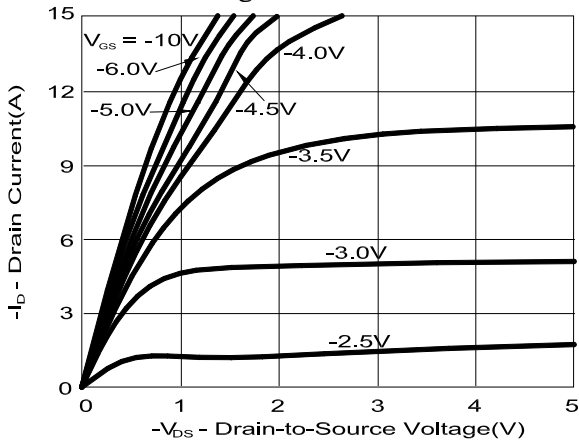


On-Resistance Variation with Drain Current and Gate Voltage

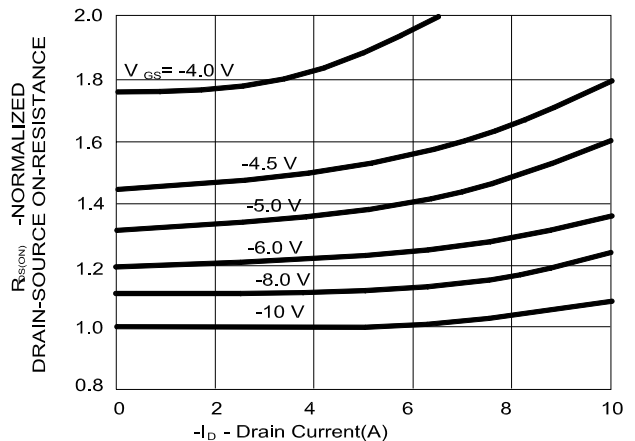


On-Resistance Variation with Temperature

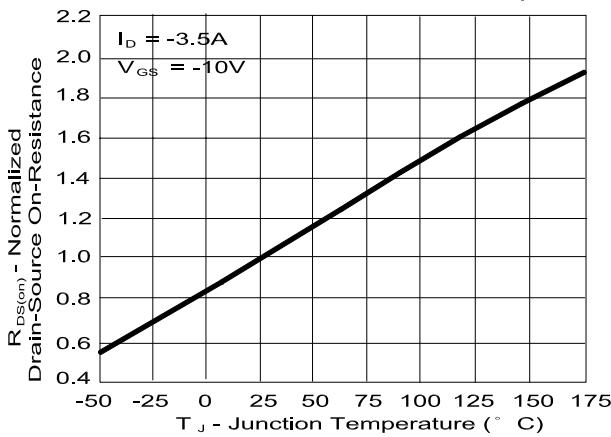


On-Resistance Variation with Gate-to-Source Voltage





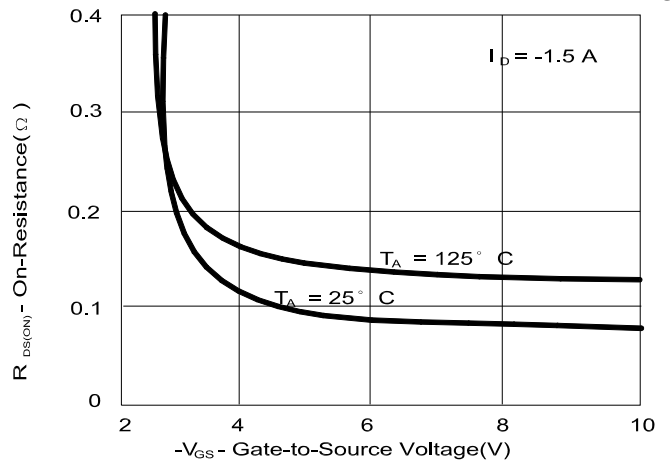


Transfer Characteristics

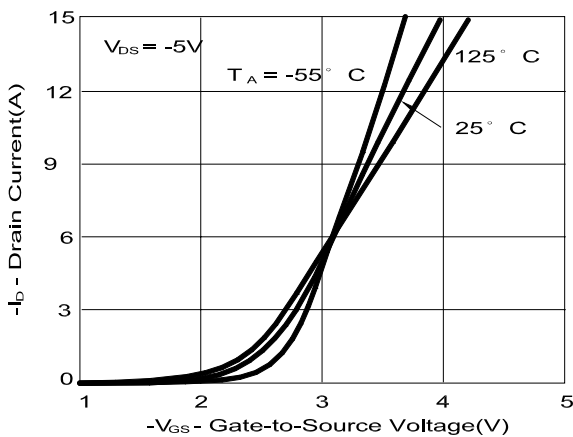

Body Diode Forward Voltage Variation with Source Current and Temperature

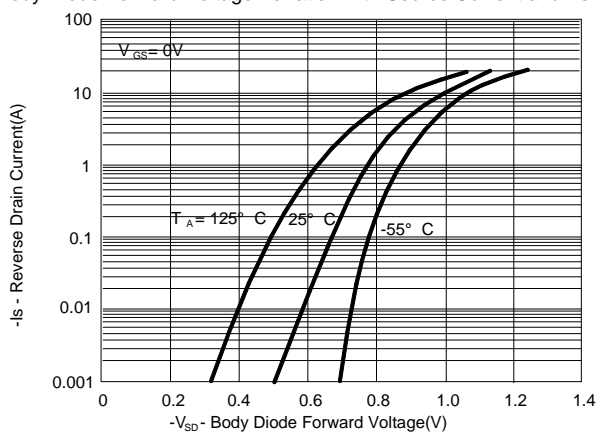

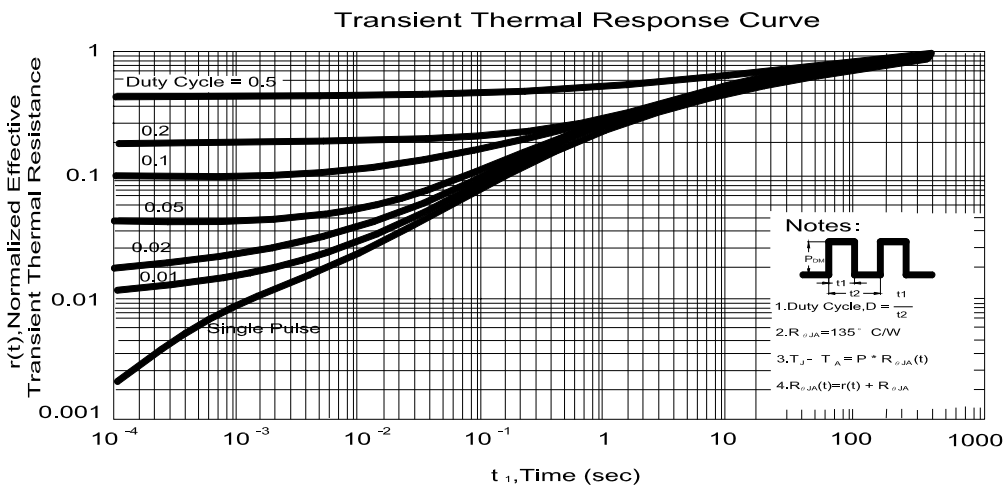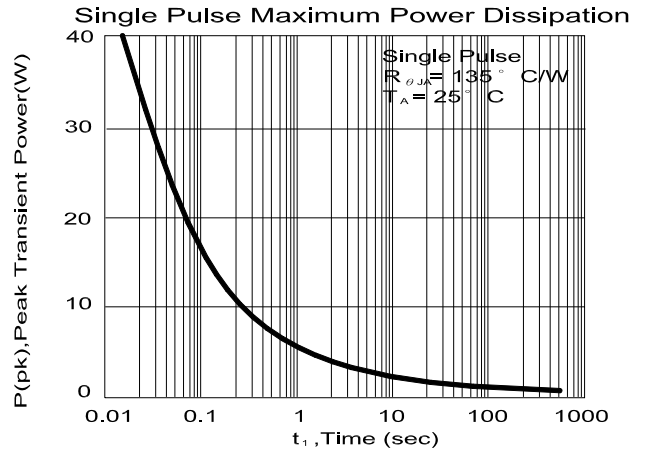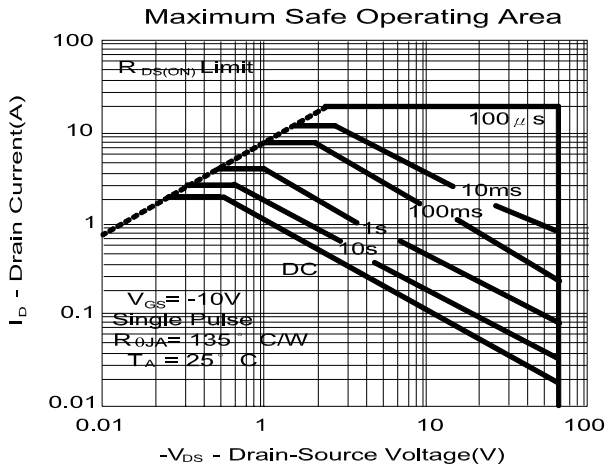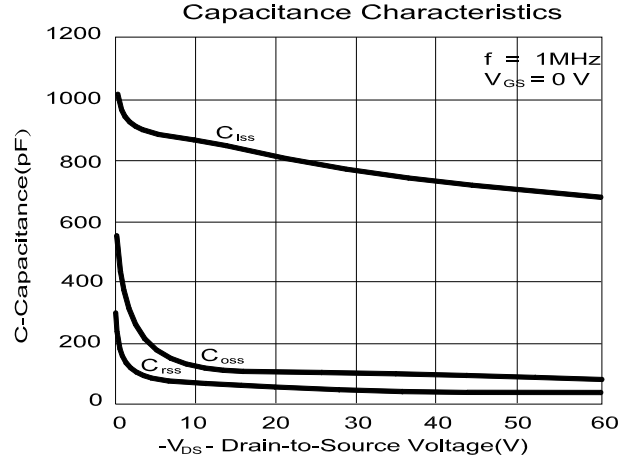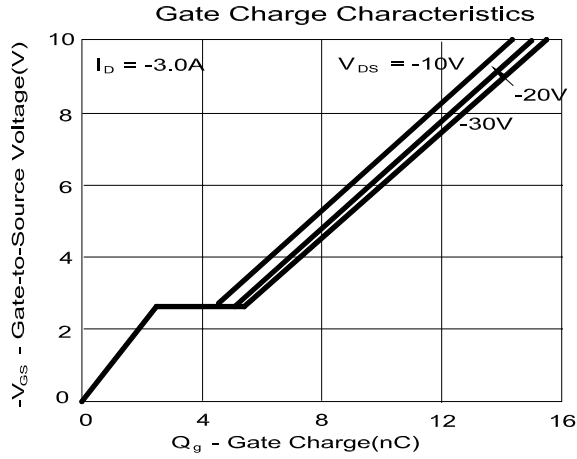

SOIC-8(D) MECHANICAL DATA

Dimension	mm			Dimension	mm		
	Min.	Typ.	Max.		Min.	Typ.	Max.
A	4.8	4.9	5.0	H	0.5	0.715	0.83
B	3.8	3.9	4.0	I	0.18	0.254	0.25
C	5.8	6.0	6.2	J		0.22	
D	0.38	0.445	0.51	K	0°	4°	8°
E		1.27		L			
F	1.35	1.55	1.75	M			
G	0.1	0.175	0.25	N			

