

CL-Z482S シリーズ

Mono-Color Side-Lighting Type CL-Z482S Series

NEW

- 小型・薄型の白色LEDです。
- ツェナーダイオードを搭載し、静電耐圧に優れています。
- Compact and thin white LED
- Zener diode LED, excellent in resistance to electrostatic potential.

● 絶対最大定格/Absolute Maximum Rating^{※1} (Ta 25°C)

Product code	Pd (mW)	I _F (mA)	I _{FP} ^{※2} (mA)	V _R (V)	Top (°C)	Tst (°C)
CL-Z482S-WS	76	20	50	5	-25~+80	-30~+85

※1 1素子当たりの値です。/The values are based on 1-die performance.

※2 I_{FP}の条件はduty 1/10、パルス巾30msecです。/Condition for I_{FP} is pulse of 1/10 duty and 30msec width.

● 電気的光学的特性/Electro-optical Characteristics (Ta 25°C)

Parameter	Symbol	Conditions	MIN	TYP	MAX	Unit
順電圧/Forward Voltage ^{※1}	V _F	I _F =5mA	—	2.9	3.15	V
逆電流/Reverse Current ^{※1}	I _R	V _R =5V	—	—	2	μA
光度/Luminous Intensity ^{※2}	I _v	I _F =5mA	—	115	—	mcd
色度座標/Chromaticity coordinates ^{※3}	x, y	I _F =5mA	x(±0.02) y(±0.02)	a 0.28 b 0.28 c 0.34 d 0.34	0.236 0.301 0.386 0.321	


※1 1素子当たりの値です。/The values are based on 1-die performance.

※2 NIST規格に準拠、各素子同時点灯の値です。


Compliant with NIST. The values are based on the condition that each die lights simultaneously.

※3 色度座標は、a、b、c、dに囲まれた範囲です。/Chromaticity coordinates is surrounded with a,b,c,d

● 外形寸法図/Outline drawing

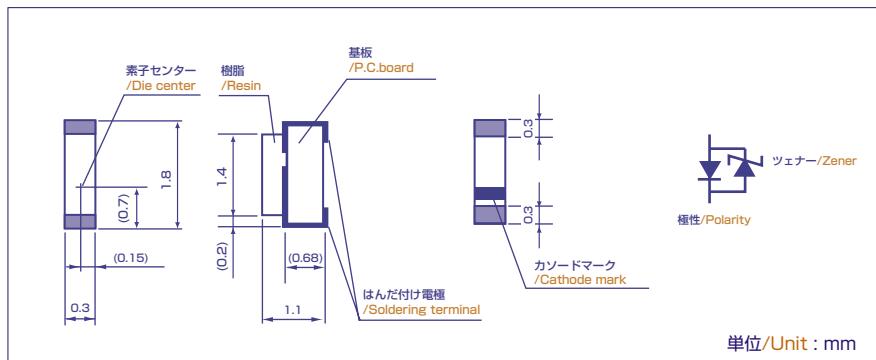

推奨はんだ付けパターン
The following soldering patterns are recommended for reflow-soldering:



■ 諸特性/Characteristics

