




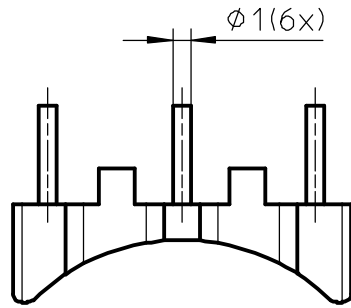


**FERROXCUBE**

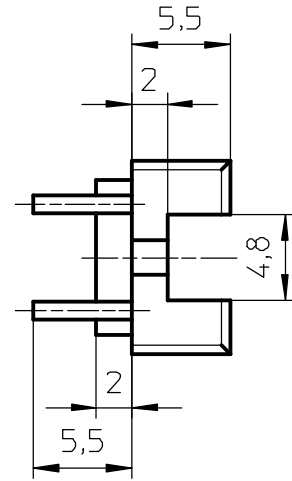

1 2 3 4

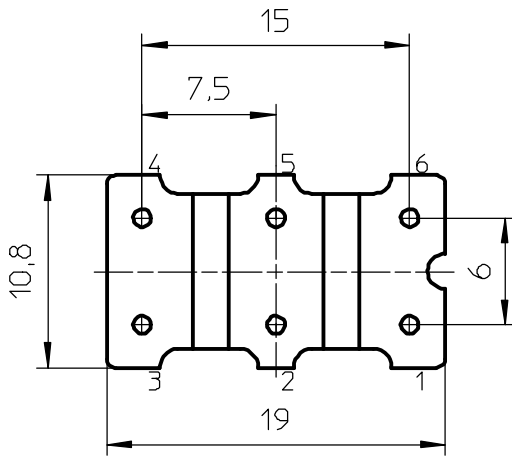

Coil former material: Longlite PM T357 (PF), glass-reinforced.  
 UL file number: E59481 - UL94V-0.  
 Pin material: CuSn - Ni flash, Sn plated.  
 Max. operating temp.: acc. to IEC 60 085 class H, 180°C.  
 Resist. to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C-3,5s.  
 Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C-2s.

CLASS NO.			1	2004-04-05
		TGP-24-6P-Z	4322 021 06381	
NAME NAAM	M.Veekens	SUPERS. VERV.	1	SH SH BL BL 112 - 001 010
MPA	CHECK CONTR.	DAT.	2004-04-05	Property of Eigendom van © FERROXCUBE 2000

**A4**