

CPDU Series (RoHS Device)



Features

(16kV) IEC 61000-4-2 rating.

Surface mount package.

High component density.

Mechanical data


Case: 0603 (1608) Standard package ,
molded plastic.

Terminals: Gold plated, solderable per
MIL-STD-750, method 2026.

Marking Code: PGD

Mounting position: Any.

Weight: 0.003 gram (approx.).

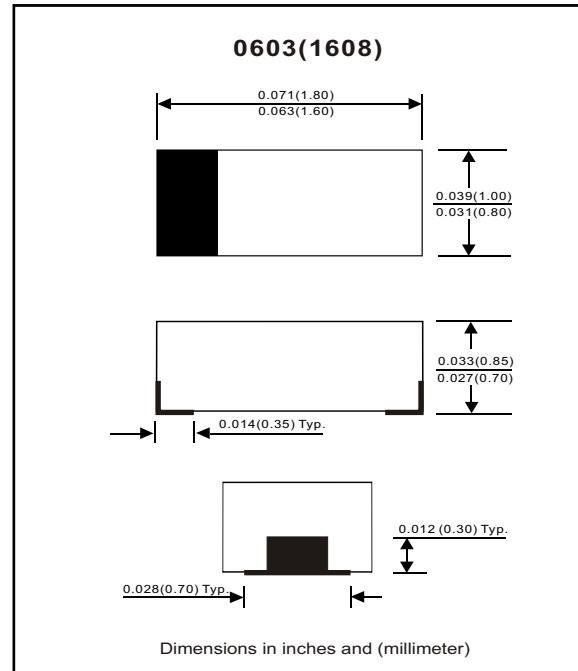

Electrical Characteristics (at TA=25°C unless otherwise noted)

Parameter	Conditions	Symbol	Min	Typ	Max	Unit
Diode breakdown voltage	CPDU5V0 CPDU12V CPDU24V CPDU36V I _F = 1mA	V _{BD}	5.1 14 25 38	7.0 17 28 40		V
Leakage current	CPDU5V0 CPDU12V CPDU24V CPDU36V 5V 12V 24V 36V	I _L		±0.1	±2.0	uA
Capacitance	CPDU5V0 CPDU12V CPDU24V CPDU36V @ 1MHz	C _T		15 12 10 5	20 --- --- ---	pF
Channel clamp voltage	CPDU5V0 CPDU12V CPDU24V CPDU36V 8kV event	V _{ESD}			± 7.0 ± 17 ± 25 ± 40	V
Peak ESD voltage capability	CPDU5V0 CPDU12V CPDU24V CPDU36V IEC 61000-4-2	V _{PV}			16	kV
Peak pulse current	CPDU5V0 CPDU12V CPDU24V CPDU36V 8 / 20 us	I _{PP} *			5.1 15 15 15	A
Package Power	CPDU5V0 CPDU12V CPDU24V CPDU36V	P			100	mW

* one diode conducting.