
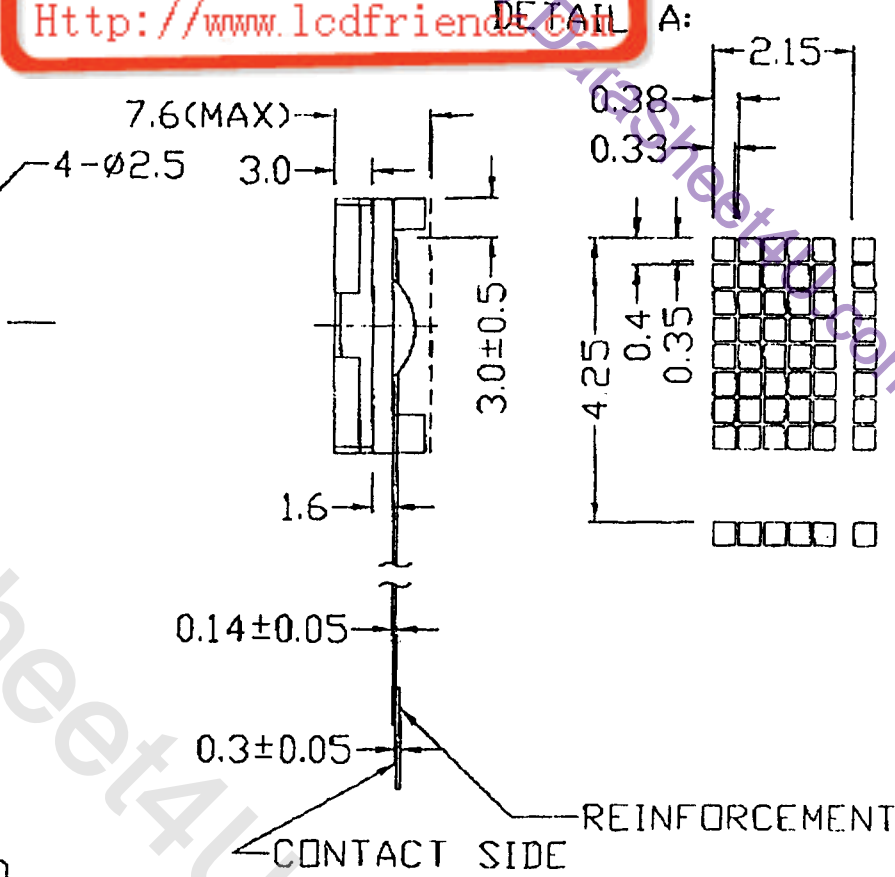


液晶之友 电话: 020-33819057  
 Http://www.lcdfriend.com

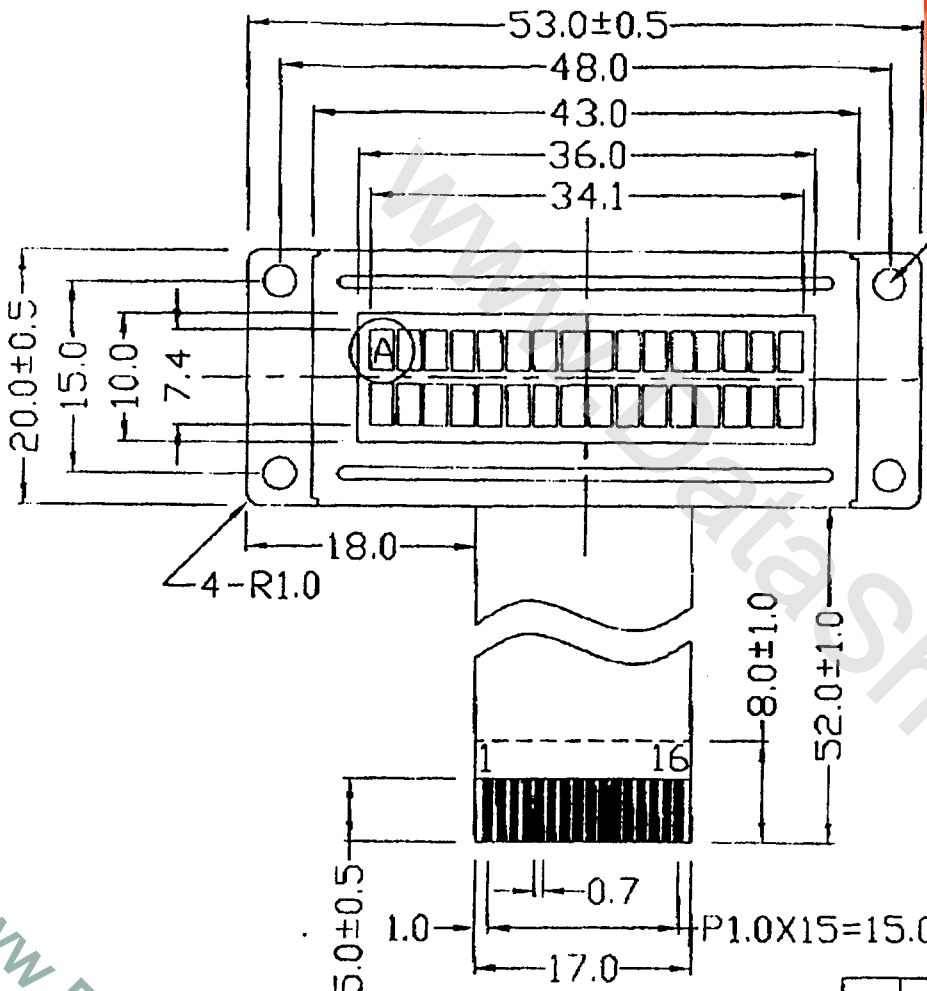

www.DataSheet4U.com

- NOTES:
1. DISPLAY TYPE: TN
  2. VIEWING DIRECTION: 12:00
  3. POLARIZER MODE: REFLECTIVE/POSITIVE
  4. OPERATING TEMP: 0°C~+50°C
  5. STORAGE TEMP: -20°C~+60°C
  6. LCD OPERATING VOLTAGE: 4.2V
  7. DRIVE METHOD: 1/16 DUTY 1/5 BIAS
  8. WITHOUT BACKLIGHT
  9. CONTROLLER: S6A0069X01-COCX(KS0066UP00-CC)
  10. BEZEL IS TO BE PAINTED BLACK
  11. UNMARKED TOLERANCE: ±0.3mm
  12. THERE IS AN ADHESIVE DOUBLE TAPE BETWEEN PCB AND CABLE

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Vss	Vdd	V0	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	NC	NC

**TIAN-MA MICROELECTRONICS CO.**  
 6/F., CASTIC Building, Shennan Road, Central, Shenzhen, China

DRAWN BY: 罗永良	TITLE: TM162XAAU6	
CHECKED BY: 潘志华	DWG NO: G-1	
APPROVED BY: 王彩东	DWG NAME: TM162XAAU6G-1	UNIT: mm
CONFIRMED BY:	SHEET NO. OF	