



ICE Components, Inc.

Voice: 800.729.2099  
Fax: 678.560.9304

cust.serv@icecomp.com  
www.icecomponents.com

# Surface Mount Power Inductors

# LS3316 Series



### FEATURES

- Will Handle up to 5.6A
- Suitable for Pick and Place
- Withstands Solder Reflow
- High Performance Shielded Design


### APPLICATIONS

- Handheld and PDA Applications
- DC/DC Converters
- Output Power Chokes
- Battery Powered or Low Voltage Applications

### PACKAGING

- Reel Diameter: 13"
- Reel Width: 24mm
- Pieces Per Reel: 1000

### Mechanical

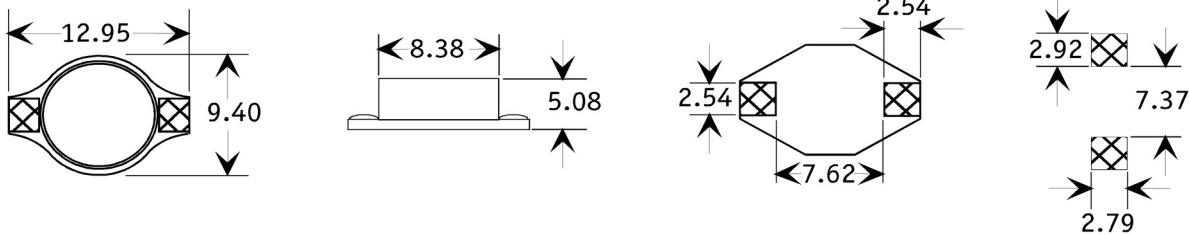

### Electrical Specifications

Part Number	Inductance <sup>1</sup> ( $\mu\text{H} \pm 20\%$ )	DCR max ( $\Omega$ )	$I_{dc}$ max <sup>2</sup> (A)
LS3316-1R0-RM	1.0	0.021	5.60
LS3316-1R5-RM	1.5	0.022	5.20
LS3316-2R2-RM	2.2	0.032	5.00
LS3316-3R3-RM	3.3	0.039	3.90
LS3316-4R7-RM	4.7	0.054	3.20
LS3316-6R8-RM	6.8	0.075	2.80
LS3316-100-RM	10	0.101	2.40
LS3316-150-RM	15	0.150	2.00
LS3316-220-RM	22	0.207	1.60
LS3316-330-RM	33	0.334	1.40
LS3316-470-RM	47	0.472	1.00



1. Tested @ 100kHz, 0.1Vrms.
2. Inductance drop = 10% at rated  $I_{dc}$  max.
3. Operating temperature range: -40°C to +85°C.
4. Electrical specifications at 25°C.
5. Meets UL 94V-0.