

Micro Commercial Components

RoHS

Micro Commercial Components 20736 Marilla Street Chatsworth CA 91311

Phone: (818) 701-4933 Fax: (818) 701-4939 2KBP005 THRU 2KBP10

Features

- Glass Passivate Die Construction
- Epoxy meets UL 94 V-0 flammability rating
- Moisture Sensitivity Level 1
- Ideal for Printed Circuit Boards
- Lead Free Finish/Rohs Compliant (Note1) ("P"Suffix designates Compliant. See ordering information)

Maximum Ratings

- # Storage Temperature: -55∜C to +165∜C


MCC Part Number	Maximum Recurrent Peak Reverse Voltage	Maximum RMS Voltage	Maximum DC Blocking Voltage
2KBP005	50V	35V	50V
2KBP01	100V	70V	100V
2KBP02	200V	140V	200V
2KBP04	400V	280V	400V
2KBP06	600V	420V	600V
2KBP08	800V	560V	800V
2KBP10	1000V	700V	1000V

Electrical Characteristics @ 25 C Unless Otherwise Specified

Average Forward Current	I _{F(AV)}	2.0A	T _a = 50 [†] C		
Peak Forward Surge Current	I _{FSM}	60A	8.3ms, half sine		
Maximum Forward Voltage Drop Per Element	V _F	1.2V	I _F = 2.0A per		
Maximum DC Reverse Current At Rated DC Blocking Voltage	I _R	10σA 0.5mA	T _a = 25∀C T _a = 125∀C		

Notes: 1.High Temperature Solder Exemption Applied,See EU Directive Annex Notes $\, 7 \,$

2.0 Amp Glass Passivated Bridge Rectifier 50 to 1000 Volts

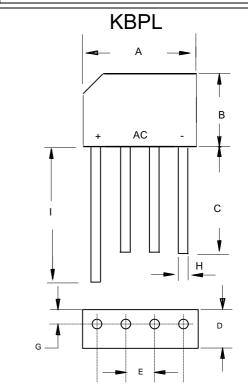

DIMENSIOPNS							
	INCHES		MM				
DIM	MIN	MAX	MIN	MAX			
Α	.559	.60	14.22	15.24			
В	.42	.46	10.60	11.68			
С	.50		12.7				
D	.146	.153	3.70	3.90			
Е	.142	.161	3.60	4.10			
G	.046	.054	1.17	1.37			
Н	.028	.034	0.70	0.90			
	.561		14.25				

2KBP005~2KBP10



Micro Commercial Components

100

FIG. 1 - DERATING CURVE OUTPUT RECTIFIED CURRENT 2.0 60 Hz AVERAGE FORWARD OUTPUT CURRENT, RESISTIVE OR INDUCTIVE LOAD 1.5 P.C.B. MOUNTED WITH 0.47 x 0.47 (12 x 12mm) COPPER PADS CAPACITIVE LOAD lpk/lav=5.0 lpk/lav=10 lpk/I_{AV}=20 (PER LEG)

80

0 L 20

40

60

FORWARD SURGE CURRENT PER LEG 60 T_J=150°C PEAK FORWARD SURGE CURRENT, AMPERES SINGLE SINE-WAVE (JEDEC Method) 50 40 30

1.0 CYCLE

20

10

0

FIG. 2 - MAXIMUM NON-REPETITIVE PEAK

10 NUMBER OF CYCLES AT 60 Hz

FIG. 3 - TYPICAL FORWARD CHARACTERISTICS PER LEG

100

AMBIENT TEMPERATURE, °C

120

140

160 170

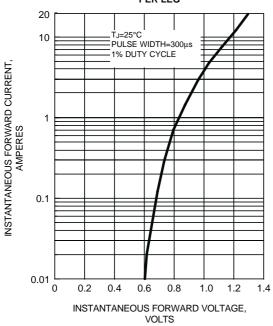


FIG. 4 - TYPICAL REVERSE LEAKAGE **CHARACTERISTICS PER LEG**


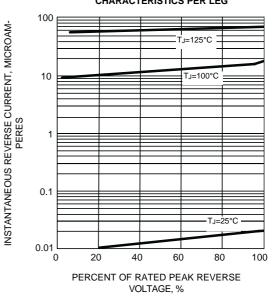


FIG. 5 - TYPICAL JUNCTION CAPACITANCE **PER LEG**



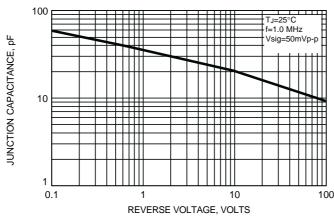

Micro Commercial Components

Ordering Information:

Device	Packing	
Part Number-BP	Bulk: 1Kpcs/Box	

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. **Micro Commercial Components Corp.** does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp.** and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

CUSTOMER AWARENESS

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.