

**FM TUNER FOR CAR AUDIO(DBM)**  
(Satisfied FTZ(CE Mark) Rules)**FEATURES**

- Upper Side Band Super Heterodyne System.
- Intermediate Frequency : 10.7MHz.
- ANT Input Impedance : 75Ω unbalance.
- IF Output Impedance : 300Ω unbalance.
- Receiving Frequency : 87.5~108.0MHz.
- Operation Tuning Voltage: 1.2~8V (Ta=25℃).

**MAXIMUM RATING (Ta=25℃)**

CHARACTERISTIC	SYMBOL	RATING	UNIT
Supply Voltage	V <sub>CC</sub>	10	V
Tuning Voltage	V <sub>T</sub>	8	V
AGC Voltage	V <sub>AGC</sub>	6	V
Operating Temperature Range	T <sub>opr</sub>	-20~70	℃

**TUNING VOLTAGE**

Receiving Frequency [MHZ]	MIN.	TYP.	MAX.	UNIT	Receiving Frequency [MHZ]	MIN.	TYP.	MAX.	UNIT
87.5	1.2	1.5	-	V	98.0	-	3.5	-	V
88.0	-	1.6	-		100.0	-	4.0	-	
90.0	-	1.7	-		102.0	-	4.6	-	
92.0	-	1.8	-		104.0	-	5.3	-	
94.0	-	1.9	-		106.0	-	6.1	-	
96.0	-	2.0	-		108.0	-	7.0	8.0	

# KCF207SV/SH


## ELECTRICAL CHARACTERISTICS(Ta=25)

(Unless Otherwise Specified : V<sub>CC</sub>=8.2V, f<sub>i</sub>=98MHz, Δf=22.5kHz, f<sub>m</sub>=1kHz, V<sub>AGC</sub>=5V)


CHARACTERISTIC	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Power Gain		40	45	-	dB
Gain Balance		-	2	6	dB
Noise Figure		-	6	9	dB
Image Rejection		45	55	-	dB
IF Rejection		60	70	-	dB
1/2 IF Rejection		75	80	-	dB
2 X OSC Rejection		70	80	-	dB
AGC Reduction	5V→0V	14	20	26	dB
OSC Output Voltage	1kΩ Load(rms)	120	200	280	mV
IF Band Width	-3dB	140	180	220	kHz
Current Consumption		-	40	-	mA
OSC +B Stability	STD Voltage ±10%	-	±200	±250	kHz
OSC Frequency Drift Against Strong Signal Input	ANT Input Level 60dBμV→120dBμV	-	±5	±30	kHz
Spurious		Shall be Contented FCC, CE Rules			
OSC Temperature Drift	20±40℃	MAX. ±600			kHz
		MAX. ±6			dB
OSC Stop Voltage		MIN. 4.5			V

\* Standard Testing Condition






1. Temperature Condition : 20±2℃
2. Relative Humidity Condition : 60±5%
3. Allowable Variation of Supply Voltage : ±0.1V(Max.)
4. Allowable Variation of Tuning Voltage : ±0.01V(Max.)

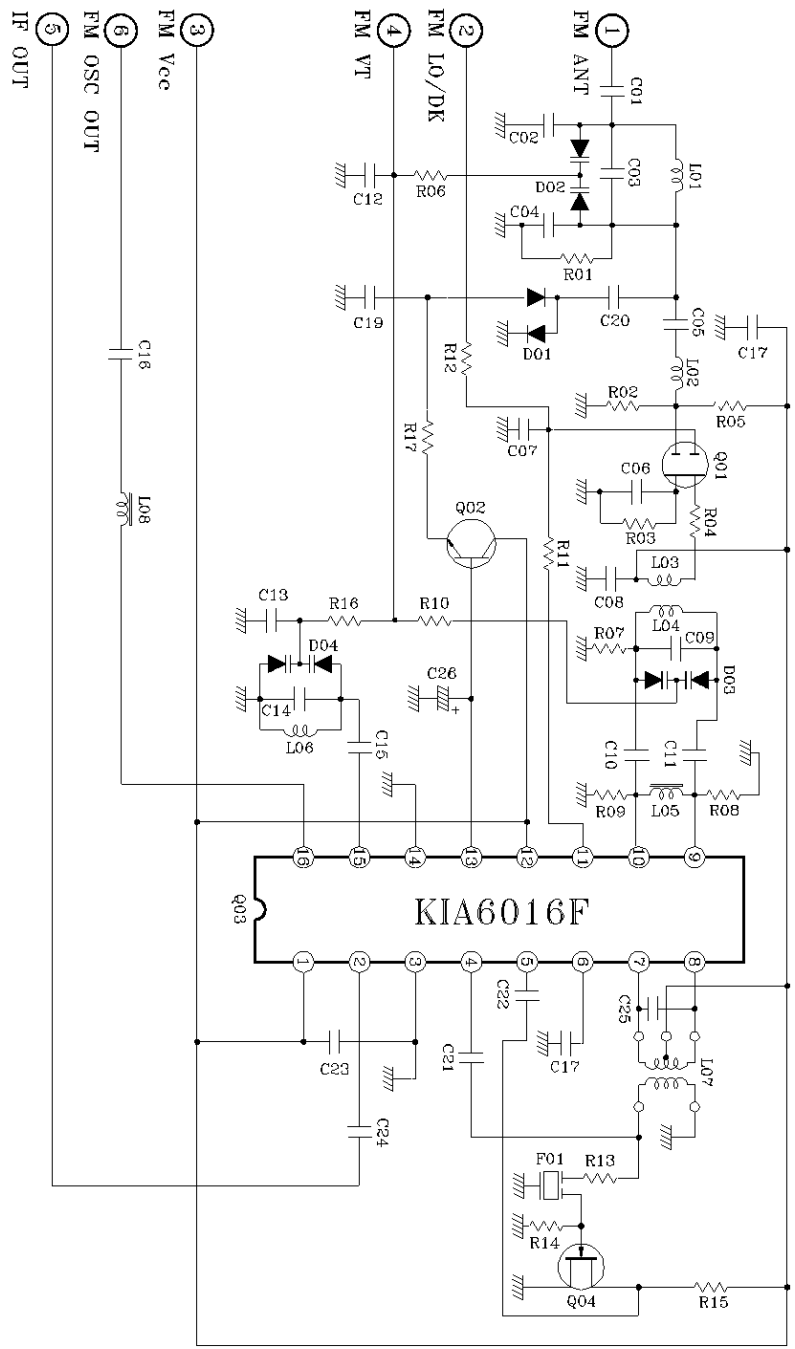

					PAGE : 6/7				
NO	PART'S NAME	MATERIAL		SIZE	TREATMENT	REMARK			
MODEL NO		SCALE	UNIT	DATE	DRAW NO	KCF207SD.DWG			
KCF207		0.9 1	mm	1998. 05. 08					
		REFERENCE			THIRD ANGLE DRAW	DRAW	DESIGN	CHECK	APPRO
		MODULE DEVELOPMENT GROUP				<i>dkw</i>			






* TERMINALS	
1	A N T
2	A G C
3	B+
4	VT
5	IF OUT
6	OSC OUT

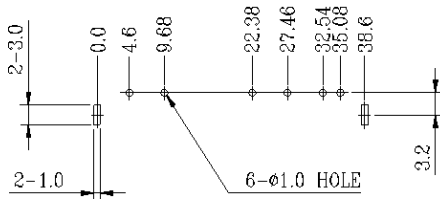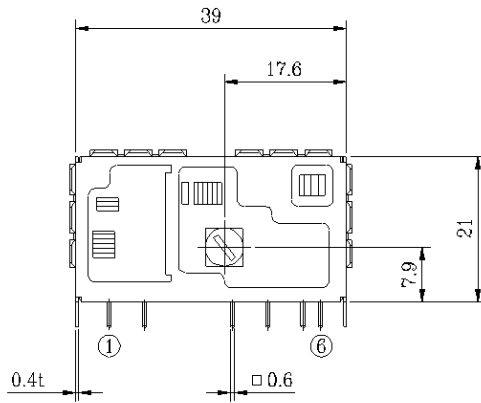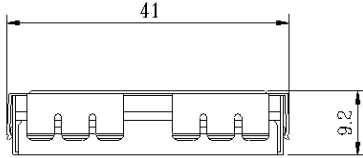






HOLE DIMENSIONS (TOP VIEW) \*TOLERANCE : ±0.1

\* TOLERANCE : ±0.5

OUT LINE										
NO	PART'S NEME		MATERIAL		SIZE	TREATMENT		REMARK		
MODEL NO		SCALE	UNIT	DATE		DRAW NO	T1 - U2 - C00 - 0062			
KCF207SV		1/1	mm	1998. 08. 04				DRAW	DESIGN	CHECK
		REFERENCE					MODULE DEVELOPMENT GROUP			



* TERMINALS	
1	A N T
2	A G C
3	B+
4	VT
5	IF OUT
6	OSC OUT

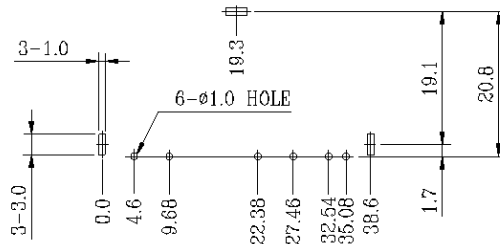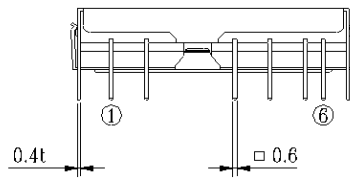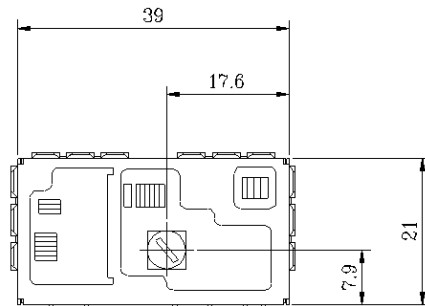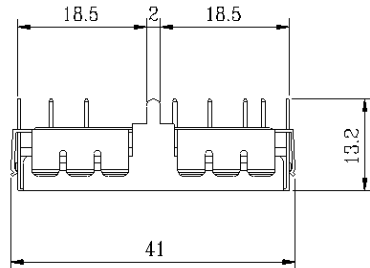

HOLE DIMENSIONS (TOP VIEW) \*TOLERANCE : ±0.1

\* TOLERANCE : ±0.5

OUT LINE										
NO	PART'S NEME		MATERIAL		SIZE	TREATMENT		REMARK		
MODEL NO		SCALE	UNIT	DATE		DRAW NO	T1 - U2 - C00 - 0061			
KCF207SH		1/1	mm	1998. 08. 04				DRAW	DESIGN	CHECK
		REFERENCE				MODULE DEVELOPMENT GROUP				