
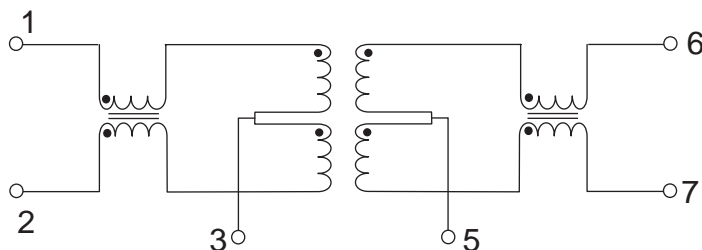


PART NUMBER: XF3506SIP

- This line of products is designed specifically for 100Mbps TP-FDDI, 100 BASE-TX and 255Mbps ATM applications. Other physical and mechanical versions are available. Ideal for use with the Micro Linear ML6673 and 6674.

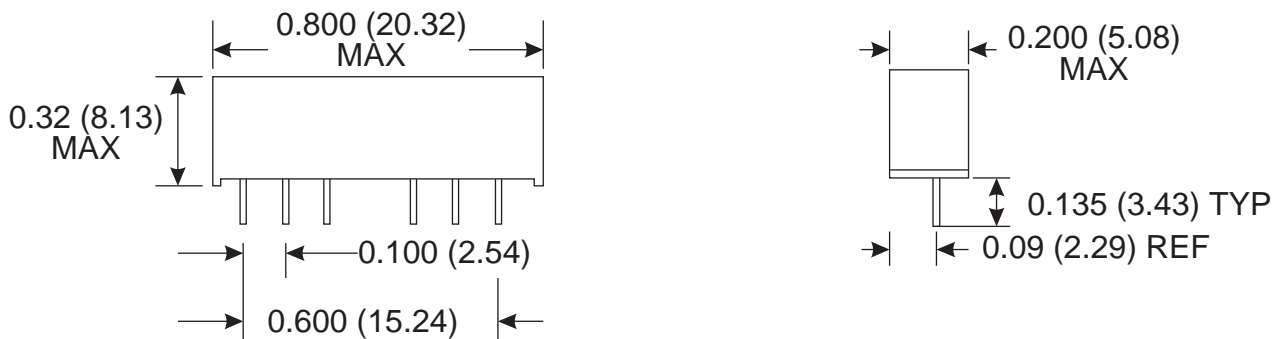

ELECTRICAL SPECIFICATIONS AT 25°C:

INSERTION LOSS (dB) MAX
100KHz TO 100MHz : -1.0

RETURN LOSS (dB) MIN
100KHz TO 30MHz : -16
30MHz TO 80 MHz : -10

RISE TIME (nS) TYP
10% - 90% : 2.5

COMMON TO DIFFERENTIAL
MODE REJECTION (dB) MIN : 40

COMMON TO COMMON
MODE REJECTION : 30