

High Precision Leaded Resistors



DESCRIPTION

A homogenous film of metal alloy is deposited on a high grade ceramic body. After a helical groove has been cut in the resistive layer, tinned connecting wires of electrolytic copper are welded to the end-caps. The resistors are coated with lacquer which provides electrical, mechanical, and climatic protection.

FEATURES

- High precision resistors (TCR up to ± 5 ppm/K, 0.01 % tol.)
- High stability (0.05 %)
- Low temperature coefficient (up to ± 5 ppm/K)
- Lead (Pb)-free solder contacts
- Pure tin plating provides compatibility with lead (Pb)-free and lead containing soldering processes
- Compatible with "Restriction of the use of Hazardous Substances" (RoHS) directive 2002/95/EC (issue 2004)



APPLICATIONS

- Test and measurement
- Telecom

TECHNICAL SPECIFICATIONS		
DESCRIPTION	MPR24	
CECC Size, DIN Size	B, 0207	
Resistance Range	10 Ω to 1 M Ω	
Resistance Tolerance	± 0.05 %; ± 0.02 %; ± 0.01 %	± 0.5 %; ± 0.25 %; ± 0.1 %
Temperature Coefficient	± 25 ppm/K; ± 15 ppm/K; ± 10 ppm/K; ± 05 ppm/K	
Climatic Category (LCT/UCT/Days)	55/125/56	55/155/56
Max. Rated Dissipation, P_{70}	0.125 W	0.25 W
Operating Voltage, U_{max} . AC/DC	250 V	
Film Temperature	125 $^{\circ}$ C	155 $^{\circ}$ C
Max. Resistance Change for Resistance Range, ΔR max., After:		
Load	$\pm (0.05$ % $R + 0.01$ $\Omega)$	
Climatic Tests	$\pm (0.05$ % $R + 0.01$ $\Omega)$	
Soldering	$\pm (0.01$ % $R + 0.01$ $\Omega)$	
Short Time Overload	$\pm (0.01$ % $R + 0.01$ $\Omega)$	
Permissible Voltage Against Ambient :		
1 Min; U_{ins}	500 V	
Continuous	75 V	
Failure Rate	$\leq 0.3 \times 10^{-9}$ /h	



12NC INFORMATION

Components may be ordered by using either a simple clear text ordering code, see "Type Description and Ordering Code" or Vishay BCcomponents' unique 12NC.

- The resistors have a 12-digit numeric code starting with 2322 14.
- The subsequent 3 digits indicate the resistor type, specification and packaging; see the 12NC table.

- The remaining 3 digits indicate the resistance value. The number is available upon request and is fixed by the supplier.

12NC Example

The 12NC of an MPR24 resistor with tolerance of $\pm 0.02\%$ and TCR ± 05 ppm/K, taped on bandolier in box of 100 units starts with 2322 141 77...; the last 3 digits are available upon request and are fixed by the supplier.

12NC - resistor type and packaging					
DESCRIPTION			ORDERING CODE 2322 14.		
			BANDOLIER IN BOX	BANDOLIER IN BOX	BANDOLIER ON REEL
TYPE	TCR	TOL.	100 units	1000 units	5000 units
MPR24	± 25 ppm/K	$\pm 0.5\%$	1 00...	1 10...	3 10...
		$\pm 0.25\%$	1 20...	1 30...	3 30...
		$\pm 0.1\%$	1 40...	1 50...	3 50...
		$\pm 0.05\%$	1 64...	3 64...	-
		$\pm 0.02\%$	1 74...	3 74...	-
		$\pm 0.01\%$	1 84...	3 84...	-
	± 15 ppm/K	$\pm 0.5\%$	1 05...	1 15...	3 15...
		$\pm 0.25\%$	1 25...	1 35...	3 35...
		$\pm 0.1\%$	1 45...	1 55...	3 55...
		$\pm 0.05\%$	1 65...	3 65...	-
		$\pm 0.02\%$	1 75...	3 75...	-
		$\pm 0.01\%$	1 85...	3 85...	-
	± 10 ppm/K	$\pm 0.5\%$	1 06...	1 16...	3 16...
		$\pm 0.25\%$	1 26...	1 36...	3 36...
		$\pm 0.1\%$	1 46...	1 56...	3 56...
		$\pm 0.05\%$	1 66...	3 66...	-
		$\pm 0.02\%$	1 76...	3 76...	-
		$\pm 0.01\%$	1 86...	3 86...	-
	± 5 ppm/K	$\pm 0.5\%$	1 07...	1 17...	3 17...
		$\pm 0.25\%$	1 27...	1 37...	3 37...
		$\pm 0.1\%$	1 47...	1 57...	3 57...
		$\pm 0.05\%$	1 67...	3 67...	-
		$\pm 0.02\%$	1 77...	3 77...	-
		$\pm 0.01\%$	1 87...	3 87...	-

PART NUMBER AND PRODUCT DESCRIPTION

PART NUMBER: MPR24000E1001DC100

M	P	R	2	4	0	0	0	E	1	0	0	1	D	C	1	0	0
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

MODEL/SIZE MPR2400	SPECIAL CHARACTER 0 = Neutral	TCR Z = ± 5 ppm/K Y = ± 10 ppm/K X = ± 15 ppm/K E = ± 25 ppm/K	VALUE 3 digit value 1 digit multiplier MULTIPLIER 9 = *10 ⁻¹ 2 = *10 ² 0 = *10 ⁰ 3 = *10 ³ 1 = *10 ¹ 4 = *10 ⁴	TOLERANCE T = ± 0.01 % H = ± 0.02 % A = ± 0.05 % B = ± 0.1 % C = ± 0.25 % D = ± 0.5 %	PACKAGING (1) RP CU C1	SPECIAL Up to 2 digits 00 = Standard
------------------------------	---	---	---	--	--	---

PRODUCT DESCRIPTION: MPR24 - 25 0.5 % C1 1K0


MPR24 MODEL/SIZE MPR24	25 TCR Z = 5 ppm Y = 10 ppm X = 15 ppm E = 25 ppm	0.5 % TOLERANCE ± 0.01 % ± 0.02 % ± 0.05 % ± 0.1 % ± 0.25 % ± 0.5 %	C1 PACKAGING (1) RP CU C1	1K0 RESISTANCE VALUE 1K0 = 1 kΩ 50R5 = 50.5 Ω
-------------------------------------	---	---	--	---

Notes:

(1) Please refer to table PACKAGING for complete information

- The PART NUMBER is shown to facilitate the introduction of a unified part numbering system for ordering products

DIMENSIONS

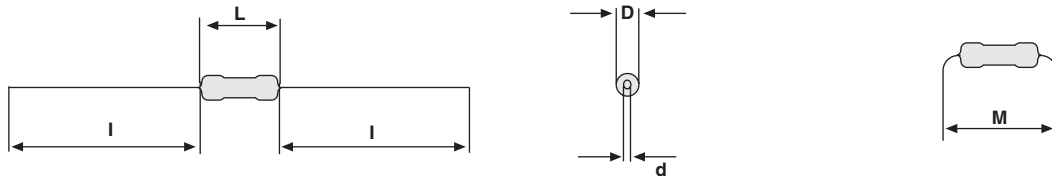

DIMENSIONS - leaded resistor types, mass and relevant physical dimensions

TYPE	D _{max.} (mm)	L _{max.} (mm)	d _{nom.} (mm)	I _{min.} (mm)	M _{min.} (mm)	MASS (mg)
MPR 24	2.5	6.3	0.6	28.0	7.5	220

SCRIPT MARKING (2)

TEMPERATURE COEFFICIENT AND TOLERANCE - printed resistance value and letter coding

RESISTANCE VALUE	TOL. (%)	LETTER CODE	TCR (ppm/K)	LETTER CODE
Clear text code for value	± 0.5	D	± 25	E
	± 0.25	C	± 15	F
	± 0.1	B	± 10	B
	± 0.05	A	± 05	A
	± 0.02	P	-	-
	± 0.01	T	-	-

Note:

(2) Resistors of TCR ± 25 ppm/K in combination with tolerances ± 0.5 %, ± 0.25 % and ± 0.1 % are only available with color coding in accordance with IEC 60062.



TEMPERATURE COEFFICIENT AND RESISTANCE RANGE		
DESCRIPTION		RESISTANCE VALUE ⁽²⁾
TCR ⁽¹⁾	TOLERANCE	MPR24
± 25 ppm/K	± 0.5 %	10 Ω to 1 MΩ
	± 0.25 %	10 Ω to 1 MΩ
	± 0.1 %	10 Ω to 1 MΩ
	± 0.05 %	24 Ω to 100 kΩ
	± 0.02 %	24 Ω to 100 kΩ
	± 0.01 %	24 Ω to 100 kΩ
± 15 ppm/K	± 0.5 %	10 Ω to 1 MΩ
	± 0.25 %	10 Ω to 1 MΩ
	± 0.1 %	10 Ω to 1 MΩ
	± 0.05 %	24 Ω to 100 kΩ
	± 0.02 %	24 Ω to 100 kΩ
	± 0.01 %	24 Ω to 100 kΩ
± 10 ppm/K	± 0.5 %	10 Ω to 1 MΩ
	± 0.25 %	10 Ω to 1 MΩ
	± 0.1 %	10 Ω to 1 MΩ
	± 0.05 %	24 Ω to 100 kΩ
	± 0.02 %	24 Ω to 100 kΩ
	± 0.01 %	24 Ω to 100 kΩ
± 5 ppm/K	± 0.5 %	10 Ω to 1 MΩ
	± 0.25 %	10 Ω to 1 MΩ
	± 0.1 %	10 Ω to 1 MΩ
	± 0.05 %	24 Ω to 100 kΩ
	± 0.02 %	24 Ω to 100 kΩ
	± 0.01 %	24 Ω to 100 kΩ


Notes:

(1) The temperature coefficient is specified over the temperature range + 20 °C to + 70 °C.

(2) Resistance values to be selected from E192 series, for other values please contact the factory.

PACKAGING				
MODEL	REEL		BOX	
	PIECES/REEL	CODE	PIECES/BOX	CODE
MPR24	5000	RP	100 1000	CU C1

FUNCTIONAL PERFORMANCE

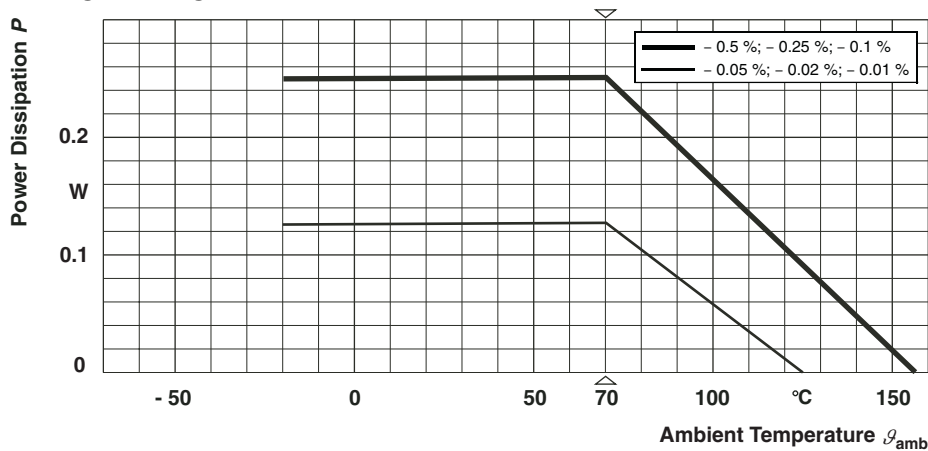

Derating - Depending on Resistance Tolerances

TESTS AND REQUIREMENTS

Essentially all tests are carried out in accordance with the following specifications:

EN 140000/IEC 60115-1, Generic specification (includes tests)

EN 140100/IEC 60115-2, Sectional specification (includes schedule for qualification approval)

CECC 40101-806, Detail specification (includes schedule for conformance inspection)

Most of the components are approved in accordance with the European CECC-system, where applicable. The following table contains only the most important tests. For the full test schedule refer to the documents listed above. The testing also covers most of the requirements specified by EIA/IS-703 and JIS-C-5202.

The tests are carried out in accordance with IEC 60 068 and under standard atmospheric conditions in accordance with

IEC 60068-1, 5.3. Climatic category LCT/UCT/56 (rated temperature range: Lower Category Temperature, Upper Category Temperature; damp heat, long term, 56 days) is valid.

Unless otherwise specified the following values apply:

Temperature: 15 °C to 35 °C

Relative humidity: 45 % to 75 %

Air pressure: 86 kPa to 106 kPa (860 mbar to 1060 mbar).

For testing the components are mounted on a test board in accordance with IEC 60115-1, 4.31 unless otherwise specified.

In the Test Procedures and Requirements table only the tests and requirements are listed with reference to the relevant clauses of IEC 60115-1 and IEC 60068-2; a short description of the test procedure is also given.

TEST PROCEDURES AND REQUIREMENTS					
IEC 60115-1 CLAUSE	IEC 60068-2 TEST METHOD	TEST	PROCEDURE	REQUIREMENTS PERMISSIBLE CHANGE (ΔR)	
			Stability for product types:	24 Ω to 100 k Ω	4.99 Ω to < 24 Ω ; > 100 k Ω to 1 M Ω
4.5	-	resistance ($\Delta R/R$)	-	$\pm 0.5\%$; $\pm 0.25\%$; $\pm 0.1\%$; $\pm 0.05\%$; $\pm 0.02\%$; $\pm 0.01\%$	$\pm 0.5\%$; $\pm 0.25\%$; $\pm 0.1\%$
4.8.4.2	-	temperature coefficient	at 20/70/20 °C	± 25 ppm/K; ± 15 ppm/K; ± 10 ppm/K; ± 05 ppm/K	
			at 20/LCT/20 °C and 20/UCT/20 °C	± 25 ppm/K	
4.25.1	-	endurance at 70 °C	$U = \sqrt{P_{70} \times R}$ or $U = U_{max.}$; 1.5 h ON; 0.5 h OFF 70 °C; 2000 h	$\pm (0.05\% R + 0.01 \Omega)$	
4.24	78 (Cab)	damp heat, steady state	(40 \pm 2) °C; 56 days; (93 \pm 3) % RH	$\pm (0.05\% R + 0.01 \Omega)$	
4.23	2 (Ba) 30 (Db)	climatic sequence:			
4.23.2		dry heat	125 °C; 16 h		
4.23.3		damp heat, cyclic	55 °C; 24 h; 90 % to 100 % RH; 1 cycle		

TEST PROCEDURES AND REQUIREMENTS					
IEC 60115-1 CLAUSE	IEC 60068-2 TEST METHOD	TEST	PROCEDURE	REQUIREMENTS PERMISSIBLE CHANGE (ΔR)	
			Stability for product types:	24 Ω to 100 k Ω	4.99 Ω to < 24 Ω ; > 100 k Ω to 1 M Ω
4.23.4 4.23.5 4.23.6	1 (Aa) 13 (M) 30 (Db)	cold low air pressure damp heat, cyclic	- 55 °C; 2 h 8.5 kPa; 2 h; 15 °C to 35 °C 55 °C; 5 days; 95 % to 100 % RH; 5 cycles	$\pm (0.05 \% R + 0.01 \Omega)$ no visible damage	
4.13	-	short time overload	Room temperature; $U = 2.5 \times \sqrt{P_{70}} \times R$ or $U = 2 \times U_{max.}$; 5 s	$\pm (0.01 \% R + 0.01 \Omega)$ no visible damage	
4.19	14 (Na)	rapid change of temperature	30 min at LCT and 30 min at UCT; 5 cycles	$\pm (0.01 \% R + 0.01 \Omega)$ no visible damage	
4.29	45 (XA)	component solvent resistance	Isopropyl alcohol + 23 °C; toothbrush method	marking legible; no visible damage	
4.18.2	20 (Tb)	resistance to soldering heat	unmounted components; (260 \pm 5) °C; (10 \pm 1) s	$\pm (0.01 \% R + 0.01 \Omega)$ no visible damage	
4.17	20 (Ta)	solderability	+ 235 °C; 2 s solder bath method	good tinning ($\geq 95 \%$ coverage);	
4.22	6 (B4)	vibration	6 h; 10 Hz to 2000 Hz 1.5 mm or 196 m/s ²	$\pm (0.01 \% R + 0.01 \Omega)$; no visible damage	
4.16	21 (Ua ₁) 21 (Ub) 21 (Uc)	robustness of terminations	tensile, bending and torsion	$\pm (0.01 \% R + 0.01 \Omega)$; no visible damage	
4.7	-	voltage proof	$U_{RMS} = U_{ins.}$; 60 s	no flashover or breakdown	
4.12	-	noise	IEC 60 195: $R \leq 100 \text{ k}\Omega$ $R > 100 \text{ k}\Omega$	max. 0.25 $\mu\text{V/V}$ max. 0.5 $\mu\text{V/V}$	



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.