
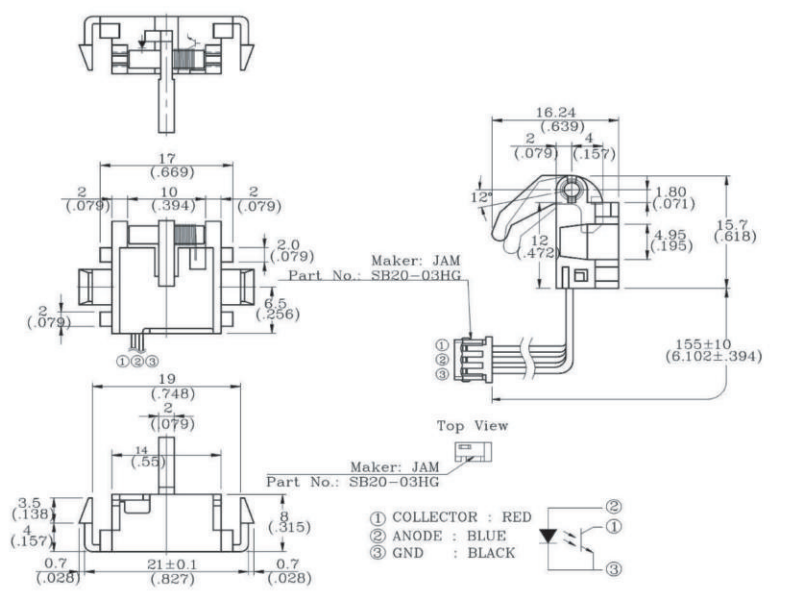




Photo Interrupters Actuator Type


Part No.	Package (mm [Inch])	V_F @ $I_F=20\text{mA}$	I_R @ $V_R=5\text{V}$	I_D @ $V_{CE}=10\text{V}$	$V_{CE(sat)}$ @ $I_C=0.25\text{mA}$ $I_F=10\text{mA}$	I_L @ $V_{CE}=5\text{V}$ $I_F=10\text{mA}$	Tr/Tf @ $I_{FP}=20\text{mA}$ $V_{CE}=5\text{V}$ $R_L=1\text{K}$
----------	---------------------	------------------------------	----------------------------	--------------------------------	---	--	--






Tolerance: ± 0.25

BPI-3C2-07W1	Max.1.5V	Max.100uA	Max.100nA	Max.0.4V	Min.0.5mA	Typ.20/20
--------------	----------	-----------	-----------	----------	-----------	-----------



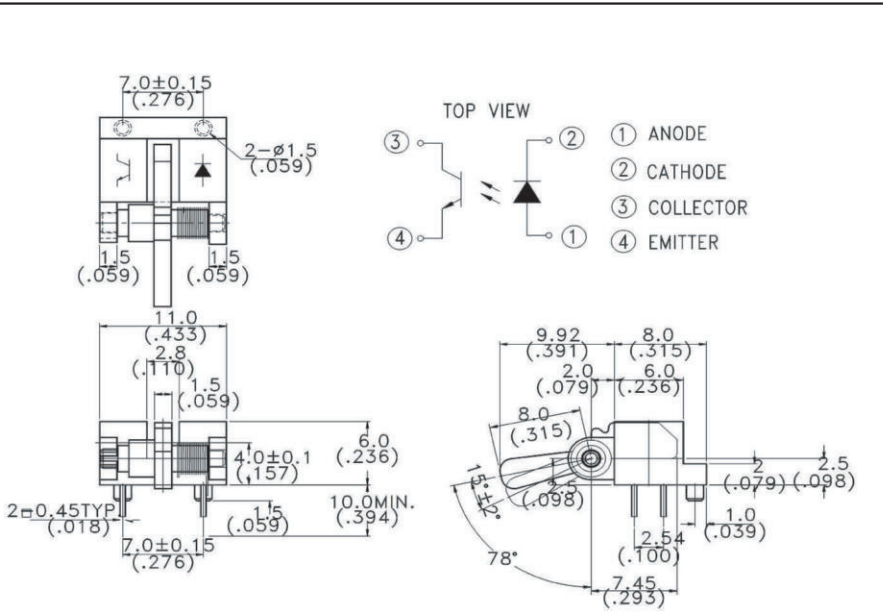

Tolerance: ± 0.25

BPI-3C2-08	Max.1.5V	Max.100uA	Max.100nA	Max.0.4V	Min.0.5mA	Typ.20/20
------------	----------	-----------	-----------	----------	-----------	-----------