

INTERNATIONAL PC MOUNT POWER TRANSFORMERS

PART NO. PC MOUNT	VA (SIZE)	SECONDARY RMS RATING	
		SERIES	PARALLEL
LP-10-250	2.5	10.0V C.T. @ 0.25A	5.0V @ 0.50A
LP-10-500	5.0	10.0V C.T. @ 0.50A	5.0V @ 1.00A
LP-10-1000	10.0	10.0V C.T. @ 1.00A	5.0V @ 2.00A
LP-10-2000	20.0	10.0V C.T. @ 2.00A	5.0V @ 4.00A
LP-10-3000	30.0	10.0V C.T. @ 3.00A	5.0V @ 6.00A
LP-10-600	56.0	10.0V C.T. @ 5.60A	5.0V @ 11.20A
LP-10-250	2.5	12.6V C.T. @ 0.20A	6.3V @ 0.40A
LP-10-500	5.0	12.6V C.T. @ 0.40A	6.3V @ 0.80A
LP-10-1000	10.0	12.6V C.T. @ 0.80A	6.3V @ 1.60A
LP-10-2000	20.0	12.6V C.T. @ 1.60A	6.3V @ 3.20A
LP-10-3000	30.0	12.6V C.T. @ 2.40A	6.3V @ 4.80A
LP-10-5600	56.0	12.6V C.T. @ 4.40A	6.3V @ 8.80A
LP-10-250	2.5	16.0V C.T. @ 0.15A	8.0V @ 0.30A
LP-10-500	5.0	16.0V C.T. @ 0.31A	8.0V @ 0.62A
LP-10-1000	10.0	16.0V C.T. @ 0.62A	8.0V @ 1.25A
LP-10-2000	20.0	16.0V C.T. @ 1.25A	8.0V @ 2.50A
LP-10-3000	30.0	16.0V C.T. @ 1.90A	8.0V @ 3.80A
LP-10-5600	56.0	16.0V C.T. @ 3.50A	8.0V @ 7.00A
LP-10-250	2.5	20.0V C.T. @ 0.12A	10.0V @ 0.24A
LP-10-500	5.0	20.0V C.T. @ 0.25A	10.0V @ 0.50A
LP-10-1000	10.0	20.0V C.T. @ 0.50A	10.0V @ 1.00A
LP-10-2000	20.0	20.0V C.T. @ 1.00A	10.0V @ 2.00A
LP-10-3000	30.0	20.0V C.T. @ 1.50A	10.0V @ 3.00A
LP-10-5600	56.0	20.0V C.T. @ 2.80A	10.0V @ 5.60A
LP-10-250	2.5	24.0V C.T. @ 0.10A	12.0V @ 0.20A
LP-10-500	5.0	24.0V C.T. @ 0.21A	12.0V @ 0.42A
LP-10-1000	10.0	24.0V C.T. @ 0.42A	12.0V @ 0.84A
LP-10-2000	20.0	24.0V C.T. @ 0.83A	12.0V @ 1.66A
LP-10-3000	30.0	24.0V C.T. @ 1.25A	12.0V @ 2.50A
LP-10-5600	56.0	24.0V C.T. @ 2.33A	12.0V @ 4.66A
LP-10-250	2.5	28.0V C.T. @ 0.09A	14.0V @ 0.18A
LP-10-500	5.0	28.0V C.T. @ 0.18A	14.0V @ 0.36A
LP-10-1000	10.0	28.0V C.T. @ 0.36A	14.0V @ 0.72A
LP-10-2000	20.0	28.0V C.T. @ 0.72A	14.0V @ 1.44A
LP-10-3000	30.0	28.0V C.T. @ 1.06A	14.0V @ 2.12A
LP-10-5600	56.0	28.0V C.T. @ 2.00A	14.0V @ 4.00A
LP-10-250	2.5	36.0V C.T. @ 0.07A	18.0V @ 0.14A
LP-10-500	5.0	36.0V C.T. @ 0.14A	18.0V @ 0.28A
LP-10-1000	10.0	36.0V C.T. @ 0.28A	18.0V @ 0.56A
LP-10-2000	20.0	36.0V C.T. @ 0.56A	18.0V @ 1.12A
LP-10-3000	30.0	36.0V C.T. @ 0.82A	18.0V @ 1.64A
LP-10-5600	56.0	36.0V C.T. @ 1.56A	18.0V @ 3.12A




E58127
E78675
E154515



CERTIFIED
LR52082

CLASS A, B AND F INSULATION SYSTEMS FILE NO. E154515 FOR CLASS B AND F

These transformers are available in both PC and chassis-mount construction. With power ratings of 2.5VA to 175VA. These transformers are built with dual-bobbins and insulating shrouds to provide 4,000V RMS isolation between the primary and the secondary.

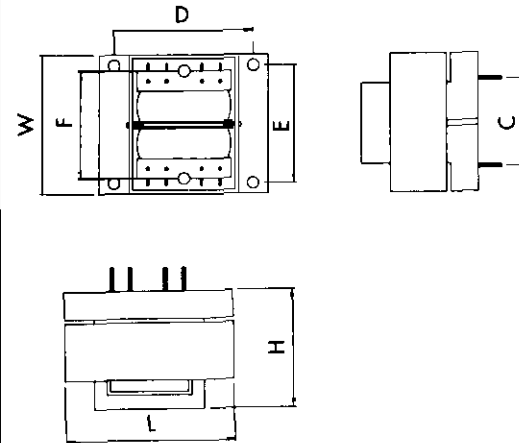

MECHANICAL DIMENSIONS

VA	WT	L	W	H	A	B	C	D	E	F	PIN DIM
2.5	0.25	1.625	1.312	1.125	0.200	0.250	1.000	-	-	1.062	0.025 SQ
5.0	0.37	1.625	1.312	1.375	0.200	0.400	1.000	-	-	1.062	0.025 SQ
10.0	0.53	1.875	1.562	1.375	0.200	0.400	1.140	-	-	1.250	0.038 SQ
20.0	0.90	2.250	1.875	1.625	0.400	0.400	1.460	-	-	1.500	0.038 SQ
30.0	1.15	2.625	2.187	1.562	0.550	0.275	1.680	2.18	2.75	-	0.450 SQ
56.0	1.70	3.000	2.500	1.812	0.600	0.300	1.900	2.50	2.00	-	0.450 SQ