

Straight through hole type female connector for PCB
LPC-()FDS()

2 mm pitch connector

For PCB

Straight Through hole



RoHS



● Configuration of product Part No.

LPC- () FDS ()

- ① ② ③
- ① Series name
 - ② No. of contacts: 2-25
 - ③ Contact plating
 +C : Tin copper plate
 +G : Gold plate

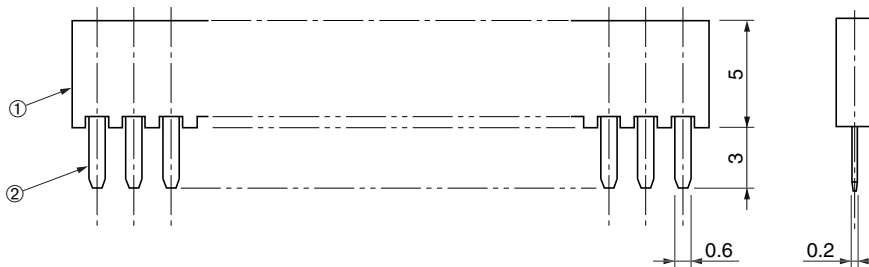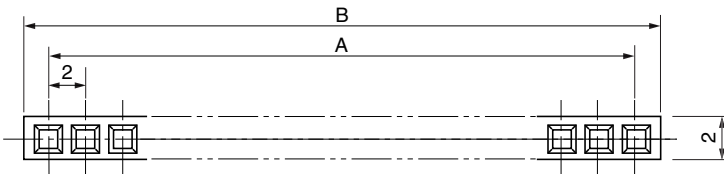

● Dimensions

Part No.	A	B
LPC-2FDS()	2	4.6
LPC-3FDS()	4	6.6
LPC-4FDS()	6	8.6
LPC-5FDS()	8	10.6
LPC-6FDS()	10	12.6
LPC-7FDS()	12	14.6
LPC-8FDS()	14	16.6
LPC-9FDS()	16	18.6
LPC-10FDS()	18	20.6
LPC-11FDS()	20	22.6
LPC-12FDS()	22	24.6
LPC-13FDS()	24	26.6
LPC-14FDS()	26	28.6
LPC-15FDS()	28	30.6
LPC-16FDS()	30	32.6
LPC-17FDS()	32	34.6
LPC-18FDS()	34	36.6
LPC-19FDS()	36	38.6
LPC-20FDS()	38	40.6
LPC-21FDS()	40	42.6
LPC-22FDS()	42	44.6
LPC-23FDS()	44	46.6
LPC-24FDS()	46	48.6
LPC-25FDS()	48	50.6

● Components

①	Insulator
②	Contacts

Because some combinations of "Configurations of Product Part No.", are under consideration for development, please contact us for availability details.

Mating connectors: LPC series male connectors

Accessories: Polarization key: LPC-PK1