


## TCP7330 Series Plug (5P) $h = 9$ mm



**TCP7335-010177**  
Half Lock Type

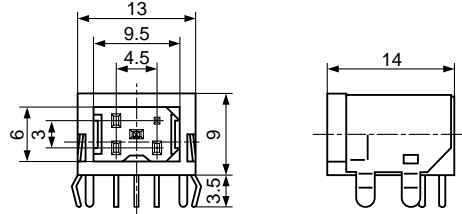

Contacts	Key Type 1	Key Type 2	Key Type 3	Hole Layout (Bottom View)
3				
	TCP7333-010177	*TCP7333-011177	*TCP7333-012177	
4				
	TCP7334-010177	*TCP7334-011177	*TCP7334-012177	
5				
	TCP7335-010177	*TCP7335-011177	*TCP7335-012177	

Rating	Pin Nos. 1-3	5 A 12 V DC max.
	Pin Nos. 4, 5	1 A 12 V DC max.
Insulation Resistance	50 MΩ min. at 250 V DC	
Dielectric Strength	250 V AC / 1 minute	
Contact Resistance	30 mΩ max.	
Insertion Force	49 N max.	
Withdrawal Force	9.8 N to 49 N	

1. Socket Suitability.  
The Sockets are suitable for use with the TCS7330 Series (see page 6).
2. Color: Black
3. \* : Upon your request (standard item).