


AN AMERICAN MANUFACTURER




CML 8 Series — Indicator Lights

5
Indicator
Products

CONFIGURATION

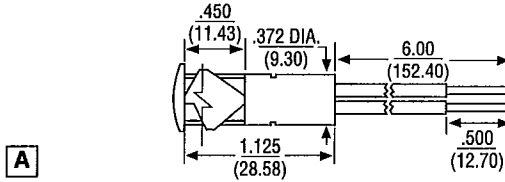

LENS STYLE



How To Order:

8 A 2 B N 4

Series	Configuration	Lens Style	Lens Color	Lens Type	Lamp Type
8	A (Standard Body w/ 6" Wire Leads)	1 (Flat)	A (Amber)	N* (Non-Diffused, Transparent) T (Translucent)**	1 (6.3V Incandescent)
		2 (Dome)	B (Blue)		2 (14V Incandescent)
		3 (Semi Dome)	C (Clear "N" Only) G (Green) R (Red) W (White Type "T" Only)		3 (28V Incandescent)
					4 (125V Neon)* 5 (250V Neon)* 6G (2V Green LED) 6R (2V Red LED) 6Y (2V Yellow LED) 7G (6V Green LED) 7R (6V Red LED) 7Y (6V Yellow LED) 8G (14V Green LED) 8R (14V Red LED) 8Y (14V Yellow LED) 9G (28V Green LED) 9R (28V Red LED) 9Y (28V Yellow LED)

* Recommended for LEDs and Neon lamps
** Only available in Lens Style 1

* CML will utilize green and blue Neon lamps where appropriate

Mounting Information:

- All Chicago Miniature Lamp 8 Series indicator lights snapfit into a 0.375 (9.5mm) diameter mounting hole.
- No additional mounting hardware is required.
- These indicator lights will mount in a panel thickness of 0.032 (0.81mm) minimum to 0.094 (2.4mm) maximum.
- Maximum panel depth required is 1.00 (25.4mm).

Materials:

- These indicator light bodies are molded of high temperature Lexan.
- Wire leads on neon lamps are 20 AWG with 105°C red and black plastic insulation.
- Wire leads on incandescent lamp types are 24 AWG with 105°C black plastic insulation.
- Wire leads on LED type are 24 AWG with 105°C red plastic insulation on the anode side, cathode lead is blue on 2V, white on 6V, black on 12V and yellow on 24V.
- Bezels are nickel plated brass.
- Quick connect terminals are brass.

Agency Approvals:

- All CML 8 Series indicator lights are Recognized by Underwriters Laboratories to 250V and CSA Certified from 125V to 277V.