



# Frontier Electronics Corp.

667 E. COCHRAN STREET, SIMI VALLEY, CA 93065

TEL: (805) 522-9998 FAX: (805) 522-9989

E-mail: [frontiersales@frontierusa.com](mailto:frontiersales@frontierusa.com)

Web: <http://www.frontierusa.com>

## 1.5A FAST RECOVERY PLASTIC RECTIFIER


### BYV95AP THRU BYV96EP

#### FEATURES

- FAST RECOVERY TIMES
- UL 94VO FLAME RETARDANT EPOXY MOLDING COMPOUND
- LOW COST
- HIGH SURGE CURRENT CAPABILITY
- DIFFUSED JUNCTION

#### MECHANICAL DATA

- CASE: TRANSFER MOLDED, DO15, DIMENSIONS IN INCHES AND (MILLIMETERS)
- TERMINAL: SOLDERABLE PER MIL-STD-202, METHOD 208
- POLARITY: CATHODE INDICATED BY COLOR BAND
- WEIGHT: 0.4 GRAMS

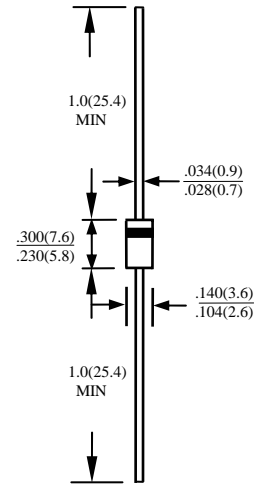

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS RATINGS AT 25°C AMBIENT TEMPERATURE UNLESS OTHERWISE SPECIFIED SINGLE PHASE, HALF WAVE, 60 HZ, RESISTIVE OR INDUCTIVE LOAD. FOR CAPACITIVE LOAD, DERATE CURRENT BY 20%

RATINGS	SYMBOL	BYV95AP	BYV95BP	BYV95CP	BYV96DP	BYV96EP	UNITS
MAXIMUM RECURRENT PEAK REVERSE VOLTAGE	$V_{RRM}$	200	400	600	800	1000	V
MAXIMUM RMS VOLTAGE	$V_{RMS}$	140	280	420	560	700	V
MAXIMUM DC BLOCKING VOLTAGE	$V_{DC}$	200	400	600	800	1000	V
MAXIMUM AVERAGE FORWARD RECTIFIED CURRENT 0.375" (9.5mm) LEAD LENGTH AT $T_A = -55^\circ\text{C}$	$I_O$	1.5					A
PEAK FORWARD SURGE CURRENT, 8.3ms SINGLE HALF SINE-WAVE SUPERIMPOSED ON RATED LOAD	$I_{FSM}$	60					A
TYPICAL JUNCTION CAPACITANCE (NOTE 1)	$C_J$	10					PF
TYPICAL THERMAL RESISTANCE (NOTE 2)	$R_{\theta ja}$	40					$^\circ\text{C/W}$
STORAGE TEMPERATURE RANGE	$T_{STG}$	- 55 TO + 150					$^\circ\text{C}$
OPERATING TEMPERATURE RANGE	$T_{OP}$	- 55 TO + 150					$^\circ\text{C}$


#### ELECTRICAL CHARACTERISTICS ( $A_T T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)

CHARACTERISTICS	SYMBOL	BYV95AP	BYV95BP	BYV95CP	BYV96DP	BYV96EP	UNITS
MAXIMUM FORWARD VOLTAGE AT $I_O$ DC	$V_F$	1.6					V
MAXIMUM REVERSE CURRENT AT 25°C	$I_R$	5					$\mu\text{A}$
MAXIMUM REVERSE CURRENT AT 100°C	$I_R$	50					$\mu\text{A}$
MAXIMUM REVERSE RECOVERY TIME (NOTE 3)	$T_{RR}$	150		250	300		nS

- NOTE:
1. MEASURED AT 1 MHZ AND APPLIED REVERSE VOLTAGE OF 4.0 VOLTS
  2. BOTH LEADS ATTACHED TO HEAT SINK 20x20x1t(mm) COPPER PLATE AT LEAD LENGTH 5mm
  3. REVERSE RECOVERY TEST CONDITIONS:  $I_F = 0.5\text{A}$ ,  $I_R = 1.0\text{A}$ ,  $I_{RR} = 0.25\text{A}$

# RATINGS AND CHARACTERISTIC CURVE BYV95AP THRU BYV96EP

FIG. 1-TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

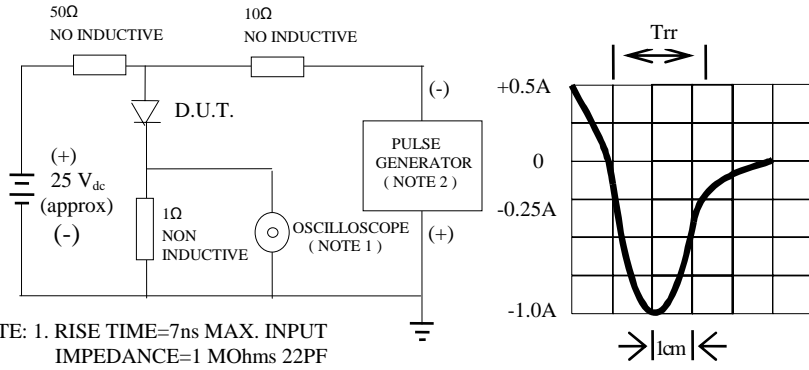

NOTE: 1. RISE TIME=7ns MAX. INPUT IMPEDANCE=1 MOhms 22PF  
2. RISE TIME =10ns MAX. SOURCE IMPEDANCE=50 OHMS

SET TIME BASE FOR 10/20 ns/cm

Fig. 2-MAXIMUM CURRENT DERATING CURVE

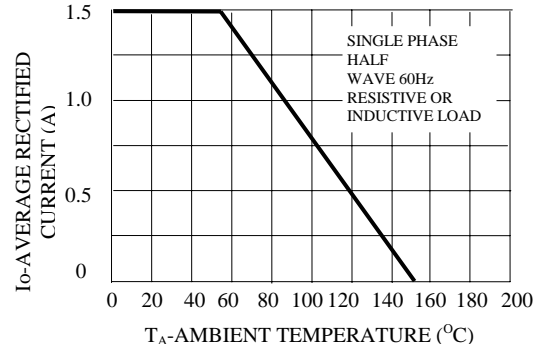


FIG. 3-TYPICAL REVERSE CHARACTERISTICS

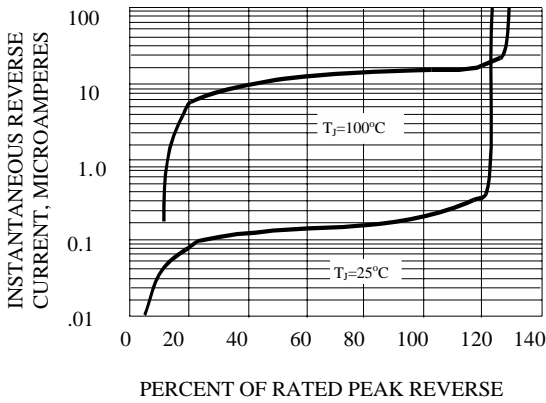


Fig. 4-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

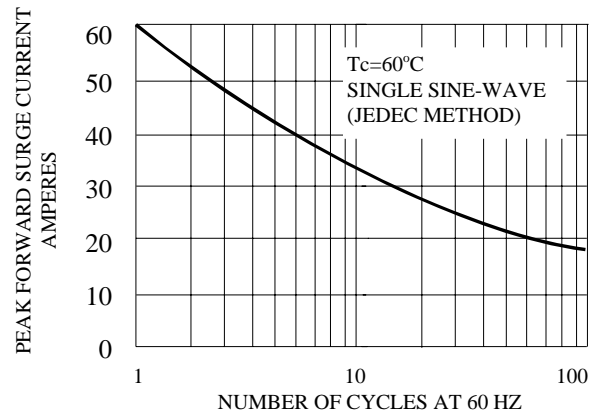


FIG. 5-TYPICAL JUNCTION CAPACITANCE

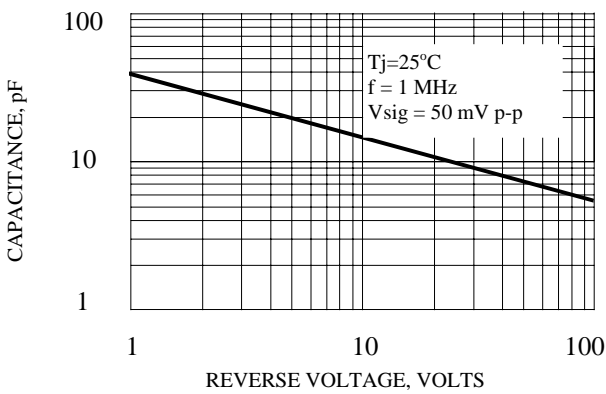


FIG. 6-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

