


**Models 72925**  
**Do-it-yourself 2mm Stackable Safety Sheathed Plug**

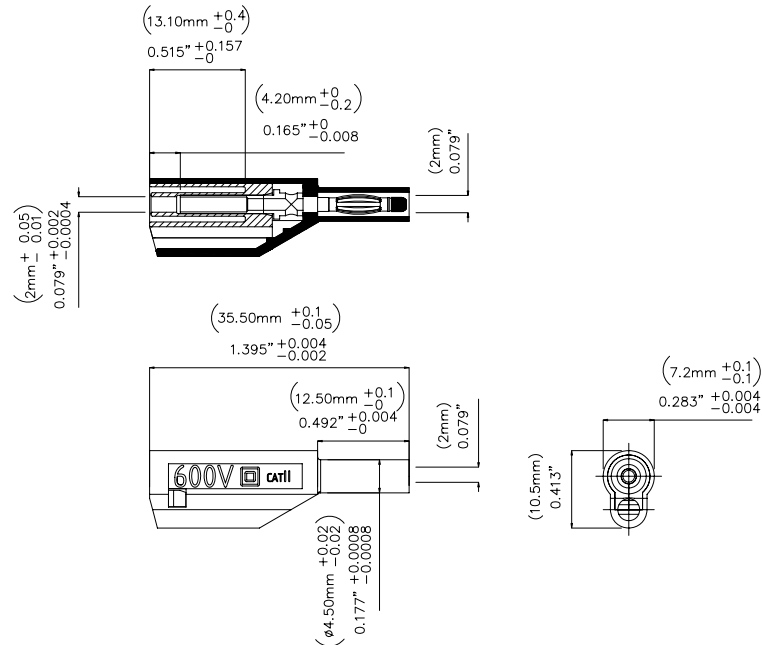

**Features**

- Build your own 2mm stackable Test Leads
- Plug spring is Beryllium copper for long insertion life
- Safety Rating 600 V CAT II when plug is correctly assembled and terminated.

**Materials**

- Plastic body: Polypropylene
- Plug body: Nickel plated brass
- Spring: Nickel plated Beryllium copper
- Spring tip: Polysulfone

**Ordering Information**

Model 72925-Color 10 per package  
Colors: -0 (Black) and -2 (Red)

**Specifications**

Current	Max. 10A
Voltage	600 V CAT II
Max Resistance	Less than 5 mΩ

**USA:** Sales: 800-490-2361 Technical Support: 800-241-2060 Fax: 888-403-3360

**Europe:** 31-(0) 40 2675 150 **International:** 425-446-5500

e-mail: [technicalsupport@pomonatest.com](mailto:technicalsupport@pomonatest.com)

Where to Buy: [www.pomonaelectronics.com](http://www.pomonaelectronics.com)

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.