
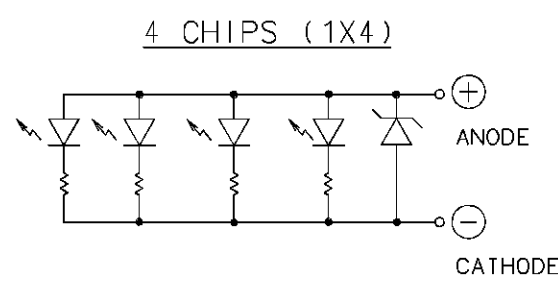
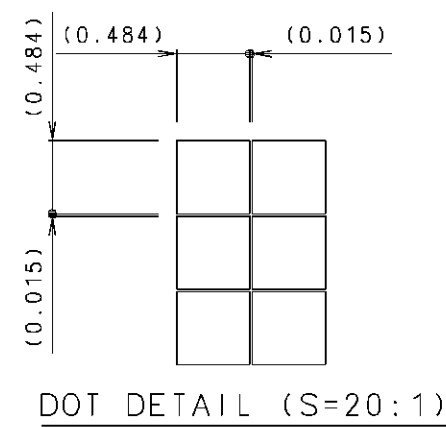


VIEWING DIRECTION

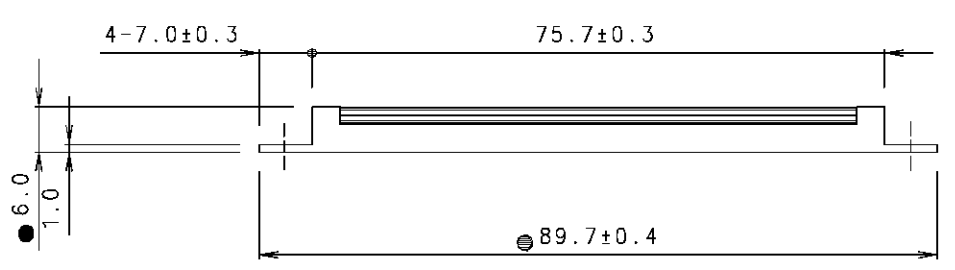

CN2 PIN ASSIGNMENT

| No. | SYMBOL |
|-----|----------------|
| 1 | LED A |
| 2 | LED K(CATHODE) |

CN1 PIN ASSIGNMENT

| No. | SYMBOL | No. | SYMBOL | No. | SYMBOL |
|-----|--------|-----|--------|-----|--------|
| 1 | /CS1 | 11 | D5 | 21 | C2- |
| 2 | /RES | 12 | D6 | 22 | V1 |
| 3 | A0 | 13 | D7 | 23 | V2 |
| 4 | /WR | 14 | VDD | 24 | V3 |
| 5 | /RD | 15 | VSS | 25 | V4 |
| 6 | D0 | 16 | VOUT | 26 | V0 |
| 7 | D1 | 17 | C3+ | 27 | VR |
| 8 | D2 | 18 | C1- | 28 | C86 |
| 9 | D3 | 19 | C1+ | 29 | P/S |
| 10 | D4 | 20 | C2+ | 30 | IRS |

TOLERANCE

| MEASURE | A | B | C |
|-----------|------|------|------|
| L≤16 | ±0.1 | ±0.3 | ±1 |
| 16<L≤63 | ±0.2 | ±0.5 | ±1.5 |
| 63<L≤250 | ±0.3 | ±0.8 | ±2 |
| 250<L≤500 | ±0.5 | ±1.2 | ±3 |
| 500<L | ±0.8 | ±2 | ±4 |
| ANGLE | ±1° | ±5° | ±10° |

NOTE

1. THE DIMENSION WITH THE MARK (●) ARE CONTROLLED AS A PARTICULAR CHARACTERISTIC.
2. [Hatched Area] SHOWS MAX AREA OF SILICONE RESIN.
3. VIEWING DIRECTION: DIRECTION THAT YOU CAN SEE THE DISPLAY MOST CLEARLY.
4. DISPLAY SKEW |a-b| ≤ 0.5
5. DO NOT USE MATERIALS WHICH ARE PROHIBITED BY ROHS.

MATERIAL: FINISH:

| | | | |
|-----------------------------|------------------------|-------------------------------|---------|
| DATE 2008/10/13 | THIRD ANGLE PROJECTION | OPTREX CORPORATION | |
| APPROVED Tokihito Sawada | SCALE UNIT 1:1 mm | | |
| CHECKED Masami Motohashi | DATE Oct,7'08 | DWG NO(CODE) F-55472AABASE | |
| DRAWN Shun Li | DSGN Shun Li | DWG SIZE A3 | DWG REV |