


# TX3-801HT

SMD TCXO  
HCMOS


QuartzCom  
the communications company



## Features

- Applications: mobile communications, instrumentation, microwave
- Frequency range up to 50 MHz
- Tight frequency stability vs. temperature
- Low phase noise


Parameter	Specification		
	TX3-801HTL	TX3-801HTM	TX3-801HTS
Frequency range	10 ~ 30 MHz		10 ~ 50 MHz
Standard frequencies	10.00, 13.00, 16.384, 19.20, 19.44, 20.00, 20.48 & 27.00 MHz		
Frequency stability:			
vs. temperature	≤ ±1.0 ~ ±2.5 ppm		
vs. supply & load change	≤ ±0.2 ppm	±5 %	
vs. aging	≤ ±1.0 ppm	1 <sup>st</sup> year	
Frequency tolerance ex. factory	≤ ±0.5 ppm		@ +25 °C
Supply voltage	3.0 V ±5 %	3.3 V ±5 %	5.0 V ±5 %
Supply current	4 ~ 15 mA		
Output signal	HCMOS		
Output load	15 pF		
Frequency adjustment	> ± 3 ppm	by internal trimmer	
Phase noise @ 13.0 MHz carrier frequency	-140 dBc/Hz	@ 1 kHz	
Operating temperature range	-30 ~ +75 °C	commercial application	
	-40 ~ +85 °C	industrial application	
Storage temperature range	-55 ~ +125 °C		
Packaging units	tape & reel	500 or 1'000 pieces	
Customer specifications on request			

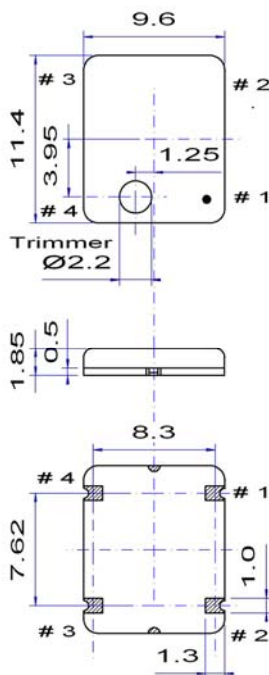

## Pin function


- # 1 not connected
- # 2 GND
- # 3 Output
- # 4 Vdc

## Example for solder pattern



*Do not design any conductive path between the pattern*

## Example for IR reflow soldering temperature

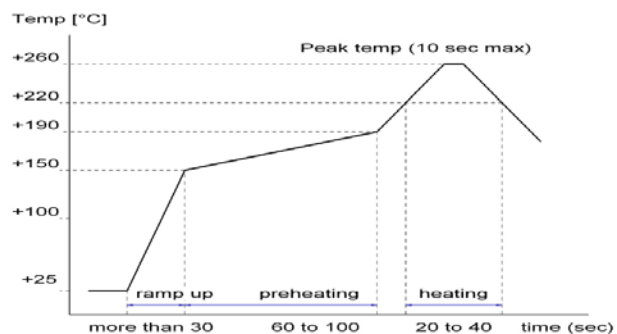

2002/95/EC RoHS compliant

30 Apr. 10