



FEATURES

- Automatically restarts microprocessor after power failure
- Maintains active-high reset for 350 ms after V_{CC} returns to an in-tolerance condition
- Accurate 5%, 10% or 15% microprocessor 5V power supply monitoring
- Reduces need for discrete components
- Precision temperature-compensated voltage reference and voltage sensor
- Low-cost TO-92 package or surface mount SOT-223 package
- Internal 5k pull-up resistor
- Operating temperature of -40°C to $+85^{\circ}\text{C}$

PIN ASSIGNMENT



TOP VIEW
SOT-23 PACKAGE
See Mech.
Drawings Section
On Website



BOTTOM VIEW
TO-92 PACKAGE
See Mech.
Drawings Section
On Website

PIN DESCRIPTION



| | |
|-------|-----------------------|
| PIN 1 | Ground |
| PIN 2 | Reset |
| PIN 3 | V_{CC} |
| PIN 4 | Ground (SOT-223 only) |

DESCRIPTION


The DS1833 EconoReset uses a precision temperature compensated reference and comparator circuit to monitor the status of the power supply (V_{CC}). When an out-of-tolerance condition is detected, an internal power fail signal is generated which forces reset to the active (high) state. When V_{CC} returns to an in-tolerance condition, the reset signal is kept in the active state for approximately 350 ms to allow the power supply and processor to stabilize.

OPERATION - POWER MONITOR


The DS1833 provides the functions of detecting out-of-tolerance power supply conditions and warning a processor-based system of impending power failure. When V_{CC} is detected as out-of-tolerance, as defined by the tolerance of the part selected, the RST signal is asserted. On power-up, RST is kept active for approximately 350 ms after the power supply has reached the selected tolerance. This allows the power supply and microprocessor to stabilize before RST is released.

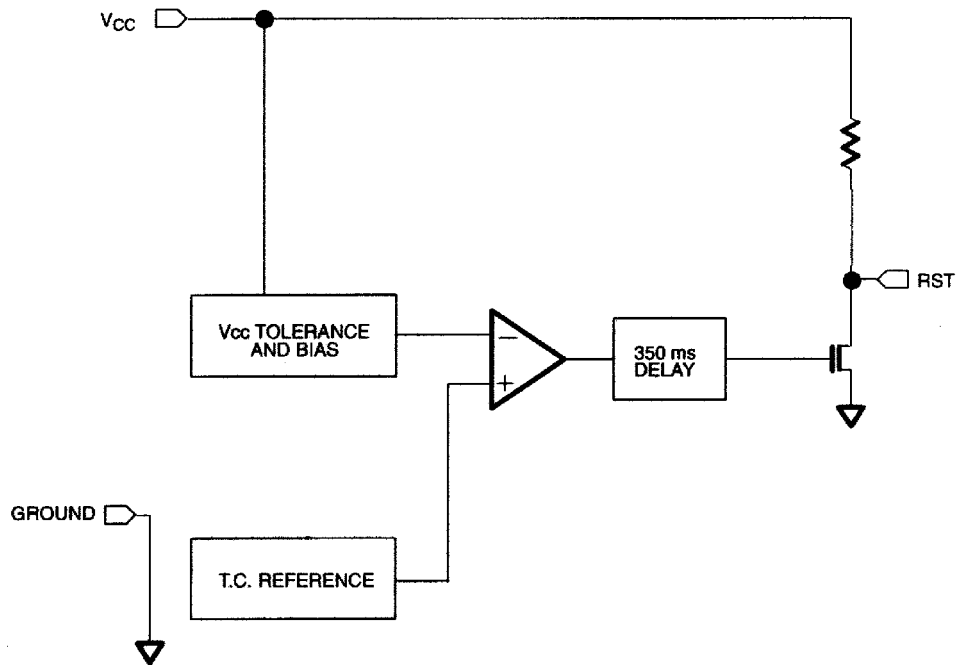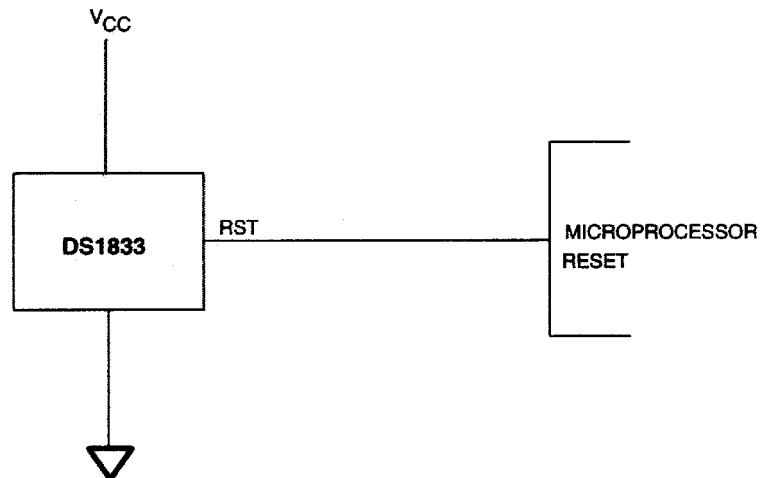BLOCK DIAGRAM Figure 1**APPLICATION EXAMPLE Figure 2**

POWER-UP Figure 3

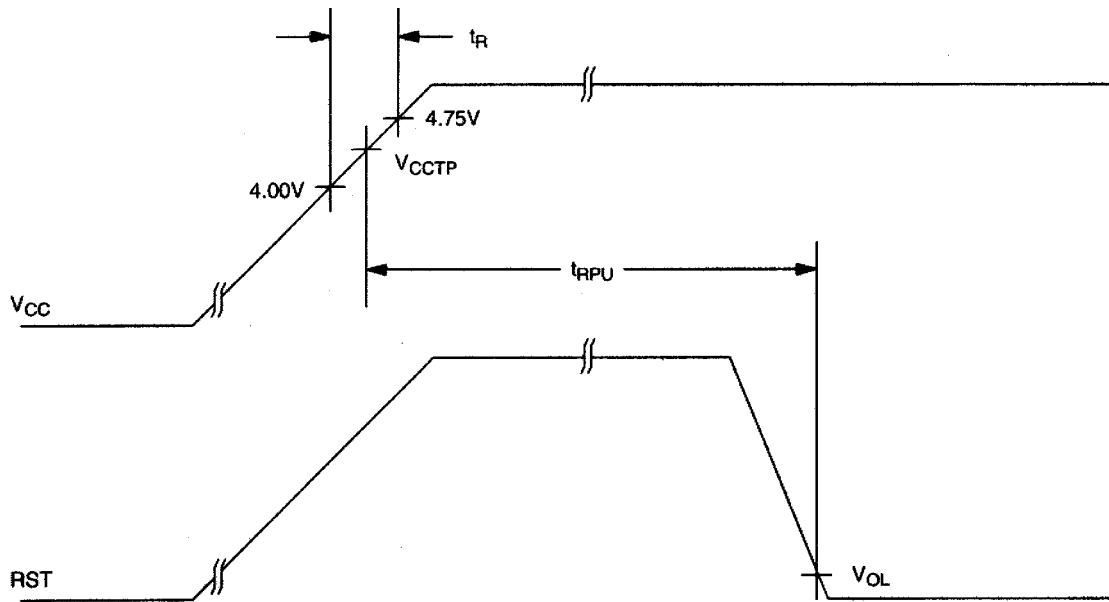

POWER-DOWN Figure 4

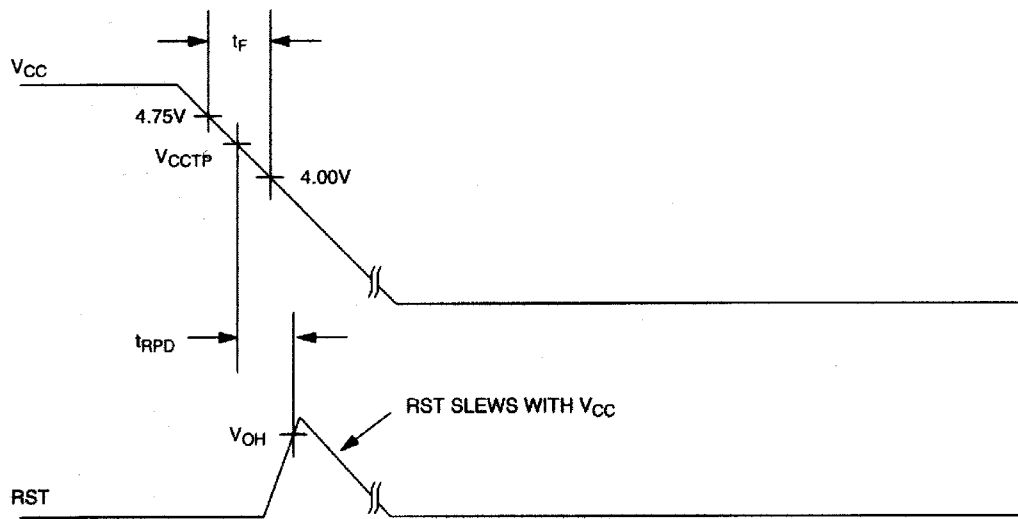

ABSOLUTE MAXIMUM RATINGS*

| | |
|--|--------------------------|
| Voltage on V_{CC} Pin Relative to Ground | -0.5V to +7.0V |
| Voltage on I/O Relative to Ground | -0.5V to $V_{CC} + 0.5V$ |
| Operating Temperature | -40°C to +85°C |
| Storage Temperature | -55°C to +125°C |
| Soldering Temperature | 260°C for 10 seconds |

* This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operation sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods of time may affect reliability.

RECOMMENDED DC OPERATING CONDITIONS (-40°C to +85°C)

| PARAMETER | SYMBOL | MIN | TYP | MAX | UNITS | NOTES |
|----------------|----------|-----|-----|-----|-------|-------|
| Supply Voltage | V_{CC} | 1.2 | 5.0 | 5.5 | V | 1 |

DC ELECTRICAL CHARACTERISTICS (-40°C to +85°C; $V_{DD} = 5V \pm 10\%$)

| PARAMETER | SYMBOL | MIN | TYP | MAX | UNITS | NOTES |
|---------------------------|-------------|------|-------|------|------------|-------|
| Low Level @ RST | V_{OL} | | | 0.4 | V | 1 |
| Output Current @ 0.4V | I_{OL} | +8 | | | mA | |
| Operating Current | I_{CC} | | 1.5 | 2 | mA | |
| V_{CC} Trip Point 5% | V_{CCTP1} | 4.5 | 4.625 | 4.74 | V | 1 |
| V_{CC} Trip Point 10% | V_{CCTP2} | 4.25 | 4.375 | 4.49 | V | 1 |
| V_{CC} Trip Point 15% | V_{CCTP3} | 4.0 | 4.125 | 4.24 | V | 1 |
| Output Capacitance | C_{OUT} | | | 10 | pF | |
| Internal Pull-Up Resistor | R_P | 3.75 | 5 | 6.25 | k Ω | |

AC ELECTRICAL CHARACTERISTICS (-40°C to +85°C; $V_{CC} = 5V \pm 10\%$)

| PARAMETER | SYMBOL | MIN | TYP | MAX | UNITS | NOTES |
|------------------------------------|-----------|-----|-----|-----|---------|-------|
| Reset Active Time | t_{RST} | 250 | 350 | 450 | ms | |
| V_{CC} Detect to RST | t_{RPD} | | | 100 | ns | |
| V_{CC} Slew Rate (4.75V - 4.00V) | t_F | 300 | | | μ s | |
| V_{CC} Slew Rate (4.00V - 4.75V) | t_R | 0 | | | ns | |
| V_{CC} Detect to RST | t_{RPU} | 250 | 350 | 450 | ms | |

NOTES:

1. All voltages are referenced to ground.

ECONORESET SELECTION GUIDE

| | | VCC TRIP POINT | | | PUSHBUTTON DETECT | | |
|-------------|------------|----------------|-------|------|-------------------|-----|-----|
| | | MIN | TYP | MAX | MIN | TYP | MAX |
| 5V | DS1233-15 | 4.0 | 4.125 | 4.24 | 2.4 | - | 3.3 |
| | DS1233-10 | 4.25 | 4.375 | 4.49 | 2.4 | - | 3.3 |
| | DS1233-5 | 4.5 | 4.625 | 4.75 | 2.4 | - | 3.3 |
| | DS1233D-15 | 4.0 | 4.125 | 4.24 | N/A | | N/A |
| | DS1233D-10 | 4.25 | 4.375 | 4.49 | N/A | | N/A |
| | DS1233D-5 | 4.5 | 4.625 | 4.75 | N/A | | N/A |
| | DS1833-15 | 4.0 | 4.125 | 4.24 | N/A | | N/A |
| | DS1833-10 | 4.25 | 4.375 | 4.49 | N/A | | N/A |
| | DS1833-5 | 4.5 | 4.625 | 4.75 | N/A | | N/A |
| 3.3V | DS1233A-15 | 2.64 | 2.72 | 2.80 | 1.8 | - | 3.0 |
| | DS1233A-10 | 2.8 | 2.88 | 2.97 | 1.8 | - | 3.0 |

[DS1833](#)

Part Number Table

Notes:

1. See the [DS1833 QuickView Data Sheet](#) for further information on this product family or download the [DS1833 full data sheet](#) (PDF, 128kB).
2. Other options and links for purchasing parts are listed at: <http://www.maxim-ic.com/sales>.
3. [Didn't Find What You Need?](#) Ask our applications engineers. Expert assistance in finding parts, usually within one business day.
4. Part number suffixes: T or T&R = tape and reel; + = RoHS/lead-free; # = RoHS/lead-exempt. More: See [full data sheet](#) or [Part Naming Conventions](#).
5. * Some packages have variations, listed on the drawing. "PkgCode/Variation" tells which variation the product uses.

| Part Number | Notes | Free Sample | Buy Direct | Package: TYPE PINS SIZE DRAWING CODE/VAR * | Temp | RoHS/Lead-Free? Materials Analysis |
|-------------|-------|-------------|------------|---|--------------|---|
| DS1833Z-15+ | | | | ST223;3 pin;137 Dwg: 56-G0005-001A (PDF) Use pkgcode/variation: K3+1* | -40C to +85C | RoHS/Lead-Free: Yes Materials Analysis |
| DS1833Z-5+ | | | | ST223;3 pin;137 Dwg: 56-G0005-001A (PDF) Use pkgcode/variation: K3+1* | -40C to +85C | RoHS/Lead-Free: Yes Materials Analysis |
| DS1833Z-10+ | | | | ST223;3 pin;137 Dwg: 56-G0005-001A (PDF) Use pkgcode/variation: K3+1* | -40C to +85C | RoHS/Lead-Free: Yes Materials Analysis |

| | | | |
|-----------------------|-----|---|--|
| DS1833Z-5+T&R | 5% | ST223;3 pin;137 Dwg: 56-G0005-001A (PDF) Use pkgcode/variation: K3+1* | -40C to +85C RoHS/Lead-Free: Yes Materials Analysis |
| DS1833Z-15+T&R | 15% | ST223;3 pin;137 Dwg: 56-G0005-001A (PDF) Use pkgcode/variation: K3+1* | -40C to +85C RoHS/Lead-Free: Yes Materials Analysis |
| DS1833Z-10+T&R | 10% | ST223;3 pin;137 Dwg: 56-G0005-001A (PDF) Use pkgcode/variation: K3+1* | -40C to +85C RoHS/Lead-Free: Yes Materials Analysis |
| DS1833Z-15 Monitor | 15% | ST223;3 pin;137 Dwg: 56-G0005-001A (PDF) Use pkgcode/variation: K3-1* | -40C to +85C RoHS/Lead-Free: No Materials Analysis |
| DS1833Z-10 Monitor | 10% | ST223;3 pin;137 Dwg: 56-G0005-001A (PDF) Use pkgcode/variation: K3-1* | -40C to +85C RoHS/Lead-Free: No Materials Analysis |
| DS1833Z-5 Monitor | 5% | ST223;3 pin;137 Dwg: 56-G0005-001A (PDF) Use pkgcode/variation: K3-1* | -40C to +85C RoHS/Lead-Free: No Materials Analysis |
| DS1833Z-15/T&R | 15% | ST223;3 pin;137 Dwg: 56-G0005-001A (PDF) Use pkgcode/variation: K3-1* | -40C to +85C RoHS/Lead-Free: No Materials Analysis |
| DS1833Z-10/T&R | 10% | ST223;3 pin;137 Dwg: 56-G0005-001A (PDF) Use pkgcode/variation: K3-1* | -40C to +85C RoHS/Lead-Free: No Materials Analysis |
| DS1833Z-5/T&R | 5% | ST223;3 pin;137 Dwg: 56-G0005-001A (PDF) Use pkgcode/variation: K3-1* | -40C to +85C RoHS/Lead-Free: No Materials Analysis |
| DS1833-15+ | | TO92;3 pin;185 Dwg: 56-G0006-001A (PDF) Use pkgcode/variation: Q3+1* | -40C to +85C RoHS/Lead-Free: Yes Materials Analysis |
| DS1833-10/T&R | 10% | TO92;3 pin;185 Dwg: 56-G0006-003A (PDF) Use pkgcode/variation: Q3-4* | -40C to +85C RoHS/Lead-Free: No Materials Analysis |

| | | | |
|---------------|----------------|--|---|
| DS1833-5 | 5% Monitor | TO92;3 pin;185 Dwg: 56-G0006-001A (PDF) Use pkgcode/variation: Q3-1* | -40C to +85C RoHS/Lead-Free: No Materials Analysis |
| DS1833-10 | 10% Monitor | TO92;3 pin;185 Dwg: 56-G0006-001A (PDF) Use pkgcode/variation: Q3-1* | -40C to +85C RoHS/Lead-Free: No Materials Analysis |
| DS1833-10+ | | TO92;3 pin;185 Dwg: 56-G0006-001A (PDF) Use pkgcode/variation: Q3+1* | -40C to +85C RoHS/Lead-Free: Yes Materials Analysis |
| DS1833-5+ | | TO92;3 pin;185 Dwg: 56-G0006-001A (PDF) Use pkgcode/variation: Q3+1* | -40C to +85C RoHS/Lead-Free: Yes Materials Analysis |
| DS1833-5+T&R | 5% | TO92;3 pin;185 Dwg: 56-G0006-003A (PDF) Use pkgcode/variation: Q3+4* | -40C to +85C RoHS/Lead-Free: Yes Materials Analysis |
| DS1833-15/T&R | 15% | TO92;3 pin;185 Dwg: 56-G0006-003A (PDF) Use pkgcode/variation: Q3-4* | -40C to +85C RoHS/Lead-Free: No Materials Analysis |
| DS1833-10+T&R | 10% | TO92;3 pin;185 Dwg: 56-G0006-003A (PDF) Use pkgcode/variation: Q3+4* | -40C to +85C RoHS/Lead-Free: Yes Materials Analysis |
| DS1833-15 | 15% Monitor | TO92;3 pin;185 Dwg: 56-G0006-001A (PDF) Use pkgcode/variation: Q3-1* | -40C to +85C RoHS/Lead-Free: No Materials Analysis |
| DS1833-5/T&R | 5% | TO92;3 pin;185 Dwg: 56-G0006-003A (PDF) Use pkgcode/variation: Q3-4* | -40C to +85C RoHS/Lead-Free: No Materials Analysis |
| DS1833-15+T&R | 15% | TO92;3 pin;185 Dwg: 56-G0006-003A (PDF) Use pkgcode/variation: Q3+4* | -40C to +85C RoHS/Lead-Free: Yes Materials Analysis |

[Didn't Find What You Need?](#)

[CONTACT US: SEND US AN EMAIL](#)

Copyright 2007 by Maxim Integrated Products, Dallas Semiconductor • [Legal Notices](#) • [Privacy Policy](#)