

WDD20U SERIES

DC - DC CONVERTER 20W SINGLE & DUAL OUTPUT



FEATURES

- EFFICIENCY UP TO 89%
- 2:1 WIDE INPUT RANGE
- I/O ISOLATION
- INPUT Pi FILTER
- SHORT CIRCUIT PROTECTION
- HIGH PERFORMANCE
- 2 YEARS WARRANTY



EN 60950-1

MODEL LIST

MODEL NO.	INPUT VOLTAGE	INPUT CURRENT (typ.)	(max.)	OUTPUT WATTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT	EFF. (min.)	EFF. (typ.)	CAPACITOR LOAD (max.)
-----------	---------------	----------------------	--------	----------------	----------------	----------------	-------------	-------------	-----------------------

Single Output Models

WDD20 - 03SIU	9~18 VDC	2.04 A	2.83 A	20 WATTS	+3.3 VDC	6000 mA	79%	81%	7000 µF
WDD20 - 05SIU	9~18 VDC	1.98 A	2.72 A	20 WATTS	+ 5 VDC	4000 mA	83%	85%	7000 µF
WDD20 - 12SIU	9~18 VDC	1.97 A	2.75 A	20 WATTS	+ 12 VDC	1670 mA	82%	84%	1000 µF
WDD20 - 15SIU	9~18 VDC	1.96 A	2.72 A	20 WATTS	+ 15 VDC	1330 mA	83%	85%	470 µF
WDD20 - 03S2U	18~36 VDC	1.0 A	1.4 A	20 WATTS	+3.3 VDC	6000 mA	80%	82%	7000 µF
WDD20 - 05S2U	18~36 VDC	0.97 A	1.4 A	20 WATTS	+ 5 VDC	4000 mA	84%	86%	7000 µF
WDD20 - 12S2U	18~36 VDC	0.96 A	1.32 A	20 WATTS	+ 12 VDC	1670 mA	86%	88%	1000 µF
WDD20 - 15S2U	18~36 VDC	0.95 A	1.32 A	20 WATTS	+ 15 VDC	1330 mA	87%	89%	470 µF
WDD20 - 03S3U	35~75 VDC	0.5 A	0.71 A	20 WATTS	+3.3 VDC	6000 mA	81%	83%	7000 µF
WDD20 - 05S3U	35~75 VDC	0.49 A	0.71 A	20 WATTS	+ 5 VDC	4000 mA	82%	84%	7000 µF
WDD20 - 12S3U	35~75 VDC	0.48 A	0.7 A	20 WATTS	+ 12 VDC	1670 mA	86%	88%	1000 µF
WDD20 - 15S3U	35~75 VDC	0.47 A	0.7 A	20 WATTS	+ 15 VDC	1330 mA	87%	89%	470 µF

Dual Output Models

WDD20 - 05DIU	9~18 VDC	2.0 A	2.75 A	20 WATTS	± 5 VDC	± 2000 mA	82%	84%	±1000 µF
WDD20 - 12DIU	9~18 VDC	1.93 A	2.72 A	20 WATTS	± 12 VDC	± 830 mA	83%	85%	± 470 µF
WDD20 - 15DIU	9~18 VDC	1.93 A	2.72 A	20 WATTS	± 15 VDC	± 670 mA	84%	86%	± 470 µF
WDD20 - 05D2U	18~36 VDC	0.98 A	1.4 A	20 WATTS	± 5 VDC	± 2000 mA	83%	85%	±1000 µF
WDD20 - 12D2U	18~36 VDC	0.96 A	1.32 A	20 WATTS	± 12 VDC	± 830 mA	86%	88%	± 470 µF
WDD20 - 15D2U	18~36 VDC	0.95 A	1.32 A	20 WATTS	± 15 VDC	± 670 mA	87%	89%	± 470 µF
WDD20 - 05D3U	35~75 VDC	0.49 A	0.7 A	20 WATTS	± 5 VDC	± 2000 mA	83%	85%	±1000 µF
WDD20 - 12D3U	35~75 VDC	0.48 A	0.7 A	20 WATTS	± 12 VDC	± 830 mA	86%	88%	± 470 µF
WDD20 - 15D3U	35~75 VDC	0.48 A	0.7 A	20 WATTS	± 15 VDC	± 670 mA	87%	89%	± 470 µF

SPECIFICATION

All Specifications Typical At Nominal Line, Full Load, 25°C Unless Otherwise Noticed

GENERAL

Characteristics	Conditions	min.	typ.	max.	unit
Switching frequency	Vi nom, Io nom		250		KHz
Isolation voltage	Input - Output	1500			VDC
Isolation resistance	Input - Output, @ 500VDC	100			MΩ
Isolation capacitance	100KHz / 1V			1000	pF
Ambient temperature	Vi nom, Io nom 3.3V & 5V output models	-40		+ 61	°C
	12V, 15V & dual output models	-40		+ 71	°C
Case temperature	Operating at Vi nom, Io nom			+100	°C
Derating	Vi nom		See derating curve		
Storage temperature	Non operational	-40		+100	°C
Relative humidity	Vi nom, Io nom	20		95	% RH
Temperature coefficient	Vi nom, Io min			± 0.02	% / °C
Dimension		L50.8 x W40.64 x H10.16			mm
MTBF	Bellcore issue 6@40°C, GB		958000		Hours
Cooling	Free air convection				

INPUT SPECIFICATIONS

Characteristics	Conditions	min.	typ.	max.	unit
Input voltage range	Ta min ... Ta max, Io nom	9	12	18	VDC
		18	24	36	VDC
		35	48	75	VDC
No load input current	Vi nom, Io = 0 12V models			25	mA
				20	mA
				15	mA
Input voltage w/o damage	Io nom 12V models			20	VDC
				40	VDC
				80	VDC
Startup voltage	Io nom 12V models		8.5		VDC
					VDC
				33	VDC
Input filter	Pi type				

OUTPUT SPECIFICATIONS

Characteristics	Conditions	min.	typ.	max.	unit
Output voltage accuracy	Vi nom, Io nom			± 2	%
Minimum load	Vi nom single output models	0			%
		10			%
Line regulation	Io nom, Vi min ... Vi max			± 1	%
Load regulation	Vi nom, Io 0 ... Io nom, single output models			± 2	%
	Vi nom, Io min ... Io nom, dual output models			± 5	%
Cross regulation (Dual model)	Aymmetrical load 10% - 100% FL			± 5	%
Startup time	Vi nom, Io nom			30	ms
Transient recovery time	Vi nom, I ~ 0.5 Io nom			500	μ s
Ripple & noise	Vi nom, Io nom, BW = 20MHz 3.3V & 5V models			100	mV
				150	mV
Voltage trim range (I)	Vi nom 3.3V model 5V, 12V, 15V & dual		± 5		%
			± 10		%
Efficiency	Vi nom, Io nom, Po / Pi	Up to 89%, See model list and efficiency curve			

NOTE 1 : Pls refer to Fig 1 & Table 1 for connection and resistance recommended.



SPECIFICATION

All Specifications Typical At Nominal Line, Full Load, 25°C Unless Otherwise Noticed

CONTROL AND PROTECTION

Remote ON / OFF	ON : opened or 8 ~ 10VDC applied, reference to input GND OFF : -0.3 ~ 2VDC applied, reference to input GND
Input reversed	Shunt diode built in, external fuse recommended (12Vin : 3A, 24Vin : 1.5A, 48Vin : 1A)
Output short circuit	Current limited (Auto-recovery)
Rated over load protection	110%min....140%max

APPROVALS AND STANDARD


UL/cUL	UL 60950-1 Recognized
TUV	EN 60950-1, CB scheme
CE	EN 61204-3, EN 55022, Class A, EN 61000-4-2, EN61000-4-3, EN61000-4-4, EN61000-4-6
Vibration	meet IEC 60068-2-6 (10-500 Hz, 2G, along X, Y, Z each Axis, 60 min for each Axis)

PHYSICAL CHARACTERISTICS

Case size	50.8 x 40.64 x 10.16 mm (2 x 1.6 x 0.4 inches)
Case material	Plastic base / Metal case
Weight	60 g
Packing material	Silicone

MECHANISM & PIN CONFIGURATION


mm [inch]

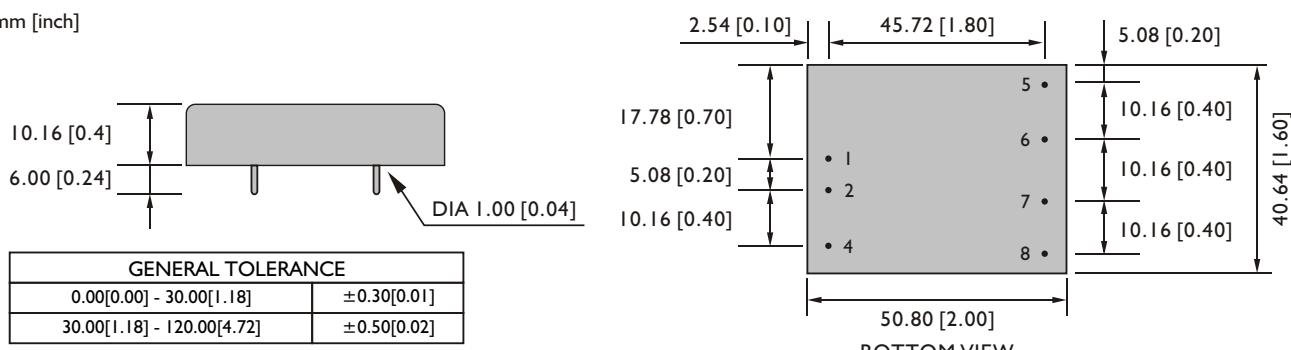**PIN ASSIGNMENT****GENERAL**


PIN NO.	1	2	4	5	6	7	8
SINGLE	Vi+	Vi-	ON / OFF	NO PIN	Vo +	Vo -	Trim
DUAL	Vi+	Vi-	ON / OFF	Vo +	com	Vo -	Trim

CIRCUIT SCHEMATIC


- Block diagram for WDD20U series with single output

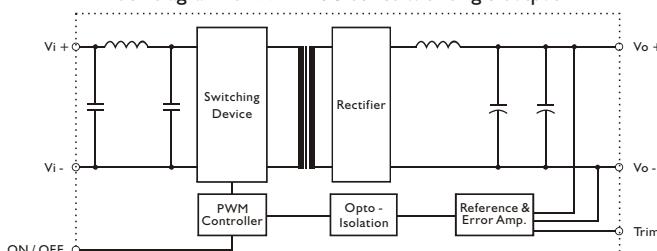


- Block diagram for WDD20U series with dual output

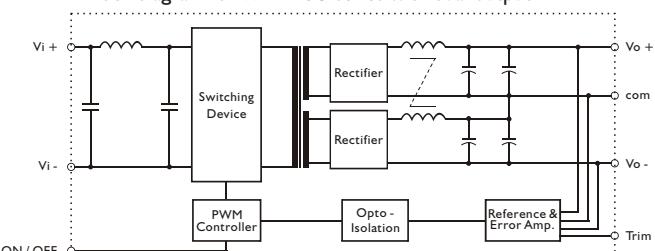**RECOMMENDED CIRCUIT**

- Recommended filter for EN55022 Class B compliance

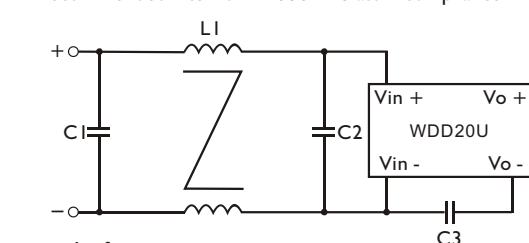www.chinfa.com

- Recommended EN 55022 Class B filter circuit layout.

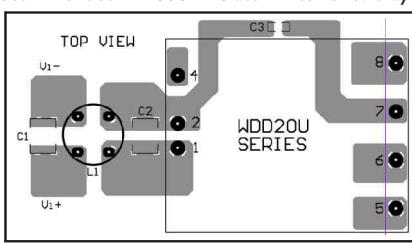
sales@chinfa.com

RECOMMENDED CIRCUIT

DERATING AND EFFICIENCY CURVE

- The components used in the above figure, together with the manufacturer part numbers for these components, are as follows.

	C1	C2	C3	L1
WDD20-XXXIU	3.3 μ F / 50V MLCC	3.3 μ F / 50V MLCC	1nF / 2KV MLCC	1.5mH Common Choke
WDD20-XXX2U	1 μ F / 50V MLCC	1 μ F / 50V MLCC	1nF / 2KV MLCC	1.5mH Common Choke
WDD20-XXX3U	3.3 μ F / 100V MLCC	3.3 μ F / 100V MLCC	1nF / 2KV MLCC	0.5mH Common Choke

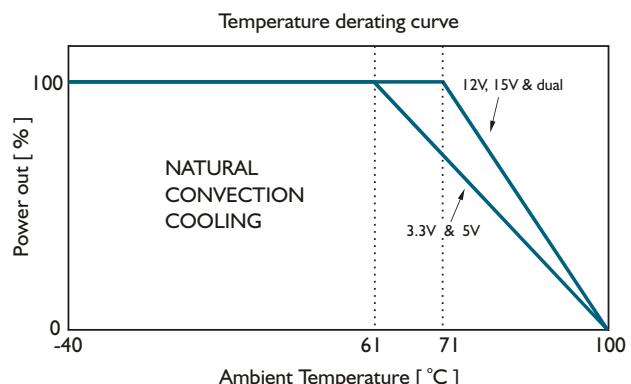

DERATING AND EFFICIENCY CURVE



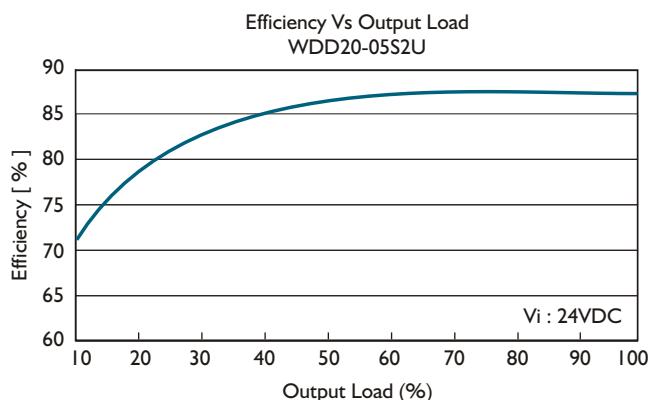


Fig. I Trim connection

(For Single output)

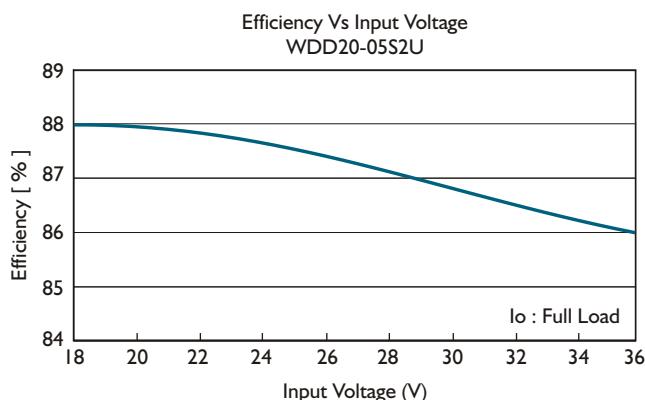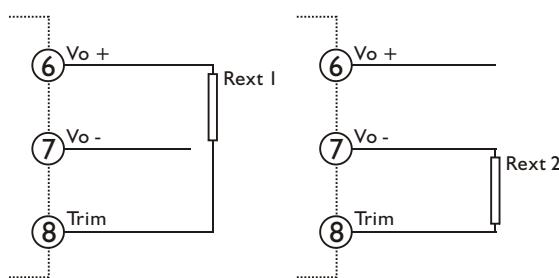

(For Dual output)

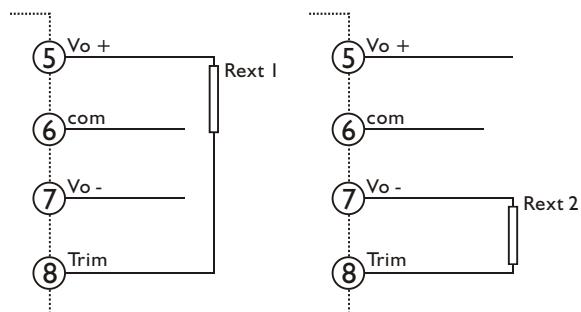


Table I Typical resistor values for various output voltage adjustment settings

Type	Rext 1		Rext 2	
	Vo nom -2.5%	Vo nom -5%	Vo nom +2.5%	Vo nom +5%
WDD20-03SXU	820 Ω	0 Ω	7.5K Ω	3K Ω
Type	Vo nom -5%	Vo nom -10%	Vo nom +5%	Vo nom +10%
WDD20-05SXU	3.9K Ω	0 Ω	4.7K Ω	0 Ω
WDD20-12SXU	130K Ω	18K Ω	10K Ω	1K Ω
WDD20-15SXU	130K Ω	20K Ω	20K Ω	3.9K Ω
WDD20-05DXU	33K Ω	12K Ω	10K Ω	3K Ω
WDD20-12DXU	120K Ω	56K Ω	12K Ω	2K Ω
WDD20-15DXU	180K Ω	75K Ω	10K Ω	1.2K Ω

WDD20U SERIES

DC - DC CONVERTER 20W SINGLE & DUAL OUTPUT



FEATURES

- EFFICIENCY UP TO 84%
- 4:1 WIDE INPUT RANGE
- I/O ISOLATION
- INPUT Pi FILTER
- SHORT CIRCUIT PROTECTION
- HIGH PERFORMANCE
- 2 YEARS WARRANTY



EN 60950-1

MODEL LIST

MODEL NO.	INPUT VOLTAGE	INPUT CURRENT (typ.)	(max.)	OUTPUT WATTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT	EFF. (min.)	EFF. (typ.)	CAPACITOR LOAD (max.)
-----------	---------------	----------------------	--------	----------------	----------------	----------------	-------------	-------------	-----------------------

Single Output Models

WDD20 - 03S4U	9~36 VDC	1.06 A	2.88 A	20 WATTS	+3.3 VDC	6000 mA	77%	79%	7000 μ F
WDD20 - 05S4U	9~36 VDC	1.06 A	2.88 A	20 WATTS	+ 5 VDC	4000 mA	78%	80%	3500 μ F
WDD20 - 12S4U	9~36 VDC	1.03 A	2.8 A	20 WATTS	+ 12 VDC	1670 mA	80%	82%	470 μ F
WDD20 - 15S4U	9~36 VDC	1.02 A	2.8 A	20 WATTS	+ 15 VDC	1330 mA	81%	83%	220 μ F
WDD20 - 03S5U	18~75 VDC	0.53 A	1.45 A	20 WATTS	+3.3 VDC	6000 mA	77%	79%	7000 μ F
WDD20 - 05S5U	18~75 VDC	0.51 A	1.45 A	20 WATTS	+ 5 VDC	4000 mA	79%	81%	3500 μ F
WDD20 - 12S5U	18~75 VDC	0.5 A	1.4 A	20 WATTS	+ 12 VDC	1670 mA	82%	84%	3500 μ F
WDD20 - 15S5U	18~75 VDC	0.5 A	1.4 A	20 WATTS	+ 15 VDC	1330 mA	82%	84%	1000 μ F

Dual Output Models

WDD20 - 05D4U	9~36 VDC	1.06 A	2.88 A	20 WATTS	\pm 5 VDC	\pm 2000 mA	78%	80%	\pm 1000 μ F
WDD20 - 12D4U	9~36 VDC	1.02 A	2.8 A	20 WATTS	\pm 12 VDC	\pm 830 mA	81%	83%	\pm 470 μ F
WDD20 - 15D4U	9~36 VDC	1.0 A	2.8 A	20 WATTS	\pm 15 VDC	\pm 670 mA	82%	84%	\pm 470 μ F
WDD20 - 05D5U	18~75 VDC	0.52 A	1.4 A	20 WATTS	\pm 5 VDC	\pm 2000 mA	80%	82%	\pm 1000 μ F
WDD20 - 12D5U	18~75 VDC	0.49 A	1.4 A	20 WATTS	\pm 12 VDC	\pm 830 mA	82%	84%	\pm 470 μ F
WDD20 - 15D5U	18~75 VDC	0.5 A	1.4 A	20 WATTS	\pm 15 VDC	\pm 670 mA	82%	84%	\pm 470 μ F

SPECIFICATION

All Specifications Typical At Nominal Line, Full Load, 25°C Unless Otherwise Noticed

GENERAL

Characteristics	Conditions	min.	typ.	max.	unit
Switching frequency	Vi nom, Io nom		250		KHz
Isolation voltage	Input - Output	1500			VDC
Isolation resistance	Input - Output, @ 500VDC	100			MΩ
Isolation capacitance	100KHz / 1V			1000	pF
Ambient temperature	Vi nom, Io nom 3.3V & 5V output models 12V, 15V & dual output models	-40 -40		+61 +71	°C
Case temperature	Operating at Vi nom, Io nom			+100	°C
Derating	Vi nom		See derating curve		
Storage temperature	Non operational	-40		+100	°C
Relative humidity	Vi nom, Io nom	20		95	% RH
Temperature coefficient	Vi nom, Io min			±0.02	% / °C
Dimension			L50.8 x W40.64 x H10.16		mm
MTBF	Bellcore issue 6@40°C, GB		960000		Hours
Cooling	Free air convection				

INPUT SPECIFICATIONS

Characteristics	Conditions	min.	typ.	max.	unit
Input voltage range	Ta min ... Ta max, Io nom	9 18	24 48	36 75	VDC
No load input current	Vi nom, Io=0 24V models 48V models			20 15	mA
Input voltage w/o damage	Io nom 24V models 48V models			40 80	VDC
Startup voltage	Io nom 24V models 48V models		8.5 16		VDC
Input filter	Pi type				

OUTPUT SPECIFICATIONS

Characteristics	Conditions	min.	typ.	max.	unit
Output voltage accuracy	Vi nom, Io nom			±2	%
Minimum load	Vi nom single output models dual output models (each output)	0 10			%
Line regulation	Io nom, Vi min ... Vi max			±1	%
Load regulation	Vi nom, Io 0 ... Io nom, single output models Vi nom, Io min ... Io nom, dual output models			±2 ±5	%
Cross regulation (Dual model)	Aymmetrical load 10% - 100% FL			±5	%
Startup time	Vi nom, Io nom			30	ms
Transient recovery time	Vi nom, I ~ 0.5 Io nom			500	μs
Ripple & noise	Vi nom, Io nom, BW = 20MHz 3.3V & 5V models 12V, 15V & dual			100 150	mV
Voltage trim range 1)	Vi nom 3.3V model 5V, 12V, 15V & dual		±5 ±10		%
Efficiency	Vi nom, Io nom, Po / Pi		Up to 84%, See model list and efficiency curve		

NOTE 1 : Pls refer to Fig 1 & Table 1 for connection and resistance recommended.

CONTROL AND PROTECTION

Remote ON / OFF	ON : opened or 8 ~ 10VDC applied, reference to input GND OFF : -0.3 ~ 2VDC applied, reference to input GND
Input reversed	Shunt diode built in, external fuse recommended (24Vin : 3A, 48Vin : 1.5A)
Output short circuit	Current limited (Auto-recovery)
Rated over load protection	110%min...140%max



SPECIFICATION

All Specifications Typical At Nominal Line, Full Load, 25°C Unless Otherwise Noticed

APPROVALS AND STANDARD


UL/cUL	UL 60950-1 Recognized
TUV	EN 60950-1, CB scheme
CE	EN 61204-3, EN 55022, Class A, EN 61000-4-2, EN61000-4-3, EN61000-4-4, EN61000-4-6
Vibration	meet IEC 60068-2-6 (10-500 Hz, 2G, along X, Y, Z each Axis, 60 min for each Axis)

PHYSICAL CHARACTERISTICS

Case size	50.8 x 40.64 x 10.16 mm (2 x 1.6 x 0.4 inches)
Case material	Plastic base / Metal case
Weight	60 g
Packing material	Silicone

MECHANISM & PIN CONFIGURATION


mm [inch]

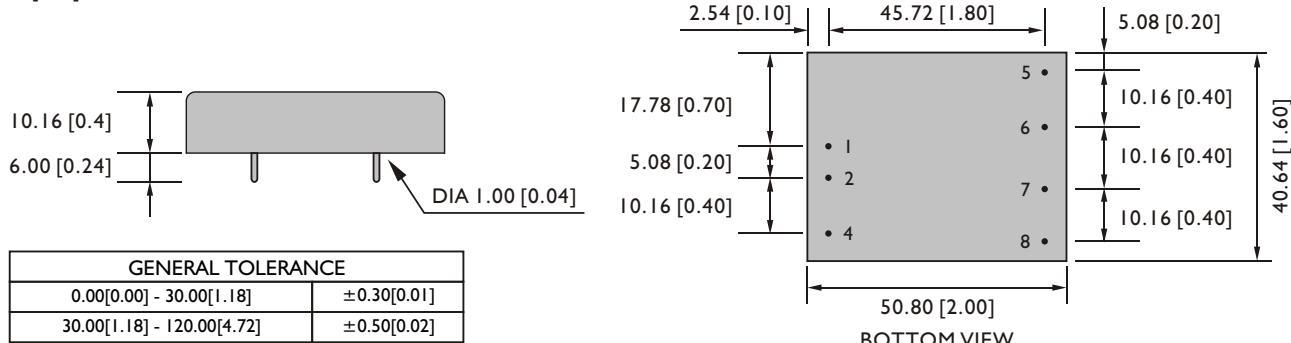**PIN ASSIGNMENT****GENERAL**


PIN NO.	1	2	4	5	6	7	8
SINGLE	Vi+	Vi-	ON / OFF	NO PIN	Vo +	Vo -	Trim
DUAL	Vi+	Vi-	ON / OFF	Vo +	com	Vo -	Trim

CIRCUIT SCHEMATIC


- Block diagram for WDD20U series with single output

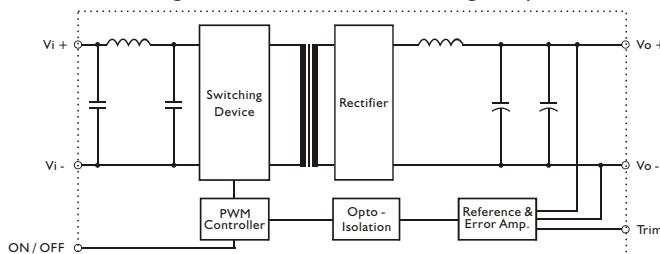


- Block diagram for WDD20U series with dual output

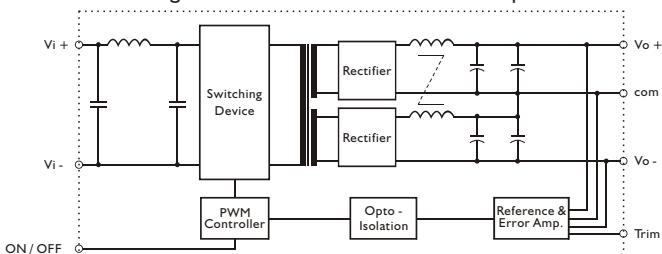**RECOMMENDED CIRCUIT**

- Recommended filter for EN55022 Class B compliance

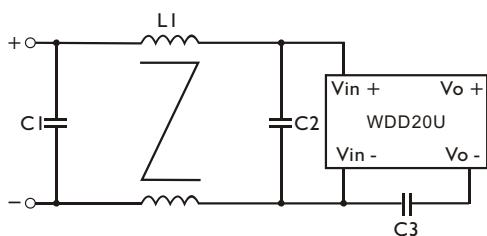

- Recommended EN 55022 Class B filter circuit layout.

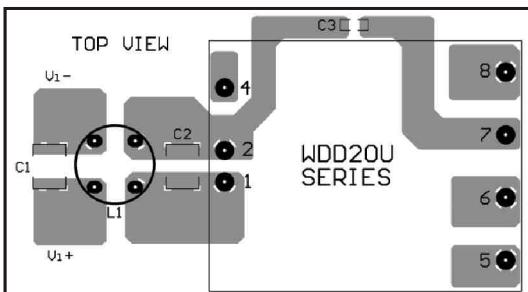


RECOMMENDED CIRCUIT

DERATING AND EFFICIENCY CURVE

- The components used in the above figure, together with the manufacturer part numbers for these components, are as follows.

	C1	C2	C3	L1
WDD20-XXX4U	1 μ F / 50V MLCC	1 μ F / 50V MLCC	1nF / 2KV MLCC	1.5mH Common Choke
WDD20-XXX5U	3.3 μ F / 100V MLCC	3.3 μ F / 100V MLCC	1nF / 2KV MLCC	0.5mH Common Choke

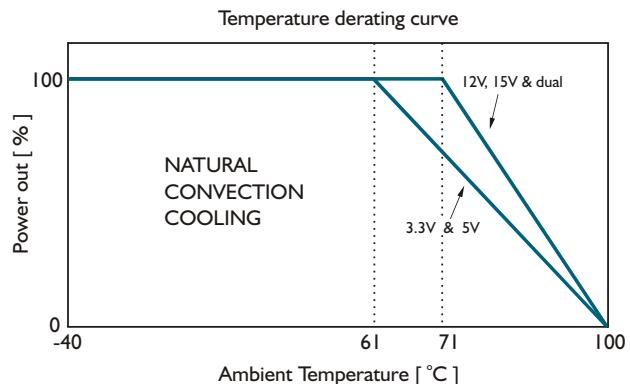

DERATING AND EFFICIENCY CURVE



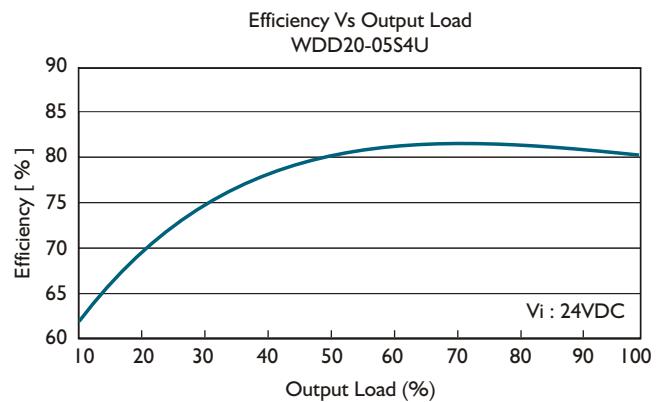


Fig. I Trim connection

(For Single output)

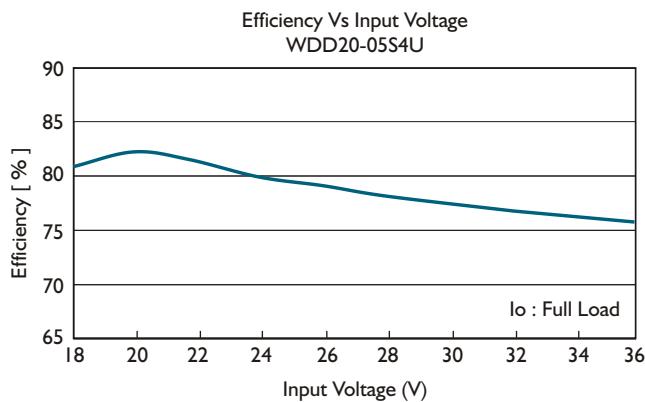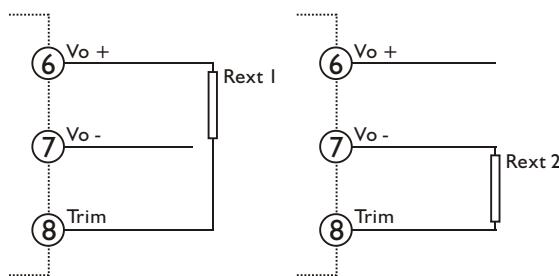

(For Dual output)

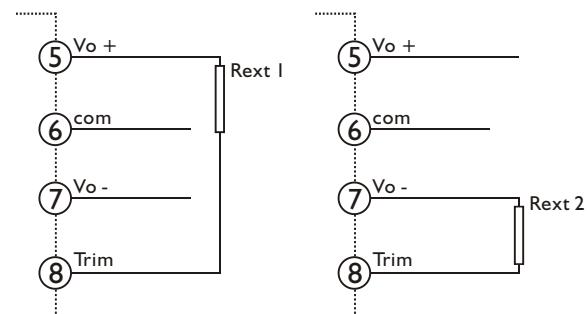


Table I Typical resistor values for various output voltage adjustment settings

Type	Rext 1		Rext 2	
	Vo nom -2.5%	Vo nom -5%	Vo nom +2.5%	Vo nom +5%
WDD20-03SXU	820 Ω	0 Ω	7.5K Ω	3K Ω
Type	Vo nom -5%	Vo nom -10%	Vo nom +5%	Vo nom +10%
WDD20-05SXU	3.9K Ω	0 Ω	4.7K Ω	0 Ω
WDD20-12SXU	130K Ω	18K Ω	10K Ω	1K Ω
WDD20-15SXU	130K Ω	20K Ω	20K Ω	3.9K Ω
WDD20-05DXU	33K Ω	12K Ω	10K Ω	3K Ω
WDD20-12DXU	120K Ω	56K Ω	12K Ω	2K Ω
WDD20-15DXU	180K Ω	75K Ω	10K Ω	1.2K Ω