


# SD

KO-59-02

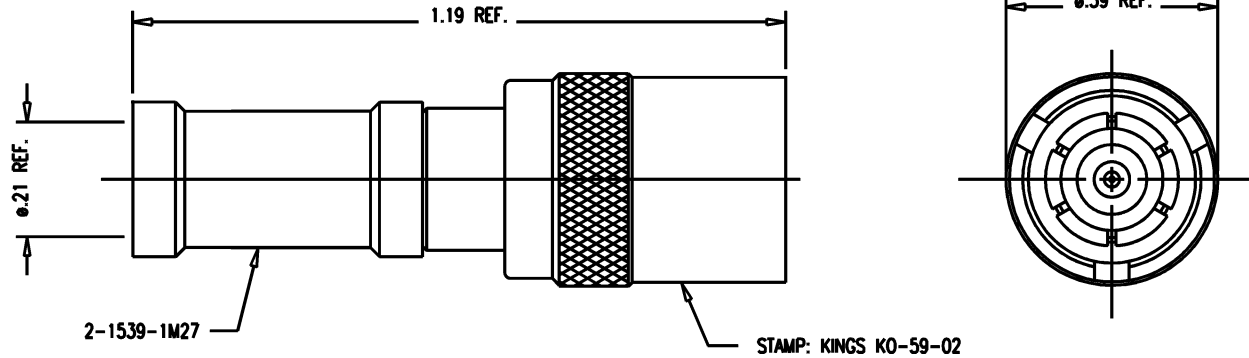

**NOTES:**

1. FOR USE WITH RG-58, 58A, 58C & 141/U CABLES.
2. FOR CABLING TRIMMING USE KTJ-75 & KTD-110.
3. FOR CRIMPING USE DIE SIZE 86.
4. FOR CABLING INSTRUCTIONS SEE CP-429.
5. MARK PACKAGE: KINGS KO-59-02, YRWK(DATE CODE)
6. MATERIALS:  
 GASKET: SILICONE RUBBER, ZZ-R-765  
 INSULATOR: TEFLON, ASTM-D-4894  
 SPRING: STAINLESS STEEL WIRE  
 OUTER CONTACT: BERYLLIUM COPPER, ASTM-B-196  
 ALL OTHER PARTS: BRASS, ASTM-B16
7. FINISHES:  
 CENTER CONTACT: GOLD PLATE PER, MIL-G-45204  
 ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT FINISH (TR-5)
8. ELECTRICAL CHARACTERISTICS:  
 NOMINAL IMPEDANCE: 50 OHM.  
 FREQUENCY RANGE: DC TO 10 GHz  
 WORKING VOLTAGE: 500 VOLTS RMS

**REVISIONS**

ISSUE	CHANGES
5	CN 37546 C REDRAWN JW 03/12/98

K05902S

SCALE 4:1

APPROX SURFACE AREA

USED ON

REF: BOEING

PLUG, TPS

DRAWN	HFE	DATE	06/21/68
-------	-----	------	----------

DESIGN	PETE	DATE	06/26/68
--------	------	------	----------

APPR.		DATE	
-------	--	------	--

**KINGS**  
ELECTRONICS CO., INC.  
TUCKAHOE, NEW YORK 10707

KO-59-02

# SD