


## Schottky Barrier Rectifier

 Reverse Voltage 20 to 60V  
 Forward Current 3.0A

DO-204AC (DO-15)

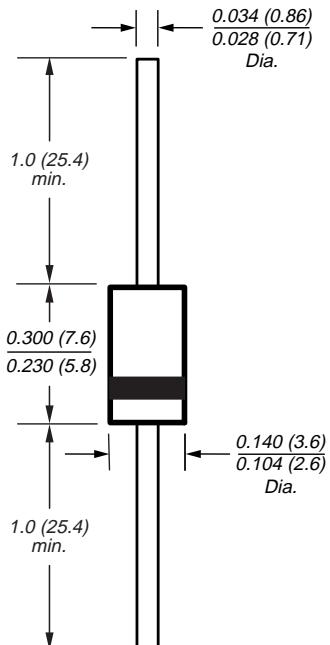

Dimensions in inches and (millimeters)

### Features

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Low power loss, high efficiency
- For use in low voltage high frequency inverters, free wheeling, and polarity protection applications
- Guardring for overvoltage protection
- 3 Amp Schottky rectifier in smaller DO-204AC (DO-15) package

### Mechanical Data

**Case:** JEDEC DO-204AC molded plastic body

**Terminals:** Plated axial leads, solderable per MIL-STD-750, Method 2026

 High temperature soldering guaranteed:  
 250°C/10 seconds 0.375" (9.5mm) lead length,  
 5lbs. (2.3kg) tension

**Polarity:** Color band denotes cathode end

**Mounting Position:** Any

**Weight:** 0.04oz., 1.12g

### Maximum Ratings and Thermal Characteristics (TA = 25°C unless otherwise noted)

Parameter	Symbol	SB320S	SB330S	SB340S	SB350S	SB360S	Unit
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	20	30	40	50	60	V
Maximum RMS voltage	V <sub>RMS</sub>	14	21	28	35	42	V
Maximum DC blocking voltage	V <sub>DC</sub>	20	30	40	50	60	V
Maximum average forward rectified current at 0.375 (9.5mm) lead length (See Fig.1)	I <sub>F(AV)</sub>			3.0			A
Peak forward surge current 8.3μs single half sine-wave superimposed on rated load (JEDEC Method)	I <sub>FSM</sub>			100			A
Typical thermal resistance <sup>(2)</sup>	R <sub>θJA</sub> R <sub>θJL</sub>			40			°C/W
Operating junction temperature range	T <sub>J</sub>	−65 to +125		−65 to +150			°C
Storage temperature range	T <sub>TSG</sub>	−65 to +150					°C

### Electrical Characteristics (TA = 25°C unless otherwise noted)

Parameter	Symbol	SB320S	SB330S	SB340S	SB350S	SB360S	Unit		
Maximum instantaneous forward voltage at 3.0A <sup>(1)</sup>	V <sub>F</sub>	0.50		0.74			V		
Maximum instantaneous reverse current at rated DC blocking voltage <sup>(1)</sup>	I <sub>R</sub>	TA = 25°C TA = 100°C	0.5			10	mA		
			20						

Notes: (1) Pulse test: 300μs pulse width, 1% duty cycle

(2) Thermal resistance from junction to lead vertical P.C.B. mounting, 0.500" (12.7mm) lead length with 2.5 x 2.5" (63.5 x 63.5mm) copper pad


# SB320S thru SB360S




Vishay Semiconductors  
formerly General Semiconductor

## Ratings and Characteristic Curves ( $T_A = 25^\circ\text{C}$ unless otherwise noted)


**Fig. 1 - Forward Current Derating Curve**

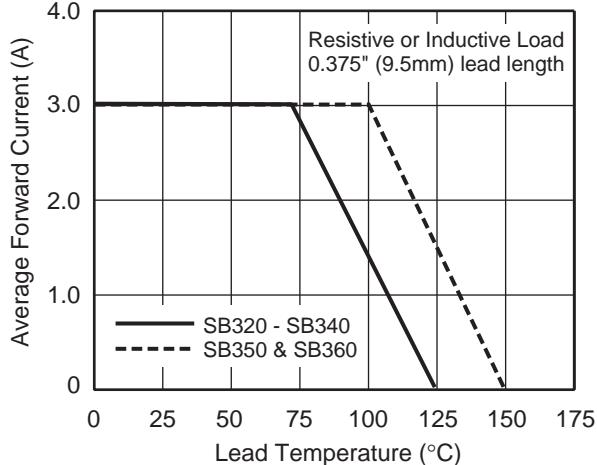


**Fig. 2 - Maximum Non-repetitive Peak Forward Surge Current**

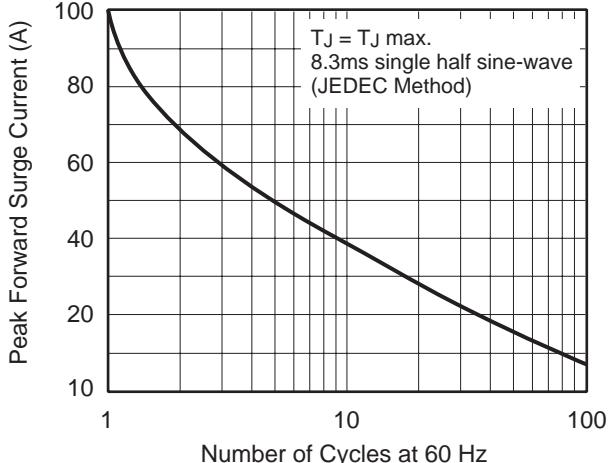


**Fig. 3 - Typical Instantaneous Forward Characteristics**

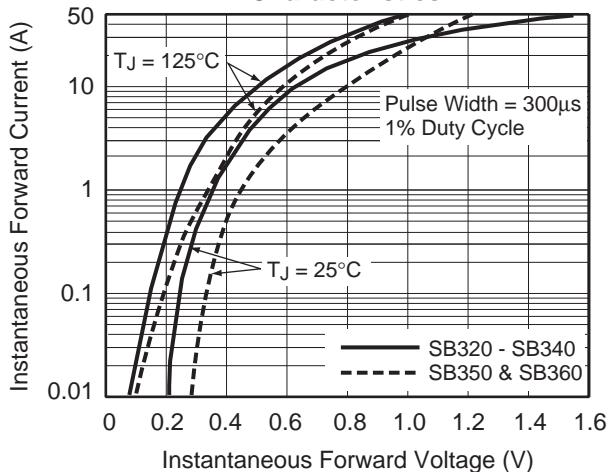

**Fig. 4 - Typical Reverse Characteristics**

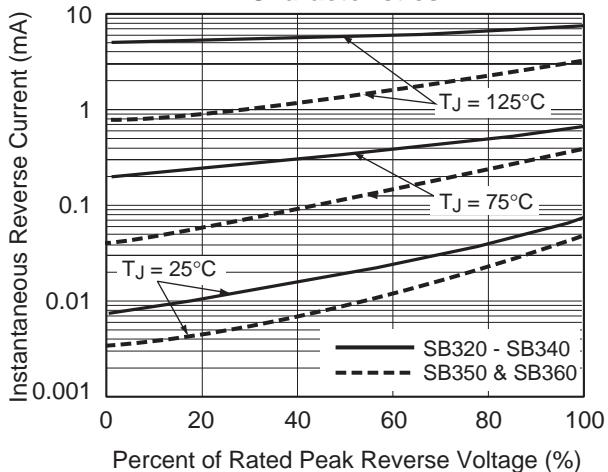

**Fig. 5 - Typical Junction Capacitance**

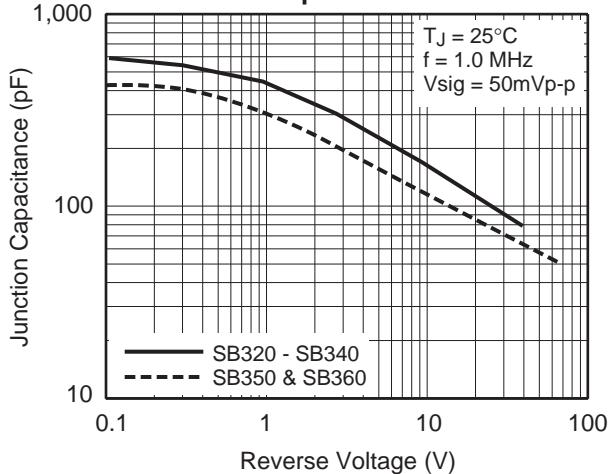

**Fig. 6 - Typical Transient Thermal Impedance**

