

6

5




4

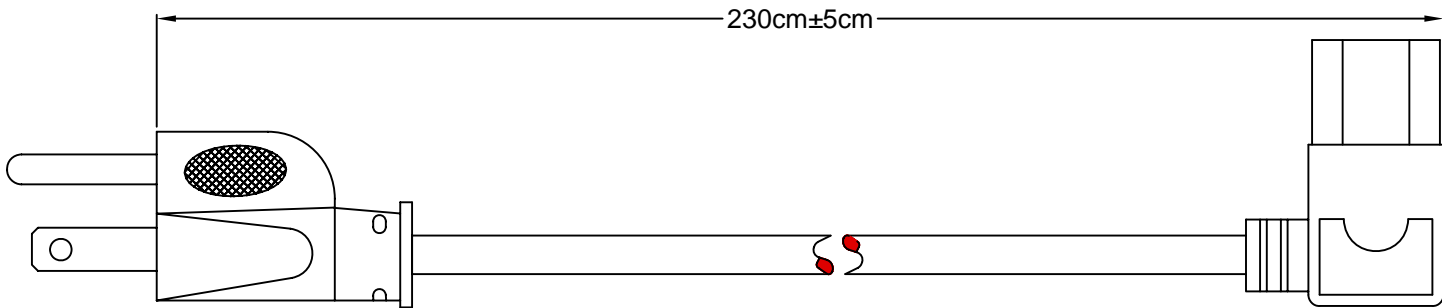

3




2




1

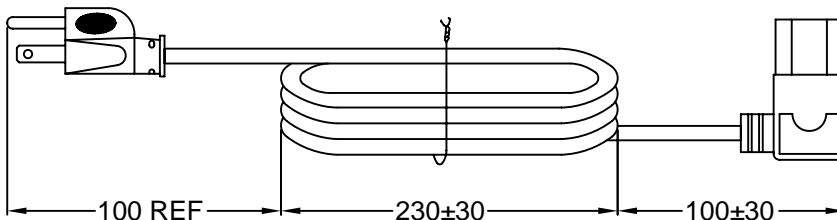
CABLE SPECIFICATIONS

DESCRIPTION	COLOR CODE	NOMINAL O.D.	OVERALL RATING	COLOR	APPROVAL
18/3 SVT 105°C, VW-1	NORTH AMERICAN	6.3	10A 125V	BLACK	  OR 



NEMA 5-15P
  OR 

LEFT HANDED IEC 60320
 C13
  OR 



HANKING DETAIL

RoHS
 COMPLIANT

REV	DATE	CHANGE	CHNG		CHKD		APPR	
			PB	TD	PB	TD	PB	TD
A	12/18/96	UPDATED DRAWING						JJ
B	3/6/01	ADD HANKING; 105°C						
C	12/12/01	REVISED / UPDATED						

TOLERANCE IN MM UNLESS OTHERWISE SPECIFIED	
> 1000	± 50
≤ 1000	± 30
STRIPPED LENGTH ± 2	
DRAWN BY: AH	DATE: 1/10/94
CHECK BY: LFH	DATE: 12/10/94
APPR BY: SS	DATE: 12/10/94

Power Dynamics, Inc.
 Phone: 973-560-0019 Whippany, New Jersey Fax: 973-560-0076

PART: AMERICAN CORD SET; 230cm LONG
 NEMA 5-15P TO IEC 60320 C13, LEFT HANDED

10086

SIZE: A
 SCALE: NTS

ALL DIMENSIONS FOR REFERENCE ONLY
 DIMENSIONS ARE IN MILLIMETERS

SHEET 1 of 1
 REV: B

6

5

4

3

2

1