

**COMMON MODE CHOKE**  
**S570-1328-00**



TM0046

Bel provides a self leaded, surface mount, low current, common mode choke.

**SCHEMATIC**




**MECHANICALS**

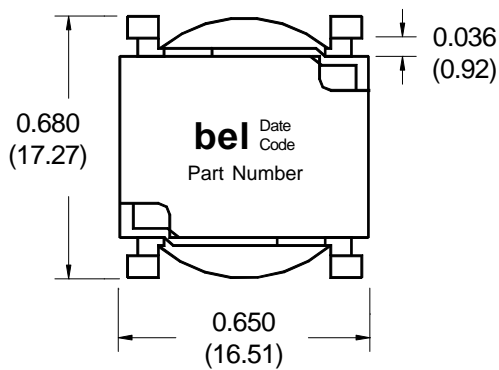

All dimensions are in inches(mm).  
Dimension Tolerance is +/- 0.02(0.51) unless otherwise specified.

**SUGGESTED PAD LAYOUT**

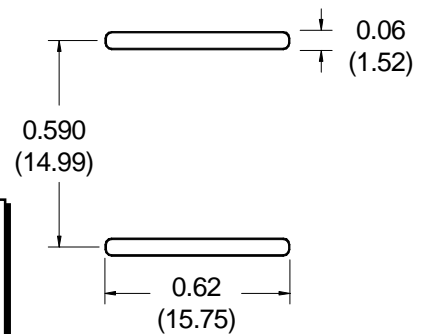

**ELECTRICALS @ 25° C**

Part Number	Primary Inductance OCL(μH) +/- 10%	Peak Current (DC Amps) Max	Switching Frequency (KHz)	DCR (Ω) Max
S570-1328-00	50	1.5	300	0.15

Primary Inductance is 40μH typical at peak current.

**Corporate Office**

**Bel Fuse Inc.**  
198 Van Vorst Street, Jersey City, NJ 07302-4496  
Tel: 201-432-0463  
Fax: 201-432-9542  
E-Mail: BelFuse@belfuse.com  
Internet: <http://www.belfuse.com>

**Far East Office**

**Bel Fuse Ltd.**  
8F/8 Luk Hop Street  
San Po Kong  
Kowloon, Hong Kong  
Tel: 852-2328-5515  
Fax: 852-2352-3706

**European Office**

**Bel Fuse Europe Ltd.**  
Preston Technology Management Centre  
Marsh Lane, Preston PR1 8UD  
Lancashire, U.K.  
Tel: 44-1772-556601  
Fax: 44-1772-888366