

# L78M00 Series



3028

Monolithic Linear IC

## 5 to 24V 0.5A 3-Pin Voltage Regulator

©929C

**Use**

- General-purpose voltage regulator

**Features**

- Output voltage
 

L78M05: 5V	L78M06: 6V	L78M07: 7V	L78M08: 8V
L78M09: 9V	L78M10: 10V	L78M12: 12V	L78M15: 15V
L78M18: 18V	L78M20: 20V	L78M24: 24V	
- Available output: 500mA
- On-chip thermal protector
- On-chip overcurrent limiter
- On-chip ASO protector
- JEDEC TO-220AB package facilitating easy mounting and thermal design as in case of transistor

**[Common to L78M00 series]**

**Maximum Ratings at Ta=25°C**

				unit
Maximum Supply Voltage	V <sub>CC</sub> max	Pin 1	35	V
Allowable Power Dissipation	Pd max		1.75	W
Operating Temperature	Topg		-20 to +80	°C
Storage Temperature	Tstg		-40 to +150	°C

**[L78M05]**


**Recommended Operating Conditions at Ta=25°C**

			unit
Input Voltage	V <sub>IN</sub>	7.5 to 20	V
Output Current	I <sub>OUT</sub>	5 to 500	mA


**Operating Characteristics at Ta=25°C, V<sub>IN</sub>=10V, I<sub>OUT</sub>=350mA, See specified**

			min	typ	max	unit
Output Voltage	V <sub>OUT</sub>	Tj=25°C	4.8	5.0	5.2	V
Line Regulation	ΔV <sub>oline</sub>	Tj=25°C, 7V ≤ V <sub>IN</sub> ≤ 25V, I <sub>OUT</sub> =200mA	3.0	50		mV
		Tj=25°C, 8V ≤ V <sub>IN</sub> ≤ 20V, I <sub>OUT</sub> =200mA	1.0	25		mV
Load Regulation	ΔV <sub>oload</sub>	Tj=25°C, 5mA ≤ I <sub>OUT</sub> ≤ 500mA			100	mV
		Tj=25°C, 5mA ≤ I <sub>OUT</sub> ≤ 200mA			50	mV

Continued on next page.

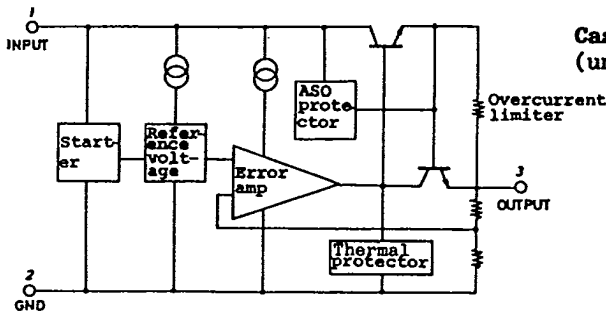

**Case Outline 3028-S3TR**  
(unit:mm)

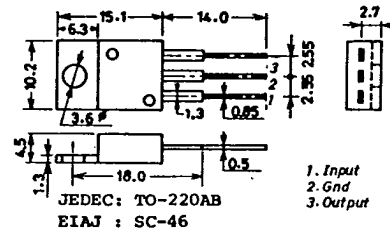

7307KI/8055MW/8031KI, TS No.929-1/8

L78M05,06,07,08,09,10,12,15,18,20,24

T-58-11-13

Continued from preceding page.

			min	typ	max	unit
Output Voltage	$V_{OUT}$	$7V \leq V_{IN} \leq 20V,$ $5mA \leq I_{OUT} \leq 350mA$	4.75		5.25	V
Current Dissipation	$I_{CC}$	$T_j = 25^\circ C$		4.5	6.0	mA
Current Dissipation Variation (Line)	$\Delta I_{CCline}$	$8V \leq V_{IN} \leq 25V,$ $I_{OUT} = 200mA$			0.8	mA
Current Dissipation Variation (Load)	$\Delta I_{CCload}$	$5mA \leq I_{OUT} \leq 350mA$			0.5	mA
Output Noise Voltage	$V_{NO}$	$10Hz \leq f \leq 100kHz$		40		$\mu V$
Ripple Rejection	$R_{rej}$	$f = 120Hz$ $8V \leq V_{IN} \leq 19V$ $T_j = 25^\circ C$	62			dB
		$I_{OUT} = 100mA$ $I_{OUT} = 300mA$	62	80		dB
Minimum Input-Output Voltage Drop	$V_{drop}$	$I_{OUT} = 350mA$		2.0		V
Short Current	$I_{OS}$	$T_j = 25^\circ C, V_{IN} = 35V, \text{ to GND}$		300		mA
Peak Output Current	$I_{op}$	$T_j = 25^\circ C$		0.7		A

[L78M06]

Recommended Operating Conditions at  $T_a = 25^\circ C$

				unit
Input Voltage	$V_{IN}$		8.5 to 21	V
Output Current	$I_{OUT}$		5 to 500	mA

Operating Characteristics at  $T_a = 25^\circ C, V_{IN} = 11V, I_{OUT} = 350mA$ , See specified Test Circuit.

			min	typ	max	unit
Output Voltage	$V_{OUT}$	$T_j = 25^\circ C$	5.75	6.0	6.25	V
Line Regulation	$\Delta V_{oline}$	$T_j = 25^\circ C, 8V \leq V_{IN} \leq 25V,$ $I_{OUT} = 200mA$		5.0	60	mV
		$T_j = 25^\circ C, 9V \leq V_{IN} \leq 20V,$ $I_{OUT} = 200mA$		1.5	30	mV
Load Regulation	$\Delta V_{oload}$	$T_j = 25^\circ C, 5mA \leq I_{OUT} \leq 500mA$ $T_j = 25^\circ C, 5mA \leq I_{OUT} \leq 200mA$			120	mV
					60	mV
Output Voltage	$V_{OUT}$	$8V \leq V_{IN} \leq 21V,$ $5mA \leq I_{OUT} \leq 350mA$		5.7	6.3	V
Current Dissipation	$I_{CC}$	$T_j = 25^\circ C$		4.5	6.0	mA
Current Dissipation Variation (Line)	$\Delta I_{CCline}$	$9V \leq V_{IN} \leq 25V,$ $I_{OUT} = 200mA$			0.8	mA
Current Dissipation Variation (Load)	$\Delta I_{CCload}$	$5mA \leq I_{OUT} \leq 350mA$			0.5	mA
Output Noise Voltage	$V_{NO}$	$10Hz \leq f \leq 100kHz$		45		$\mu V$
Ripple Rejection	$R_{rej}$	$f = 120Hz$ $9V \leq V_{IN} \leq 20V$ $T_j = 25^\circ C$	59			dB
		$I_{OUT} = 100mA$ $I_{OUT} = 300mA$	59	80		dB
Minimum Input-Output Voltage Drop	$V_{drop}$	$I_{OUT} = 350mA$		2.0		V
Short Current	$I_{OS}$	$T_j = 25^\circ C, V_{IN} = 35V, \text{ to GND}$		300		mA
Peak Output Current	$I_{op}$	$T_j = 25^\circ C$		0.7		A

[L78M07]

Recommended Operating Conditions at  $T_a = 25^\circ C$

				unit
Input Voltage	$V_{IN}$		9.5 to 22	V
Output Current	$I_{OUT}$		5 to 500	mA

L78M05,06,07,08,09,10,12,15,18,20,24

T-58-11-13

**Operating Characteristics at Ta=25°C, VIN=12V, IOUT=350mA, See specified Test Circuit.**

			min	typ	max	unit
Output Voltage	V <sub>OUT</sub>	T <sub>j</sub> =25°C	6.72	7.0	7.28	V
Line Regulation	ΔV <sub>oline</sub>	T <sub>j</sub> =25°C, 9V ≤ V <sub>IN</sub> ≤ 25V, I <sub>OUT</sub> =200mA		6.0	60	mV
		T <sub>j</sub> =25°C, 10V ≤ V <sub>IN</sub> ≤ 20V, I <sub>OUT</sub> =200mA		2.0	30	mV
Load Regulation	ΔV <sub>oload</sub>	T <sub>j</sub> =25°C, 5mA ≤ I <sub>OUT</sub> ≤ 500mA			140	mV
		T <sub>j</sub> =25°C, 5mA ≤ I <sub>OUT</sub> ≤ 200mA			70	mV
Output Voltage	V <sub>OUT</sub>	9V ≤ V <sub>IN</sub> ≤ 22V, 5mA ≤ I <sub>OUT</sub> ≤ 350mA	6.6		7.4	V
Current Dissipation	I <sub>CC</sub>	T <sub>j</sub> =25°C		4.6	6.0	mA
Current Dissipation Variation (Line)	ΔI <sub>CCline</sub>	10V ≤ V <sub>IN</sub> ≤ 25V, I <sub>OUT</sub> =200mA			0.8	mA
Current Dissipation Variation (Load)	ΔI <sub>CCload</sub>	5mA ≤ I <sub>OUT</sub> ≤ 350mA			0.5	mA
Output Noise Voltage	V <sub>NO</sub>	10Hz ≤ f ≤ 100kHz			48	uV
Ripple Rejection	R <sub>rej</sub>	f=120Hz   I <sub>OUT</sub> =100mA	58			dB
		10V ≤ V <sub>IN</sub> ≤ 21V   I <sub>OUT</sub> =300mA	58	80		dB
		T <sub>j</sub> =25°C				
Minimum Input-Output Voltage Drop	V <sub>drop</sub>	I <sub>OUT</sub> =350mA		2.0		V
Short Current	I <sub>OS</sub>	T <sub>j</sub> =25°C, V <sub>IN</sub> =35V, to GND		300		mA
Peak Output Current	I <sub>op</sub>	T <sub>j</sub> =25°C		0.7		A

**[L78M08]**

**Recommended Operating Conditions at Ta=25°C**

			unit
Input Voltage	V <sub>IN</sub>	10.5 to 23	V
Output Current	I <sub>OUT</sub>	5 to 500	mA

**Operating Characteristics at Ta=25°C, VIN=15V, IOUT=350mA, See specified Test Circuit.**

			min	typ	max	unit
Output Voltage	V <sub>OUT</sub>	T <sub>j</sub> =25°C	7.7	8.0	8.3	V
Line Regulation	ΔV <sub>oline</sub>	T <sub>j</sub> =25°C, 10.5V ≤ V <sub>IN</sub> ≤ 25V, I <sub>OUT</sub> =200mA		6.0	60	mV
		T <sub>j</sub> =25°C, 11V ≤ V <sub>IN</sub> ≤ 20V, I <sub>OUT</sub> =200mA		2.0	30	mV
Load Regulation	ΔV <sub>oload</sub>	T <sub>j</sub> =25°C, 5mA ≤ I <sub>OUT</sub> ≤ 500mA			160	mV
		T <sub>j</sub> =25°C, 5mA ≤ I <sub>OUT</sub> ≤ 200mA			80	mV
Output Voltage	V <sub>OUT</sub>	10.5V ≤ V <sub>IN</sub> ≤ 23V, 5mA ≤ I <sub>OUT</sub> ≤ 350mA	7.6		8.4	V
Current Dissipation	I <sub>CC</sub>	T <sub>j</sub> =25°C		4.6	6.0	mA
Current Dissipation Variation (Line)	ΔI <sub>CCline</sub>	11V ≤ V <sub>IN</sub> ≤ 25V, I <sub>OUT</sub> =200mA			0.8	mA
Current Dissipation Variation (Load)	ΔI <sub>CCload</sub>	5mA ≤ I <sub>OUT</sub> ≤ 350mA			0.5	mA
Output Noise Voltage	V <sub>NO</sub>	10Hz ≤ f ≤ 100kHz			50	uV
Ripple Rejection	R <sub>rej</sub>	f=120Hz   I <sub>OUT</sub> =100mA	56			dB
		11.5V ≤ V <sub>IN</sub> ≤ 22V   I <sub>OUT</sub> =300mA	56	80		dB
		T <sub>j</sub> =25°C				
Minimum Input-Output Voltage Drop	V <sub>drop</sub>	I <sub>OUT</sub> =350mA		2.0		V
Short Current	I <sub>OS</sub>	T <sub>j</sub> =25°C, V <sub>IN</sub> =35V, to GND		300		mA
Peak Output Current	I <sub>op</sub>	T <sub>j</sub> =25°C		0.7		A

L78M05,06,07,08,09,10,12,15,18,20,24

T-58-11-13

**[L78M09]****Recommended Operating Conditions at Ta=25°C**

			unit
Input Voltage	V <sub>IN</sub>	12 to 25	V
Output Current	I <sub>OUT</sub>	5 to 500	mA

**Operating Characteristics at Ta=25°C, V<sub>IN</sub>=16V, I<sub>OUT</sub>=350mA, See specified**

		Test Circuit.	min	typ	max	unit
Output Voltage	V <sub>OUT</sub>	T <sub>j</sub> =25°C	8.6	9.0	9.4	V
Line Regulation	ΔV <sub>oline</sub>	T <sub>j</sub> =25°C, 11.5V ≤ V <sub>IN</sub> ≤ 25V, I <sub>OUT</sub> =200mA	6.0	100		mV
		T <sub>j</sub> =25°C, 12V ≤ V <sub>IN</sub> ≤ 20V, I <sub>OUT</sub> =200mA	2.0	50		mV
Load Regulation	ΔV <sub>oload</sub>	T <sub>j</sub> =25°C, 5mA ≤ I <sub>OUT</sub> ≤ 500mA			180	mV
		T <sub>j</sub> =25°C, 5mA ≤ I <sub>OUT</sub> ≤ 200mA			90	mV
Output Voltage	V <sub>OUT</sub>	11.5V ≤ V <sub>IN</sub> ≤ 24V, 5mA ≤ I <sub>OUT</sub> ≤ 350mA	8.5		9.5	V
Current Dissipation	I <sub>CC</sub>	T <sub>j</sub> =25°C	4.6		6.0	mA
Current Dissipation Variation (Line)	ΔI <sub>CCline</sub>	12.5V ≤ V <sub>IN</sub> ≤ 25V, I <sub>OUT</sub> =200mA			0.8	mA
		5mA ≤ I <sub>OUT</sub> ≤ 350mA			0.5	mA
Current Dissipation Variation (Load)	ΔI <sub>CCload</sub>				0.5	mA
Output Noise Voltage	V <sub>NO</sub>	10Hz ≤ f ≤ 100kHz			60	uV
Ripple Rejection	R <sub>rej</sub>	f=120Hz   I <sub>OUT</sub> =100mA	56			dB
		12V ≤ V <sub>IN</sub> ≤ 23V   I <sub>OUT</sub> =300mA T <sub>j</sub> =25°C	56	80		dB
Minimum Input-Output Voltage Drop	V <sub>drop</sub>	I <sub>OUT</sub> =350mA	2.0			V
Short Current	I <sub>OS</sub>	T <sub>j</sub> =25°C, V <sub>IN</sub> =35V, to GND			300	mA
Peak Output Current	I <sub>op</sub>	T <sub>j</sub> =25°C	0.7			A

**[L78M10]****Recommended Operating Conditions at Ta=25°C**

			unit
Input Voltage	V <sub>IN</sub>	13 to 25	V
Output Current	I <sub>OUT</sub>	5 to 500	mA

**Operating Characteristics at Ta=25°C, V<sub>IN</sub>=17V, I<sub>OUT</sub>=350mA, See specified**

		Test Circuit.	min	typ	max	unit
Output Voltage	V <sub>OUT</sub>	T <sub>j</sub> =25°C	9.6	10.0	10.4	V
Line Regulation	ΔV <sub>oline</sub>	T <sub>j</sub> =25°C, 12.5V ≤ V <sub>IN</sub> ≤ 25V, I <sub>OUT</sub> =200mA	7.0	100		mV
		T <sub>j</sub> =25°C, 13V ≤ V <sub>IN</sub> ≤ 22V, I <sub>OUT</sub> =200mA	2.0	50		mV
Load Regulation	ΔV <sub>oload</sub>	T <sub>j</sub> =25°C, 5mA ≤ I <sub>OUT</sub> ≤ 500mA			200	mV
		T <sub>j</sub> =25°C, 5mA ≤ I <sub>OUT</sub> ≤ 200mA			100	mV
Output Voltage	V <sub>OUT</sub>	12.5V ≤ V <sub>IN</sub> ≤ 25V, 5mA ≤ I <sub>OUT</sub> ≤ 350mA	9.5		10.5	V
Current Dissipation	I <sub>CC</sub>	T <sub>j</sub> =25°C	4.6		6.0	mA
Current Dissipation Variation (Line)	ΔI <sub>CCline</sub>	13.5V ≤ V <sub>IN</sub> ≤ 25V, I <sub>OUT</sub> =200mA			0.8	mA
		5mA ≤ I <sub>OUT</sub> ≤ 350mA			0.5	mA
Current Dissipation Variation (Load)	ΔI <sub>CCload</sub>				0.5	mA
Output Noise Voltage	V <sub>NO</sub>	10Hz ≤ f ≤ 100kHz			65	uV
Ripple Rejection	R <sub>rej</sub>	f=120Hz   I <sub>OUT</sub> =100mA	55			dB
		13V ≤ V <sub>IN</sub> ≤ 25V   I <sub>OUT</sub> =300mA T <sub>j</sub> =25°C	55	80		dB

Continued on next page.

T-58-11-13

L78M05,06,07,08,09,10,12,15,18,20,24

Continued from preceding page.

			min	typ	max	unit
Minimum Input-Output Voltage Drop	$V_{drop}$	$I_{OUT}=350mA$		2.0		V
Short Current	$I_{OS}$	$T_j=25^{\circ}C, V_{IN}=35V, \text{ to GND}$		300		mA
Peak Output Current	$I_{op}$	$T_j=25^{\circ}C$		0.7		A

[L78M12]

Recommended Operating Conditions at  $T_a=25^{\circ}C$

				unit
Input Voltage	$V_{IN}$		15 to 25	V
Output Current	$I_{OUT}$		5 to 500	mA

Operating Characteristics at  $T_a=25^{\circ}C, V_{IN}=19V, I_{OUT}=350mA$ , See specified Test Circuit.

			min	typ	max	unit
Output Voltage	$V_{OUT}$	$T_j=25^{\circ}C$	11.5	12.0	12.5	V
Line Regulation	$\Delta V_{oline}$	$T_j=25^{\circ}C, 14.5V \leq V_{IN} \leq 30V, I_{OUT}=200mA$		8.0	100	mV
		$T_j=25^{\circ}C, 16V \leq V_{IN} \leq 25V, I_{OUT}=200mA$		2.0	50	mV
Load Regulation	$\Delta V_{oload}$	$T_j=25^{\circ}C, 5mA \leq I_{OUT} \leq 500mA$			240	mV
		$T_j=25^{\circ}C, 5mA \leq I_{OUT} \leq 200mA$			120	mV
Output Voltage	$V_{OUT}$	$14.5V \leq V_{IN} \leq 27V, 5mA \leq I_{OUT} \leq 350mA$	11.4		12.6	V
Current Dissipation	$I_{CC}$	$T_j=25^{\circ}C$		4.8	6.0	mA
Current Dissipation Variation (Line)	$\Delta I_{CCline}$	$15V \leq V_{IN} \leq 30V, I_{OUT}=200mA$			0.8	mA
Current Dissipation Variation (Load)	$\Delta I_{CCload}$	$5mA \leq I_{OUT} \leq 350mA$			0.5	mA
Output Noise Voltage	$V_{NO}$	$10Hz \leq f \leq 100kHz$			75	$\mu V$
Ripple Rejection	$R_{rej}$	$f=120Hz$		55	80	dB
		$15V \leq V_{IN} \leq 25V, I_{OUT}=100mA$		55		dB
		$T_j=25^{\circ}C, I_{OUT}=300mA$				
Minimum Input-Output Voltage Drop	$V_{drop}$	$I_{OUT}=350mA$		2.0		V
Short Current	$I_{OS}$	$T_j=25^{\circ}C, V_{IN}=35V, \text{ to GND}$		300		mA
Peak Output Current	$I_{op}$	$T_j=25^{\circ}C$		0.7		A

[L78M15]

Recommended Operating Conditions at  $T_a=25^{\circ}C$

				unit
Input Voltage	$V_{IN}$		18 to 30	V
Output Current	$I_{OUT}$		5 to 500	mA

Operating Characteristics at  $T_a=25^{\circ}C, V_{IN}=23V, I_{OUT}=350mA$ , See specified Test Circuit.

			min	typ	max	unit
Output Voltage	$V_{OUT}$	$T_j=25^{\circ}C$	14.4	15.0	15.6	V
Line Regulation	$\Delta V_{oline}$	$T_j=25^{\circ}C, 17.5V \leq V_{IN} \leq 30V, I_{OUT}=200mA$		10.0	100	mV
		$T_j=25^{\circ}C, 19V \leq V_{IN} \leq 30V, I_{OUT}=200mA$		3.0	50	mV
Load Regulation	$\Delta V_{oload}$	$T_j=25^{\circ}C, 5mA \leq I_{OUT} \leq 500mA$			300	mV
		$T_j=25^{\circ}C, 5mA \leq I_{OUT} \leq 200mA$			150	mV
Output Voltage	$V_{OUT}$	$17.5V \leq V_{IN} \leq 30V, 5mA \leq I_{OUT} \leq 350mA$	14.25		15.75	V
Current Dissipation	$I_{CC}$	$T_j=25^{\circ}C$		4.8	6.0	mA
Current Dissipation Variation (Line)	$\Delta I_{CCline}$	$17.5V \leq V_{IN} \leq 30V, I_{OUT}=200mA$			0.8	mA

Continued on next page.

L78M05,06,07,08,09,10,12,15,18,20,24

T-58-11-13

Continued from preceding page.

			min	typ	max	unit
Current Dissipation Variation (Load)	$\Delta I_{CCload}$	$5mA \leq I_{OUT} \leq 350mA$			0.5	mA
Output Noise Voltage	$V_{NO}$	$10Hz \leq f \leq 100kHz$		90		$\mu V$
Ripple Rejection	$R_{rej}$	$f=120Hz$ $18.5V \leq V_{IN} \leq 28.5V$ $T_j=25^\circ C$	$I_{OUT}=100mA$ $I_{OUT}=300mA$	54 70		dB dB
Minimum Input-Output Voltage Drop	$V_{drop}$	$I_{OUT}=350mA$		2.0		V
Short Current	$I_{OS}$	$T_j=25^\circ C, V_{IN}=35V, \text{ to GND}$		300		mA
Peak Output Current	$I_{op}$	$T_j=25^\circ C$		0.7		A

**[L78M18]**Recommended Operating Conditions at  $T_a=25^\circ C$ 

			unit
Input Voltage	$V_{IN}$	21 to 33	V
Output Current	$I_{OUT}$	5 to 500	mA

Operating Characteristics at  $T_a=25^\circ C, V_{IN}=27V, I_{OUT}=350mA$ , See specified

		Test Circuit.	min	typ	max	unit
Output Voltage	$V_{OUT}$	$T_j=25^\circ C$	17.3	18.0	18.7	V
Line Regulation	$\Delta V_{oline}$	$T_j=25^\circ C, 21V \leq V_{IN} \leq 35V,$ $I_{OUT}=200mA$	10.0	100		mV
Load Regulation	$\Delta V_{oload}$	$T_j=25^\circ C, 22V \leq V_{IN} \leq 35V,$ $I_{OUT}=200mA$	5.0	50		mV
Output Voltage	$V_{OUT}$	$T_j=25^\circ C, 5mA \leq I_{OUT} \leq 500mA$ $T_j=25^\circ C, 5mA \leq I_{OUT} \leq 200mA$			360 180	mV mV
Current Dissipation	$I_{CC}$	$21V \leq V_{IN} \leq 33V,$ $5mA \leq I_{OUT} \leq 350mA$ $T_j=25^\circ C$	17.1		18.9	V
Current Dissipation Variation (Line)	$\Delta I_{CCline}$	$21V \leq V_{IN} \leq 33V,$ $I_{OUT}=200mA$		4.9	6.0	mA
Current Dissipation Variation (Load)	$\Delta I_{CCload}$	$5mA \leq I_{OUT} \leq 350mA$			0.8	mA
Output Noise Voltage	$V_{NO}$	$10Hz \leq f \leq 100kHz$		100		$\mu V$
Ripple Rejection	$R_{rej}$	$f=120Hz$ $22V \leq V_{IN} \leq 33V,$ $T_j=25^\circ C$	$I_{OUT}=100mA$ $I_{OUT}=300mA$	53 70		dB dB
Minimum Input-Output Voltage Drop	$V_{drop}$	$I_{OUT}=350mA$		2.0		V
Short Current	$I_{OS}$	$T_j=25^\circ C, V_{IN}=35V, \text{ to GND}$		300		mA
Peak Output Current	$I_{op}$	$T_j=25^\circ C$		0.7		A

**[L78M20]**Recommended Operating Conditions at  $T_a=25^\circ C$ 

			unit
Input Voltage	$V_{IN}$	23 to 35	V
Output Current	$I_{OUT}$	5 to 500	mA

Operating Characteristics at  $T_a=25^\circ C, V_{IN}=29V, I_{OUT}=350mA$ , See specified

		Test Circuit.	min	typ	max	unit
Output Voltage	$V_{OUT}$	$T_j=25^\circ C$	19.2	20.0	20.8	V
Line Regulation	$\Delta V_{oline}$	$T_j=25^\circ C, 23V \leq V_{IN} \leq 35V,$ $I_{OUT}=200mA$	10.0	100		mV
		$T_j=25^\circ C, 24V \leq V_{IN} \leq 35V,$ $I_{OUT}=200mA$	5.0	50		mV

Continued on next page.

L78M05,06,07,08,09,10,12,15,18,20,24

T-58-11-13

Continued from preceding page.

			min	typ	max	unit
Load Regulation	$\Delta V_{\text{load}}$	$T_j=25^\circ\text{C}, 5\text{mA} \leq I_{\text{OUT}} \leq 500\text{mA}$			400	mV
		$T_j=25^\circ\text{C}, 5\text{mA} \leq I_{\text{OUT}} \leq 200\text{mA}$			200	mV
Output Voltage	$V_{\text{OUT}}$	$23\text{V} \leq V_{\text{IN}} \leq 35\text{V},$ $5\text{mA} \leq I_{\text{OUT}} \leq 350\text{mA}$	19.0		21.0	V
Current Dissipation	$I_{\text{CC}}$	$T_j=25^\circ\text{C}$		4.9	6.0	mA
Current Dissipation Variation (Line)	$\Delta I_{\text{CCline}}$	$23\text{V} \leq V_{\text{IN}} \leq 35\text{V},$ $I_{\text{OUT}}=200\text{mA}$			0.8	mA
Current Dissipation Variation (Load)	$\Delta I_{\text{CCload}}$	$5\text{mA} \leq I_{\text{OUT}} \leq 350\text{mA}$			0.5	mA
Output Noise Voltage	$V_{\text{NO}}$	$10\text{Hz} \leq f \leq 100\text{kHz}$			110	$\mu\text{V}$
Ripple Rejection	$R_{\text{rej}}$	$f=120\text{Hz}$ $24\text{V} \leq V_{\text{IN}} \leq 34\text{V},$ $T_j=25^\circ\text{C}$			53	dB
		$I_{\text{OUT}}=100\text{mA}$			70	dB
		$I_{\text{OUT}}=300\text{mA}$				
Minimum Input-Output Voltage Drop	$V_{\text{drop}}$	$I_{\text{OUT}}=350\text{mA}$			2.0	V
Short Current	$I_{\text{OS}}$	$T_j=25^\circ\text{C}, V_{\text{IN}}=35\text{V}, \text{ to GND}$			300	mA
Peak Output Current	$I_{\text{op}}$	$T_j=25^\circ\text{C}$			0.7	A

## [L78M24]

Recommended Operating Conditions at  $T_a=25^\circ\text{C}$ 

				unit
Input Voltage	$V_{\text{IN}}$		27 to 35	V
Output Current	$I_{\text{OUT}}$		5 to 500	mA

Operating Characteristics at  $T_a=25^\circ\text{C}, V_{\text{IN}}=33\text{V}, I_{\text{OUT}}=350\text{mA}$ , See specified

			min	typ	max	unit
Output Voltage	$V_{\text{OUT}}$	$T_j=25^\circ\text{C}$	23.0	24.0	25.0	V
Line Regulation	$\Delta V_{\text{oline}}$	$T_j=25^\circ\text{C}, 27\text{V} \leq V_{\text{IN}} \leq 35\text{V},$ $I_{\text{OUT}}=200\text{mA}$		10.0	100	mV
		$T_j=25^\circ\text{C}, 28\text{V} \leq V_{\text{IN}} \leq 35\text{V},$ $I_{\text{OUT}}=200\text{mA}$			5.0	50
Load Regulation	$\Delta V_{\text{load}}$	$T_j=25^\circ\text{C}, 5\text{mA} \leq I_{\text{OUT}} \leq 500\text{mA}$			480	mV
		$T_j=25^\circ\text{C}, 5\text{mA} \leq I_{\text{OUT}} \leq 200\text{mA}$			240	mV
Output Voltage	$V_{\text{OUT}}$	$27\text{V} \leq V_{\text{IN}} \leq 35\text{V},$ $5\text{mA} \leq I_{\text{OUT}} \leq 350\text{mA}$	22.8		25.2	V
Current Dissipation	$I_{\text{CC}}$	$T_j=25^\circ\text{C}$		5.0	6.0	mA
Current Dissipation Variation (Line)	$\Delta I_{\text{CCline}}$	$27\text{V} \leq V_{\text{IN}} \leq 35\text{V},$ $I_{\text{OUT}}=200\text{mA}$			0.8	mA
Current Dissipation Variation (Load)	$\Delta I_{\text{CCload}}$	$5\text{mA} \leq I_{\text{OUT}} \leq 350\text{mA}$			0.5	mA
Output Noise Voltage	$V_{\text{NO}}$	$10\text{Hz} \leq f \leq 100\text{kHz}$			170	$\mu\text{V}$
Ripple Rejection	$R_{\text{rej}}$	$f=120\text{Hz}$ $28\text{V} \leq V_{\text{IN}} \leq 35\text{V},$ $T_j=25^\circ\text{C}$			50	dB
		$I_{\text{OUT}}=100\text{mA}$			70	dB
		$I_{\text{OUT}}=300\text{mA}$				
Minimum Input-Output Voltage Drop	$V_{\text{drop}}$	$I_{\text{OUT}}=350\text{mA}$			2.0	V
Short Current	$I_{\text{OS}}$	$T_j=25^\circ\text{C}, V_{\text{IN}}=35\text{V}, \text{ to GND}$			300	mA
Peak Output Current	$I_{\text{op}}$	$T_j=25^\circ\text{C}$			0.7	A

L78M05,06,07,08,09,10,12,15,18,20,24 T-58-11-13

Specified Test Circuit (Common to L78M00 series)

