


FEATURES

- Hermetically Sealed Case
- High Reliability Device
- Low Forward Power Loss, High Efficiency
- High Surge Capability
- 30 Volts through 60 Volts Types Available

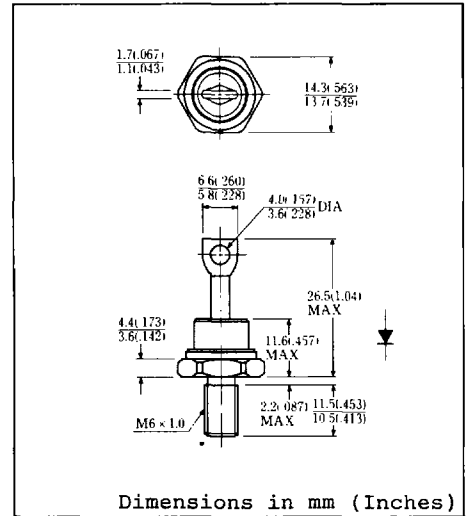

Dimensions in mm (Inches)

Approx. Net Weight : 12 Grams

MAXIMUM RATINGS

Voltage Rating	TYPE	◆ 41MQ30	◆ 41MQ40	Unit	
	Symbol				
Repetitive Peak Reverse Voltage	V_{RRM}	30	40	v	
Non-Repetitive Peak Reverse Voltage	V_{RSM}	35	45	V	
Electrical Rating	Symbol	Condition		Rating	Unit
Average Rectified Output Current	I_O	180° rectangular wave conduction $T_C = 77^\circ C$		44	A
		180° sinusoidal wave conduction $T_C = 88^\circ C$		40	
RMS Forward Current	$I_{F(RMS)}$			63	A
Peak One-cycle Forward Surge Current	I_{FSM}	50Hz half sine wave, non-repetitive		600	A
Operating Junction Temperature Range	T_{jw}			-40 to 125	°C
Storage Temperature Range	T_{stg}			-40 to 125	°C
Mounting Torque	F_{tor}	Base Hex (recommend torque)		2.4 (24.5)	N•m (kgf•cm)
		Stud Nut (recommend torque)		1.6 (16.3)	

ELECTRICAL & THERMAL CHARACTERISTICS

Characteristics	Symbol	Test Condition		Max.	Unit
Peak Forward Voltage	V_{FM}	$I_{FM} = 40A$	$T_j = 25^\circ C$	0.55	v
Peak Reverse Current	I_{RM}	$V_{RM} = V_{RRM}$	$T_j = 25^\circ C$	25	mA
Thermal Resistance	$R_{th(j-c)}$	Junction to Case		1.1	°C/W
	$R_{th(c-f)}$	Case to Fin		0.3	

◆ For spare parts only

FIG.1-FORWARD VOLTAGE VS. FORWARD CURRENT




FIG.2-AVERAGE FORWARD POWER DISSIPATION

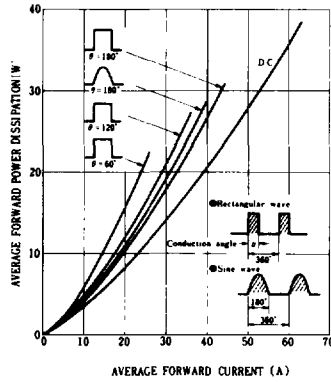


FIG.3-PEAK REVERSE CURRENT VS. PEAK REVERSE VOLTAGE

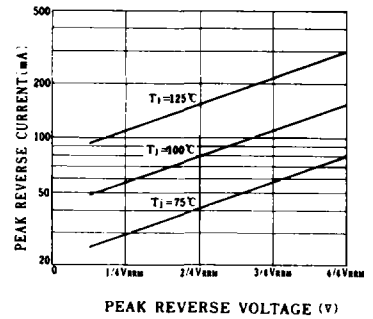


FIG.4-AVERAGE REVERSE POWER DISSIPATION

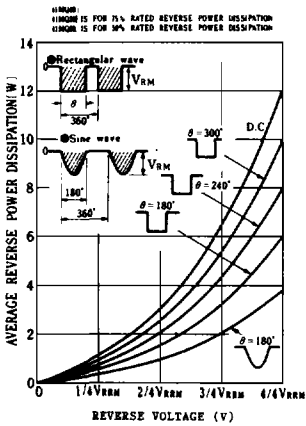


FIG.5-AVERAGE FORWARD CURRENT VS. CASE TEMPERATURE

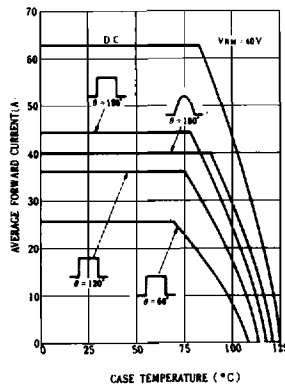


FIG.6-TRANSIENT THERMAL IMPEDANCE

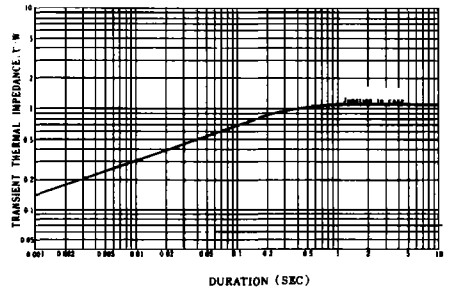


FIG.7-SURGE CURRENT RATINGS




FIG.8-JUNCTION CAPACITANCE VS. REVERSE VOLTAGE

