


Series:

- Stainless steel termination for corrosion resistance
- Panel mounting and wiring socket accessories (see pages 27 and 28)
- Large fresnel lens for excellent wide angle viewing
- MLQ 20
- MTBF 90,000 hrs

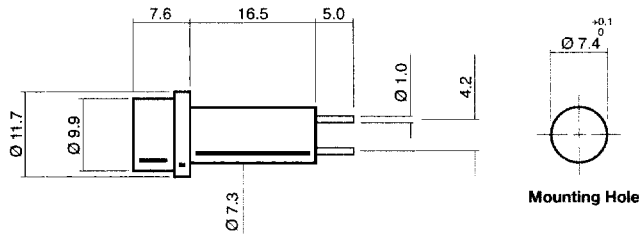

Scale 1 : 1
Dimensions in mm (Typical)

Ordering information and technical characteristics (Ta = 25°C)

Order code	Colour	Lens	Voltage DC Vopr	Current DC Iopr	Luminous Intensity Iv @ Iopr	Wave Length λp	Viewing Angle (Inclusive)	Operating Temp Topr	Storage Temp Tstg
426 - 555 - 04	Red		2.1	20	68	650			
426 - 558 - 04	Orange		2.1	20	100	610			
426 - 561 - 04	Yellow		2.2	20	68	585			
426 - 564 - 04	Green		2.2	20	100	563			
426 - 555 - 20	Red		5/6	15/20	51/68	650			
426 - 558 - 20	Orange		5/6	15/20	75/100	610			
426 - 561 - 20	Yellow		5/6	15/20	51/68	585			
426 - 564 - 20	Green	Water Clear	5/6	15/20	75/100	563	180		
426 - 555 - 21	Red		12	20	68	650			
426 - 558 - 21	Orange		12	20	100	610			
426 - 561 - 21	Yellow		12	20	68	585			
426 - 564 - 21	Green		12	20	100	563			
426 - 555 - 22	Red		24	20	68	650			
426 - 558 - 22	Orange		24	20	100	610			
426 - 561 - 22	Yellow		24	20	68	585		0	0
426 - 564 - 22	Green		24	20	100	563		to	to
427 - 555 - 04	Red		2.1	20	68	650		+ 85	+ 85
427 - 558 - 04	Orange		2.1	20	100	610			
427 - 561 - 04	Yellow		2.2	20	68	585			
427 - 564 - 04	Green		2.2	20	100	563			
427 - 555 - 20	Red		5/6	15/20	51/68	650			
427 - 558 - 20	Orange		5/6	15/20	75/100	610			
427 - 561 - 20	Yellow		5/6	15/20	51/68	585			
427 - 564 - 20	Green	Coloured Diffused	5/6	15/20	75/100	563	180		
427 - 555 - 21	Red		12	20	68	650			
427 - 558 - 21	Orange		12	20	100	610			
427 - 561 - 21	Yellow		12	20	68	585			
427 - 564 - 21	Green		12	20	100	563			
427 - 555 - 22	Red		24	20	68	650			
427 - 558 - 22	Orange		24	20	100	610			
427 - 561 - 22	Yellow		24	20	68	585			
427 - 564 - 22	Green		24	20	100	563			
			V	mA	mcd	nm	deg	°C	°C