


# EB71F71 Series

- Oven Controlled Crystal Oscillator (OCXO)
- AT-Cut Crystal
- HCMOS output
- 5.0V supply voltage
- 5 pin DIP package
- External control voltage option available
- Stability to 30ppb

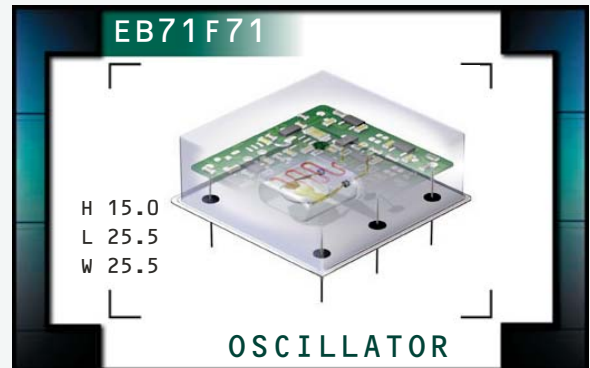

## ELECTRICAL SPECIFICATIONS

<b>Frequency Range</b>	1.544MHz to 44.736MHz	
<b>Operating Temperature Range (OTR)</b>	0°C to 50°C, 0°C to 70°C, or -20°C to 70°C	
<b>Storage Temperature Range</b>	-55°C to 125°C	
<b>Supply Voltage (V<sub>DD</sub>)</b>	5.0V <sub>DC</sub> ±5%	
<b>Frequency Tolerance / Stability</b>		
vs. Initial Tolerance	at Nominal V <sub>DD</sub> and V <sub>C</sub> at 25°C	±2.0ppm, ±1.5ppm, ±1.0ppm, ±500ppb, or ±300ppb Maximum
vs. Temperature Stability	at Nominal V <sub>DD</sub> and V <sub>C</sub>	±30ppb, ±50ppb, ±80ppb, ±100ppb, ±200ppb, ±280ppb, or ±500ppb Maximum
vs. V <sub>DD</sub>	V <sub>DD</sub> ±5%	±20ppb Maximum
vs. Load	V <sub>load</sub> ±5%	±20ppb Maximum
vs. Aging (1 Day)	after 72 Hours of Operation	±3.0ppb Maximum
vs. Aging (1 Year)	after 72 Hours of Operation	±500ppb Maximum
vs. Aging (10 Years)	after 72 Hours of Operation	±3.0ppm Maximum
<b>Crystal Cut</b>	AT-Cut	
<b>Warm Up Time</b>	to ±500ppb of Final Frequency at 1 Hour at 25°C	3 Minutes Maximum
<b>Power Consumption</b>	at Steady State, at 25°C	2.2 Watts Maximum
	During Warm Up, at 25°C	3.0 Watts Maximum
<b>Output Voltage Logic High (V<sub>OH</sub>)</b>	I <sub>OH</sub> = -8mA	V <sub>DD</sub> - 0.5V <sub>DC</sub> Minimum
<b>Output Voltage Logic Low (V<sub>OL</sub>)</b>	I <sub>OL</sub> = +8mA	0.5V <sub>DC</sub> Maximum
<b>Rise Time / Fall Time</b>	≤ 10.000MHz Measured at 20% to 80% of Waveform	10 nSec Maximum
	> 10.000MHz Measured at 20% to 80% of Waveform	6 nSec Maximum
<b>Duty Cycle</b>	Measured at 50% of Waveform	50 ±5(%)
<b>Load Drive Capability</b>	30pF HCMOS Load Maximum	
<b>Frequency Deviation</b>	Referenced to F <sub>0</sub> at V <sub>C</sub> = 2.5V <sub>DC</sub> ; V <sub>DD</sub> = 5.0V <sub>DC</sub> over OTR	±7ppm Minimum, ±20ppm Maximum
<b>Control Voltage Range</b>	0.0V <sub>DC</sub> to V <sub>DD</sub>	
<b>Control Voltage (V<sub>C</sub>)</b>	2.5V <sub>DC</sub> ±2.0V <sub>DC</sub>	
<b>Transfer Function</b>	Positive Transfer Characteristic	
<b>Reference Voltage Output</b>	4.0V <sub>DC</sub> ±0.3V <sub>DC</sub>	
<b>Linearity</b>	±10% Maximum	
<b>Input Impedance</b>	10kOhms Typical	
<b>Typical Phase Noise (at 12.800MHz)</b>	1Hz Offset	-75dBc/Hz
	10Hz Offset	-100dBc/Hz
	100Hz Offset	-130dBc/Hz
	1kHz Offset	-140dBc/Hz
	10kHz Offset	-150dBc/Hz

MANUFACTURER ECLIPTEK CORP.	CATEGORY OSCILLATOR	SERIES EB71F71	PACKAGE 5 pin DIP	VOLTAGE 5.0V	CLASS OS2D	REV. DATE 10/03
--------------------------------	------------------------	-------------------	----------------------	-----------------	---------------	--------------------

# PART NUMBERING GUIDE

**EB71F71 A 10 B V 2 - 20.000M**

**INITIAL TOLERANCE**  
 A=±2.0ppm, B=±1.5ppm, C=±1.0ppm, D=±500ppb,  
 E=±300ppb

**FREQUENCY STABILITY**  
 2 Digit Code Per Table 1

**OPERATING TEMPERATURE RANGE**  
 1 Letter Code Per Table 1

**FREQUENCY**

**DUTY CYCLE**  
 2=50% ±5%


**VOLTAGE CONTROL OPTION**

N=None (No Connect on Pin 3 and Pin 4)  
 V=Voltage Control on Pin 3 and Reference  
 Voltage Output on Pin 4


**TABLE 1: PART NUMBERING CODES**

Operating Temperature Range	FREQUENCY STABILITY X Denotes availability							
		±30ppb	±50ppb	±80ppb	±100ppb	±200ppb	±280ppb	±500ppb
	Code	03	05	08	10	20	28	50
0°C to +50°C	A	X	X	X	X	X	X	X
0°C to +70°C	B		X	X	X	X	X	X
-20°C to +70°C	C			X	X	X	X	X


**MECHANICAL DIMENSIONS**  
 ALL DIMENSIONS IN MILLIMETERS



Pin 1: Output  
 Pin 2: Case/Ground  
 Pin 3: No Connect or Voltage Control



Pin 4: No Connect or Reference Voltage Output  
 Pin 5: Supply Voltage

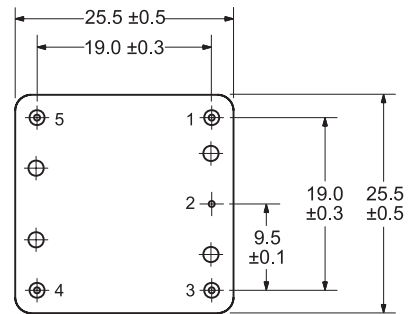

**ENVIRONMENTAL/MECHANICAL SPECIFICATIONS**

Characteristic	Specification
Gross Leak Test	MIL-STD-883, Method 1014, Condition C
Mechanical Shock	MIL-STD-202, Method 213, Condition C
Vibration	MIL-STD-883, Method 2007, Condition A
Lead Integrity	MIL-STD-883, Method 2004
Solderability	MIL-STD-883, Method 2002
Temperature Cycling	MIL-STD-883, Method 1010
Resistance to Soldering Heat	MIL-STD-883, Method 210
Resistance to Solvents	MIL-STD-883, Method 215

**MARKING SPECIFICATIONS**

Line 1: ECLIPTEK  
 Line 2: XX.XXX M  
 Frequency in MHz (5 Digits Maximum + Decimal)  
 Line 3: XX Y ZZ  
 Week of Year  
 Last Digit of Year  
 Ecliptek Manufacturing Identifier

Note: Pin 1 shall be designated with a dot

MANUFACTURER ECLIPTEK CORP.	CATEGORY OSCILLATOR	SERIES EB71F71	PACKAGE 5 pin DIP	VOLTAGE 5.0V	CLASS OS2D	REV. DATE 10/03
--------------------------------	------------------------	-------------------	----------------------	-----------------	---------------	--------------------