


HEADER SOCKETS IDC


SERIES W7100

- Without strain relief
- Meets MIL-C-83503
- Ribbed and grooved for positive cable positioning
- Mates with shrouded headers
- AWG 28 or 30

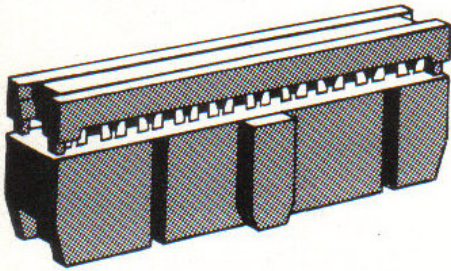



SERIES W7100S

- With strain relief
- Meets MIL-C-83503
- Ribbed and grooved for positive cable positioning
- Mates with shrouded headers
- AWG 28 or 30

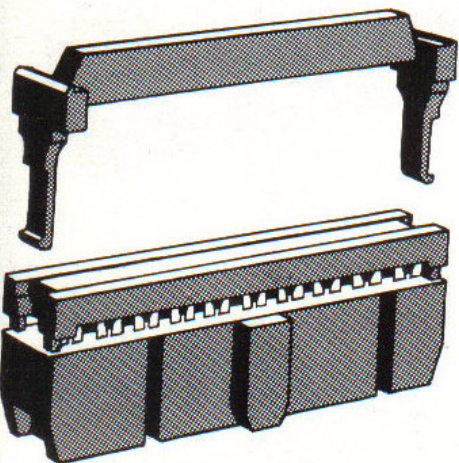

NO. OF PINS	DIMENSIONS			
	A	B	C	D
10	11.43	17.27	10.16	6.74
14	16.51	22.35	15.24	9.28
16	19.05	24.89	17.78	10.55
20	24.13	29.97	22.86	13.09
26	31.75	37.59	30.48	16.90
30	36.83	42.67	35.56	19.44
34	41.91	47.75	40.64	21.98
40	49.53	55.37	48.26	25.79
50	62.63	68.07	60.96	32.14
60	74.93	80.77	73.66	38.49
64	80.01	85.85	78.74	41.03

PART NUMBER EXPLANATION

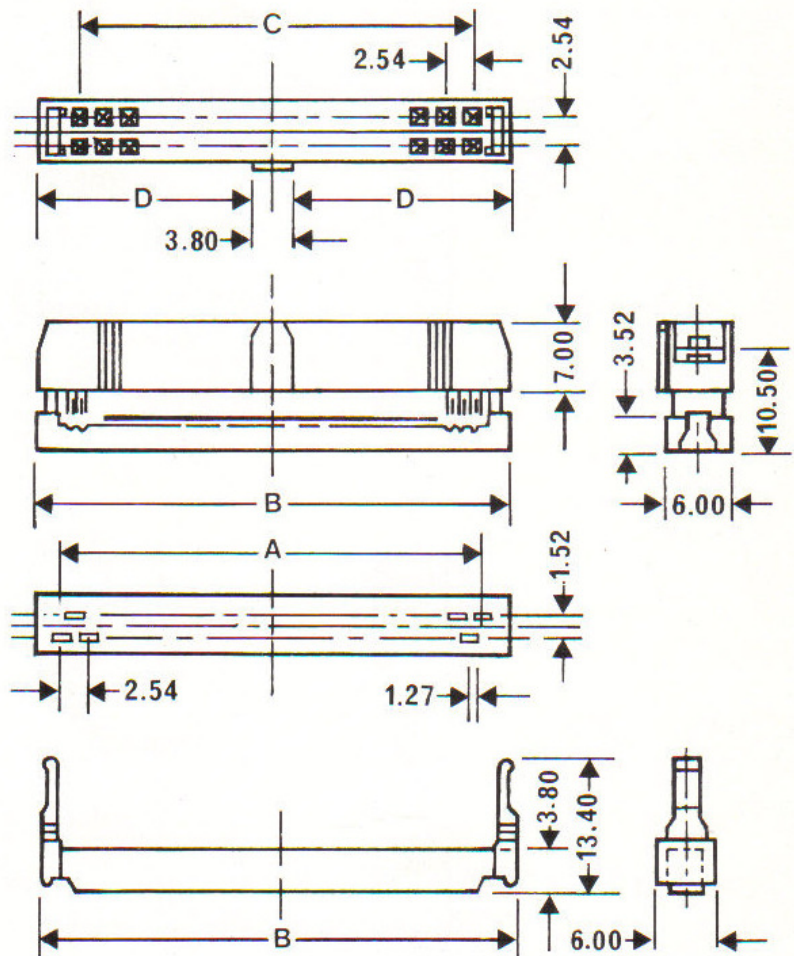

STRAIN RELIEF

SPECIFICATIONS

Insulator 30% Glass-filled Polyester
Flammability UL94V-O
Contact Phosphor Bronze or Brass
Contact Plating Gold over Nickel
 (Standard Gold 0.25 μ
 Other plating thicknesses
 available on request)

Electrical
Contact Resistance 10m Ω maximum at
 DC 1amp
Insulator Resistance 500M Ω minimum at 500V
Current Rating 1 amp
Voltage 500V AC for one minute
Operating Temperature -55°C to +105°C