



Features

- Triple-output 2" x 2"
- Open-frame construction
- 1.5 million hours MTBF
- Short-circuit and overvoltage protection
- Input undervoltage lockout
- 24 V or 48 V input versions
- 1500 V isolation
- 100 °C baseplate operation


Description

OET triple output dc-dc converters provide 25 watts of output power in an industry-standard package. The OET Series features excellent efficiency and industry-leading power density. The OET features open-frame packaging to provide maximum useable power with minimal thermal constraints. These units are fully compatible with production board washing processes.

Technical Specifications

Input	
Voltage Range	18 - 36 VDC
24 VDC Nominal	18 - 36 VDC
48 VDC Nominal	34 - 75 VDC
Turn On Voltage 24V/48V Models	<17V / <34V
Turn On Hysteresis	1V Nominal
Reflected Ripple Input Current	50 mA pk-pk
Input Reverse Voltage Protection	Shunt Diode

Output	
Setpoint Accuracy	±1%
Line Regulation V_{in} Min. - V_{in} Max., I_{out} Rated	0.2% V_{out}
Load Regulation I_{out} Min. - I_{out} Max., V_{in} Nom.	0.5% V_{out}
Secondary Output Regulation, All Line/Load Conditions	10% V_{out}
Minimum Output Current	10 % I_{out} rated
Dynamic Regulation, Loadstep	25% I_{out}
PK Deviation	4% V_{out}
Settling Time	500 μ s
Short Circuit And Overcurrent Protection	Shutdown and Self-Recovering
Power Limit/Threshold Range	110 - 130%
Short Circuit	200% I_{out} Nom.
OVP Trip Range	115 - 140% V_{out} Nom.
OVP Type	Self-Recovering

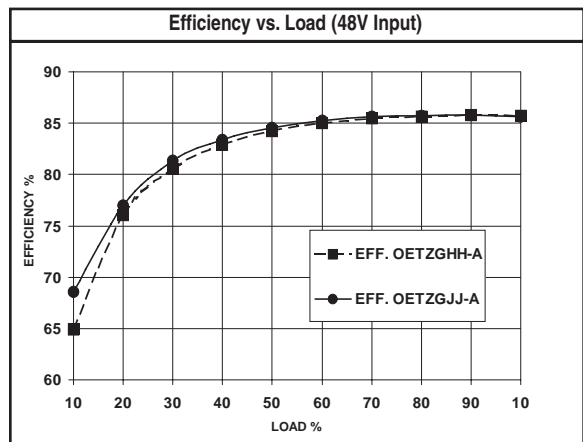

Notes
† MTBF predictions may vary slightly from model to model.
Specifications typically at 25 °C, normal line, and full load, unless otherwise stated.
Soldering Conditions: I/O pins, 260 °C, ten seconds; fully compatible with commercial wave-soldering equipment.
Safety: Agency approvals may vary from model to model. Please consult factory for specific model information.
Units are water-washable and fully compatible with commercial spray or immersion post wave-solder washing equipment.

General	
Switching Frequency	500 kHz
Turn-On Time	10ms
Remote Shutdown	Positive Logic
Isolation	
Input - Output	1500 VDC
Input - Case	1050 VDC
Output - Case	1050 VDC
Temperature Coefficient	0.03%/ °C
Case Temperature	
Operating Range	-40 to +100 °C
Storage Range	-40 to +125 °C
Thermal Shutdown Range	105 to 115 °C
Humidity Max., Non-Condensing	95%
Vibration, 3 Axes, 5 Min Each	5 g, 10 - 55 Hz
MTBF [†] (Bellcore TR-NWT-000332)	1.5 x 10 ⁶ hrs
Safety	UL, cUL, TUV
Weight (approx.)	1.3 oz


Model Selection

MODEL	INPUT VOLTAGE (VOLTS)	INPUT VOLTAGE RANGE (VOLTS)	MAXIMUM INPUT CURRENT (AMPS)*	OUTPUT VOLTAGE (VOLTS)	RATED OUTPUT CURRENT (AMPS)	RIPPLE & NOISE pk-pk (mV)	TYPICAL EFFICIENCY**
OET025YGHH-A	24	18-36	1.8	5, ±12	3.5, ±0.31	50, 120	86%
OET025YGJJ-A	24	18-36	1.8	5, ±15	3.5, ±0.25	50, 150	86%
OET020ZEHH-A	48	34-75	0.7	3.3, ±12	3.5, ±0.35	50, 120	85%
OET020ZEJJ-A	48	34-75	0.7	3.3, ±15	3.5, ±0.28	50, 150	85%
OET025ZGHH-A	48	34-75	0.9	5, ±12	3.5, ±0.31	50, 120	85%
OET025ZGJJ-A	48	34-75	0.9	5, ±15	3.5, ±0.25	50, 150	85%

NOTES: * Maximum input current at minimum input voltage, maximum rated output power.
 ** At nominal V_{in} , rated output.

Model numbers highlighted in yellow or shaded are not recommended for new designs.

Mechanical Drawing

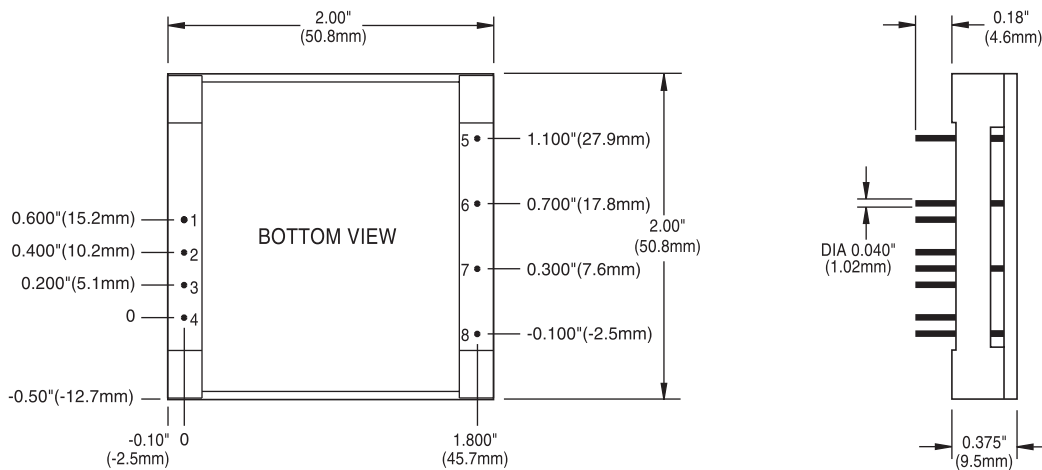

Thermal Impedance	
Natural Convection	11.0 °C/W
100 LFM	7.5 °C/W
200 LFM	5.0 °C/W
300 LFM	3.7 °C/W
400 LFM	3.1 °C/W

Note:
 Thermal impedance data is dependent on many environmental factors. The exact thermal performance should be validated for specific application.

Pin	Function
1	+ V_{in}
2	- V_{in}
3	case
4	enable
5	+ V_{out} (aux)
6	+ V_{out} (main)
7	common
8	- V_{out} (aux)

Tolerances	
Inches:	(Millimeters)
.XX ± 0.020	.X ± 0.5
.XXX ± 0.010	.XX ± 0.25
Pin:	
± 0.002	± 0.05

(Dimensions as listed unless otherwise specified.)

NUCLEAR AND MEDICAL APPLICATIONS - Power-One products are not designed, intended for use in, or authorized for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems without the express written consent of the respective divisional president of Power-One, Inc.

TECHNICAL REVISIONS - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.