
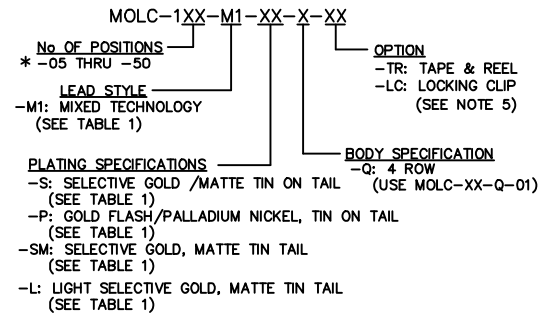


DO NOT SCALE FROM THIS PRINT

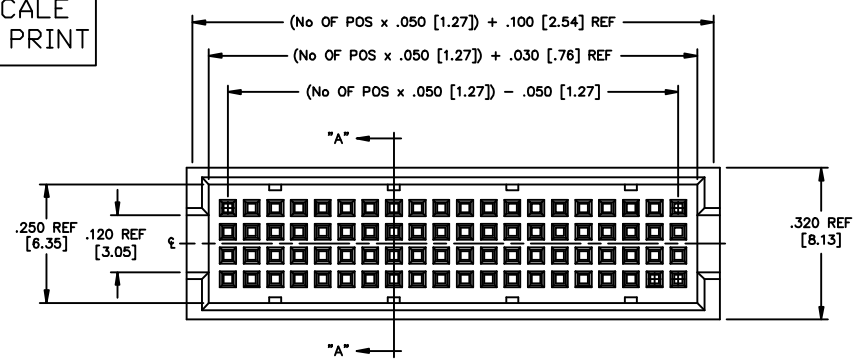

* NOTE: ASSEMBLY TOOLING IS CAPABLE OF BUILDING THE -20, -30 & -50 POSITIONS ONLY AT THIS TIME. WILL HAVE TO BUILD NEW ASSEMBLY TOOLING FOR OTHER SIZES AS REQUIRED BY SALES AND MARKETING.




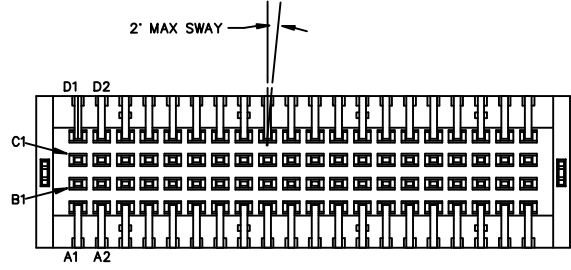


TABLE 1	
PLATING	TERMINAL
-S	T-1R16-01-S-2
-P	T-1R16-01-P-2
-SM	T-1R16-01-S-2

NOTES:

1. MINIMUM PUSHOUT FORCE: .5 LBS.
2. INSULATOR MATERIAL: VECTRA E130
3. TERMINAL MATERIAL: PHOS-BRONZE, 1/2 HARD
4. MEASURED AT BEND RADIUS.
5. DUE TO THE HIGH AMOUNT OF INSERTION FORCE NEEDED, THE -LC OPTION IS NOT COMPATIBLE WITH AUTO PLACEMENT. SAMTEC RECOMMENDS MANUAL PLACEMENT FOR ALL ASSEMBLIES WITH THE -LC OPTION.

PROPRIETARY NOTE
 THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC INC. AND SHALL NOT BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN CONSENT OF SAMTEC INC.

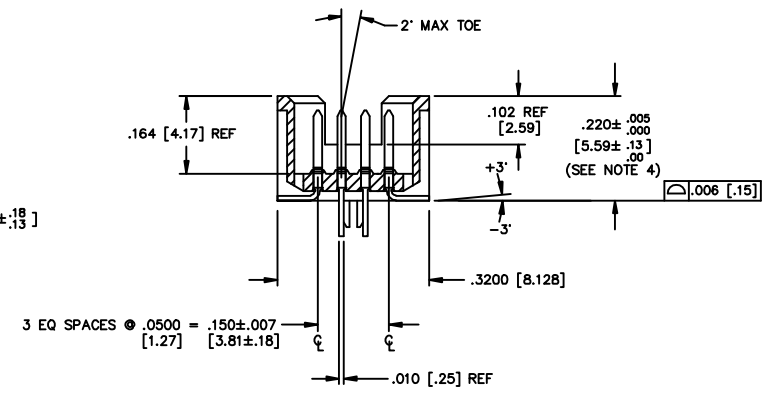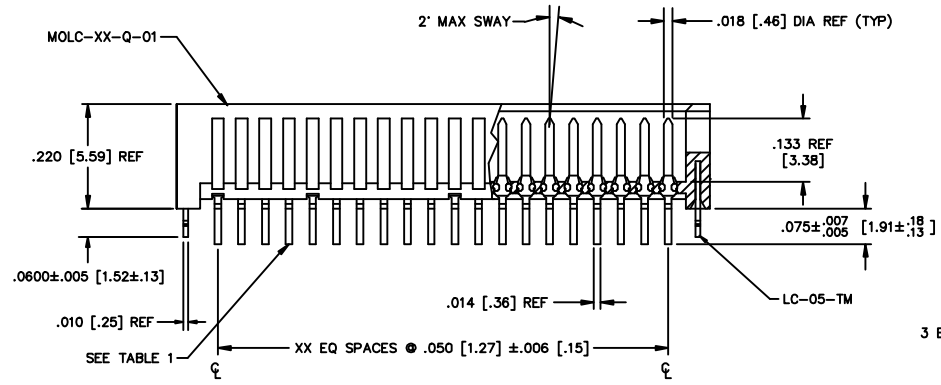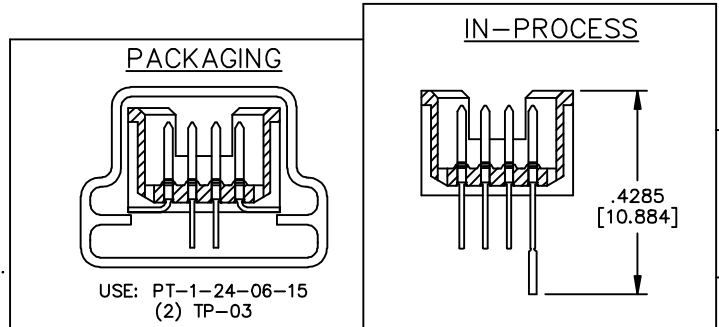

EXISPROD\MISC\MKTG MOLCMTMK

samtec

520 PARK EAST BLVD. NEW ALBANY, INDIANA 47150
 PHONE (812) 944-6733 P.O. BOX 1147
 CODE 55322

MADE BY: PLUMMER 04-01-96

MOLC-1XX-M1-XX-X-XX
 SHEET 1 OF 1