

**SPECIFICATIONS**

**Mechanical**

**Mating Force:** 4.54Kg (10Lb) max. per Port  
**Unmating Force:** 0.64Kg (1.4Lb) min. per Port  
**Durability:** 2000 Cycles

**Electrical**


**Voltage Rating:** 30V  
**Current Rating:** 0.5A  
**Contact Resistance:** 60mΩ max.  
**Dielectric Withstanding Voltage:** 250V rms AC min.  
**Insulation Resistance:** 500MΩ min.

**Physical**


**Housing:** Thermoplastic, UL 94V-0 rated in Black Color  
**Contact:** Copper alloy  
**Plating:** See "ORDERING INFORMATION"  
**Operating Temperature:** -50°C to +85°C

**Ultra SCSI Connector**

**QAU Series**  
**Straddle Mount, T/H Type**  
**0.80mm [.032"] Pitch**  
**Stacked 68 Pos.**

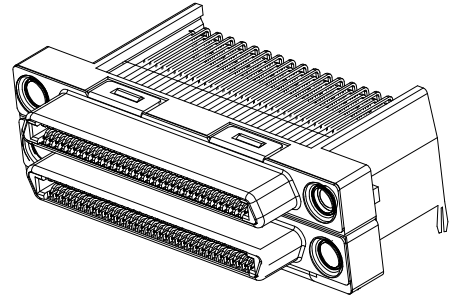

**DRAWING**

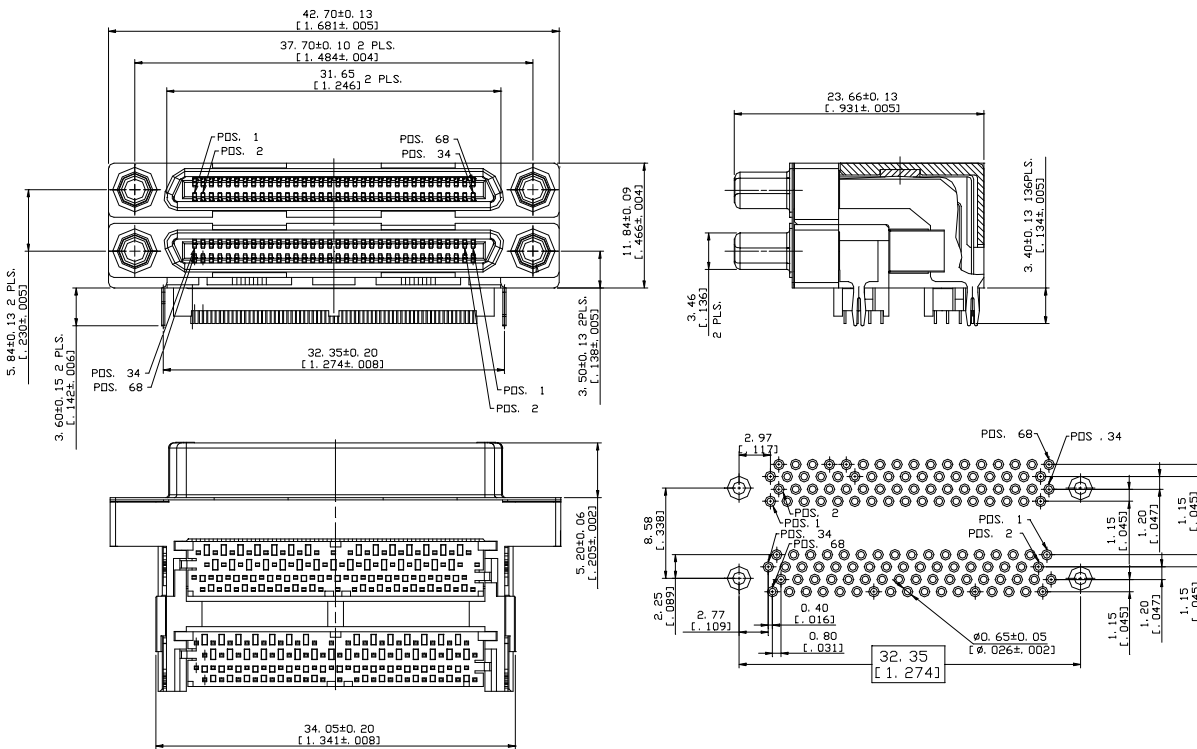

**ORDERING INFORMATION**

PRODUCT NO. : QAU 1 1 34 C-CD5- A F

SERIES PREFIX QAU  
 ULTRA SCSI 1  
 TERMINATION TYPE 1=RIGHT ANGLE  
 CONTACT DESIGN TYPE 1=FEMALE  
 NUMBER OF CONTACT 34=68 PDS.

LEAD FREE CODE F=LEAD FREE  
 PACKAGE CODE A=TUBE  
 EXTENSION CODE  
 CONTACT AREA PLATING C=GOLD FLASH OVER 30u'' PD/N1

QAU1134C-CD5-AF	30u'' PD/N1 GOLD FLASH OVER AT CONTACT AREA
P/N	PLATING