


NOTES:

1. MAX ALLOWABLE BOW: .005 INCH/INCH.
2. HEIGHT VARIATION BETWEEN ANY TWO PINS SHALL BE .010 MAX.
3. TERMINAL PUSHOUT FORCE: 2 lbs. MIN.
4. MAX PIN ROTATION IN BODY: 2°.
5. (C) REPRESENTS A CRITICAL DIMENSION.
6. FOR -S & -G PLATING, GOLD WILL BE ON CONTACT AREA.
7. TUBE POSITIONS -07 THRU -50. POSITIONS -01 THRU -06 ARE TO BE LAYER PACKAGED.
8. MAX CUT FLASH: .010
9. FOR -D, USE DWM-50-D WHEN RAN ON BOARD STACKER AUTOMATION, HTMS-50-D FOR ALL OTHER PROCESSES. FOR -S, USE HTMS-50-S.

DIMENSIONS ARE IN INCHES		UNLESS OTHERWISE NOTED		TOLERANCES ARE:		TITLE:	DWG NO:
ONE PLACE DECIMALS ± .1	TWO PLACE DECIMALS ± .01	THREE PLACE DECIMALS ± .005	FOUR PLACE DECIMALS ± .0020	ANGLES	± 2°	BOARD SPACING MICRO STRIPS	DWM-XX-XX-XX-X-XXX-XXX
							SHEET 1 OF 1


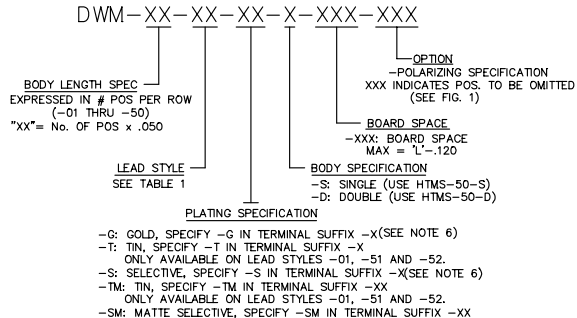


SEE NOTE 7

TABLE 1

LEAD STYLE	TERMINAL SPEC.	'L'	CONTACT AREA	'L' - .120 [3.05] BOARD SPACE MAX (REF)	PACKAGING (7 POS MIN).					
					SINGLE ROW			DOUBLE ROW		
-01	T-1M6-18-XX-2	.450 [11.43]	.190 [4.83]	REF .330 [8.38]	PT-1-24-01-72	(2) TP-24	PT-1-24-01-51	(2) TP-13		
-51	T-1M6-02-XX-2	.410 [10.41]	.140 [3.56]	REF .290 [7.37]	PT-1-24-01-24	(2) TP-24	PT-1-24-01-51	(2) TP-13		
-52	T-1M6-12-XX-2	.425 [10.80]	.165 [4.19]	REF .305 [7.75]	PT-1-24-01-72	(2) TP-24	PT-1-24-02-53	(2) TP-09		
-53	T-1M6-04-XX-2	.505 [12.83]	.190 [4.83]	REF .385 [9.78]	PT-1-24-01-72	(2) TP-24	PT-1-24-02-46	(2) TP-03		
-54	T-1M6-14-XX-2	.555 [14.10]	.190 [4.83]	REF .435 [11.05]	PT-1-24-01-46	(2) TP-24	PT-1-24-06-29	(2) TP-03		
-55	T-1M6-03-XX-2	.610 [15.49]	.190 [4.83]	REF .490 [12.45]	PT-1-24-01-48	(2) TP-24	PT-1-24-01-15	(2) TP-13		
-56	T-1M6-13-XX-2	.625 [15.88]	.190 [4.83]	REF .505 [12.83]	PT-1-24-07-29	(2) TP-03	PT-1-24-02-25	(2) TP-03		
-57	T-1M6-19-XX-2	.650 [16.51]	.190 [4.83]	REF .530 [13.46]	PT-1-24-13-29	(2) TP-03	PT-1-24-02-25	(2) TP-03		
-58	T-1M6-05-XX-2	.705 [17.91]	.190 [4.83]	REF .585 [14.86]	PT-1-24-01-48	(2) TP-24	PT-1-24-01-15	(2) TP-13		
-59	T-1M6-15-XX-2	.755 [19.18]	.190 [4.83]	REF .635 [16.13]	PT-1-24-01-47	(2) TP-24	PT-1-24-16-29	(2) TP-07		
-60	T-1M6-16-XX-2	.825 [20.96]	.190 [4.83]	REF .705 [17.91]	PT-1-24-10-03	(2) TP-24	PT-1-24-01-71	(2) TP-03		
-61	T-1M6-28-XX-2	1.050 [26.67]	.190 [4.83]	REF .930 [23.62]	PT-1-24-02-04	(2) TP-33	PT-1-24-08-03	(2) TP-07		

AG

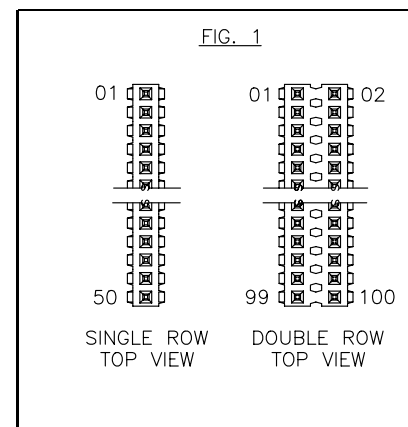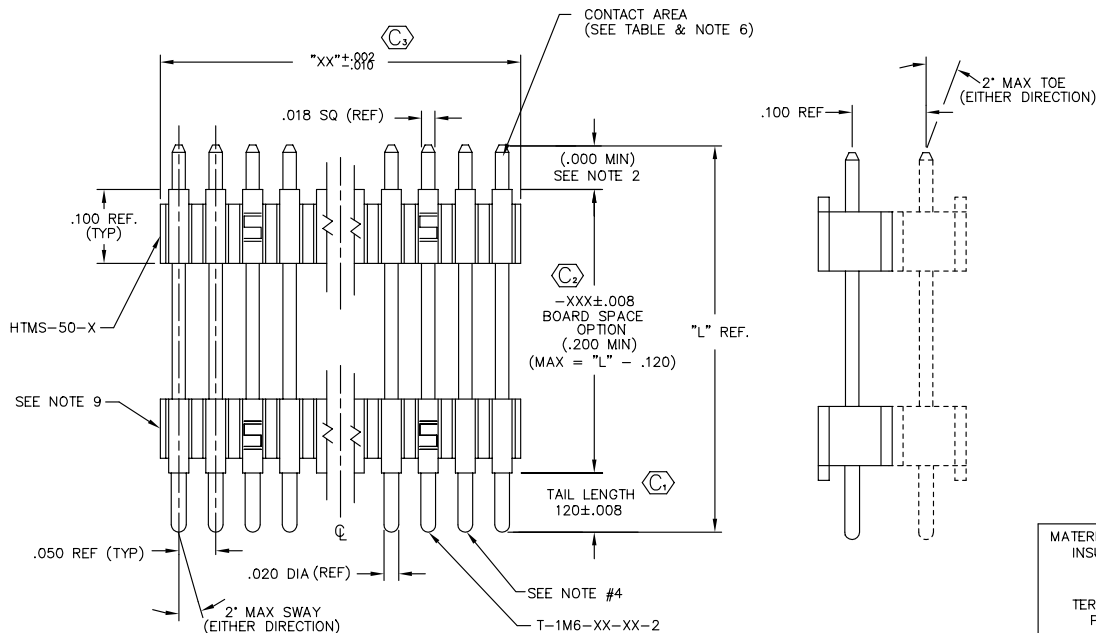

**PROPRIETARY NOTE**  
THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC INC AND SHALL NOT BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN CONSENT OF SAMTEC INC.

MATERIAL:  
INSULATOR:  
BLACK LIQUID CRYSTAL POLYMER OR NYLON 4/6  
TERMINAL:  
PHOSPHOR BRONZE

520 PARK EAST BLVD. NEW ALBANY, INDIANA 47150  
PHONE (812) 944-6733 P.O. BOX 1147  
CODE 55322

**samtec**

MADE BY: GREG REIDINGER 5-9-91  
CHECKED BY: MCCARTIN

APPROVAL: DEM

DWM-XX-XX-XX-X-XXX-XXX  
SHEET 1 OF 1