
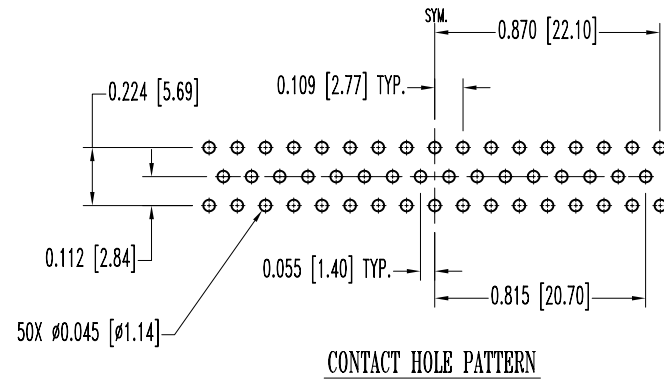
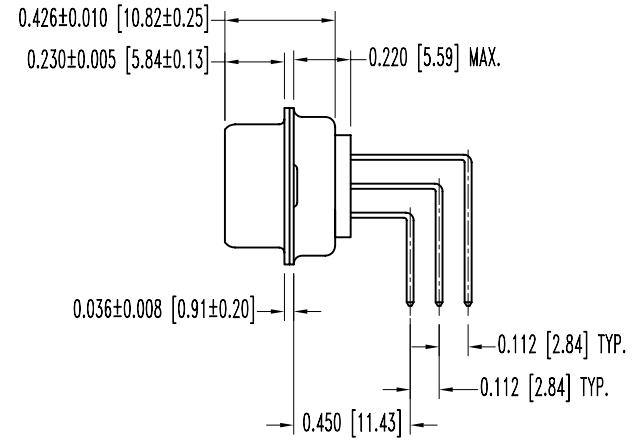
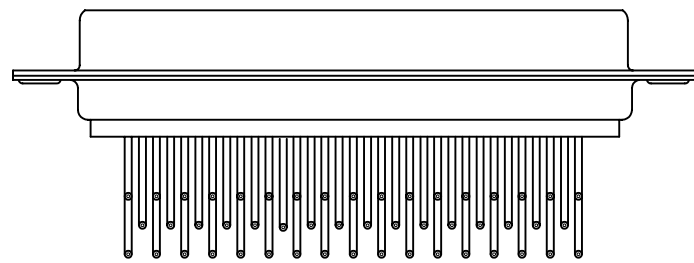



POSITRONIC INDUSTRIES BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC INDUSTRIES ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

| DATE | REV | REVISION RECORD | APP | DR | CK |
|----------|-----|-----------------|-----|----|----|
| 10-24-06 | NC | ECO 26912 | | YK | |
| | | | | | |
| | | | | | |

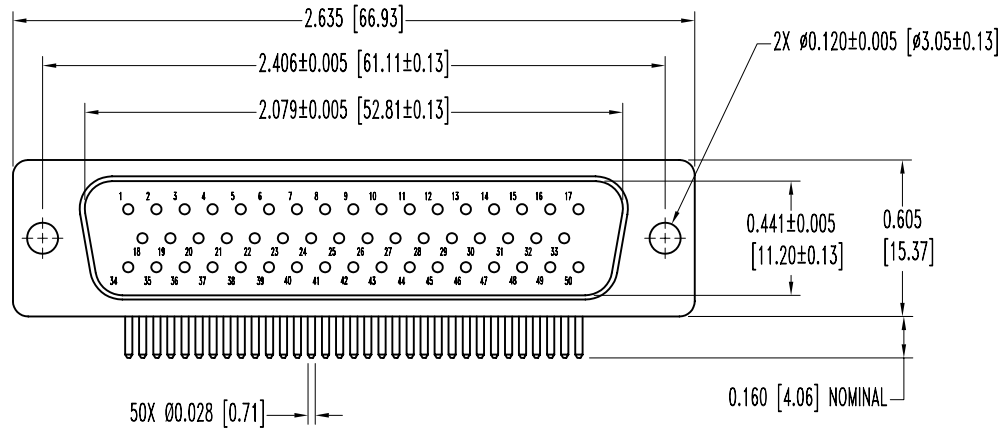

NOTES:

- MATERIALS AND FINISHES:
 INSULATOR: NYLON RESIN, UL 94V-0, BLACK COLOR.
 CONTACTS: PRECISIONED MACHINED BRASS, GOLD FLASH OVER NICKEL FINISH.
 SHELLS: STEEL, TIN PLATE.
- ELECTRICAL CHARACTERISTICS:
 CONTACT CURRENT RATING: 7.5 AMPS NOMINAL.
 INITIAL CONTACT RESISTANCE: 0.008 OHMS MAX.
 INSULATOR RESISTANCE: 5 G OHMS.
 WORKING VOLTAGE: 300 V. r.m.s.
- TEMPERATURE RANGE: -55°C TO +125°C.
- DIMENSIONS ARE IN INCHES [MILLIMETERS].

| | | | |
|--|--|---|--|
|  POSITRONIC INDUSTRIES INC. www.connectpositronic.com | | SCALE: N.T.S. DRAWN BY: YK APPROVED BY: | |
| DECIMAL TOL. ± 0.015 [0.38] | | TITLE: MD SERIES | |
| MD50M4000X | | | |
| DATE: 10-24-06 | | DRAWING NUMBER: SK8083 | |
| ANGULAR TOL. ± 5° | | REV. NC | |