


- High temperature insulator with standoffs is compatible with standard automatic insertion equipment.
- Soft copper alloy machined pins allows clinching.
- Chamfered contact entry allows for ease of IC insertion without bent leads.
- Uses M-M#1005 pin with #30 clip rated at 3 amps. See page 135 for pin details.

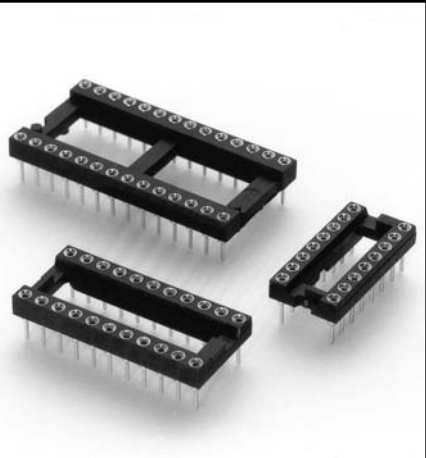

| | | | | | |
|-----------------------------|----------|----------|----------|--------------------------|-----------------------------|
| Total number of pins | | | | Quantity per tube | Ordering Information |
| | A | B | C | | |

| | | | | | |
|----|-----|-----|-----|----|-------------------|
| 6 | 0.3 | 0.3 | 0.4 | 67 | 110-93-306-41-605 |
| 8 | 0.4 | 0.3 | 0.4 | 50 | 110-93-308-41-605 |
| 14 | 0.7 | 0.3 | 0.4 | 28 | 110-93-314-41-605 |
| 16 | 0.8 | 0.3 | 0.4 | 25 | 110-93-316-41-605 |
| 18 | 0.9 | 0.3 | 0.4 | 22 | 110-93-318-41-605 |
| 20 | 1.0 | 0.3 | 0.4 | 20 | 110-93-320-41-605 |
| 24 | 1.2 | 0.3 | 0.4 | 16 | 110-93-324-41-605 |
| 22 | 1.1 | 0.4 | 0.5 | 18 | 110-93-422-41-605 |
| 24 | 1.2 | 0.6 | 0.7 | 16 | 110-93-624-41-605 |
| 28 | 1.4 | 0.6 | 0.7 | 14 | 110-93-628-41-605 |
| 32 | 1.6 | 0.6 | 0.7 | 12 | 110-93-632-41-605 |
| 40 | 2.0 | 0.6 | 0.7 | 10 | 110-93-640-41-605 |

| | | | | |
|----------------|--|--|-------------|--|
| PLATING CODE = | | | 93 | |
| Sleeve (Pin) | | | 200μ" Sn/Pb | |
| Contact (Clip) | | | 30μ" Au | |