

SPECIFICATIONS

Modular Jack

Mechanical

Mating Force: 5Pounds max.
Unmating Force: 10Pounds max.
Durability: 1000 Cycles

JM Series


RJ45 1X1
R/A, T/H Type
1.02mm [.040"] Pitch

Electrical


Current Rating: 1.5A max.
Contact Resistance: 50mW max.
Dielectric Withstanding Voltage: 1000V

Physical

Housing: Thermoplastic, UL 94V-0 rated in Black Color
Contact: Copper Alloy
Plating: See "ORDERING INFORMATION"
Shell: Copper Alloy
Operating Temperature: -30 to +85

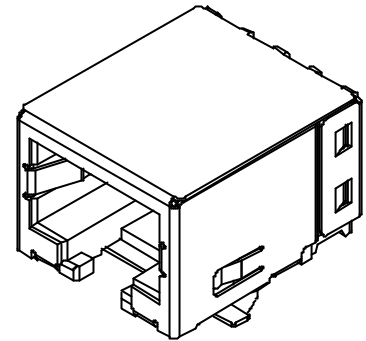

DRAWING

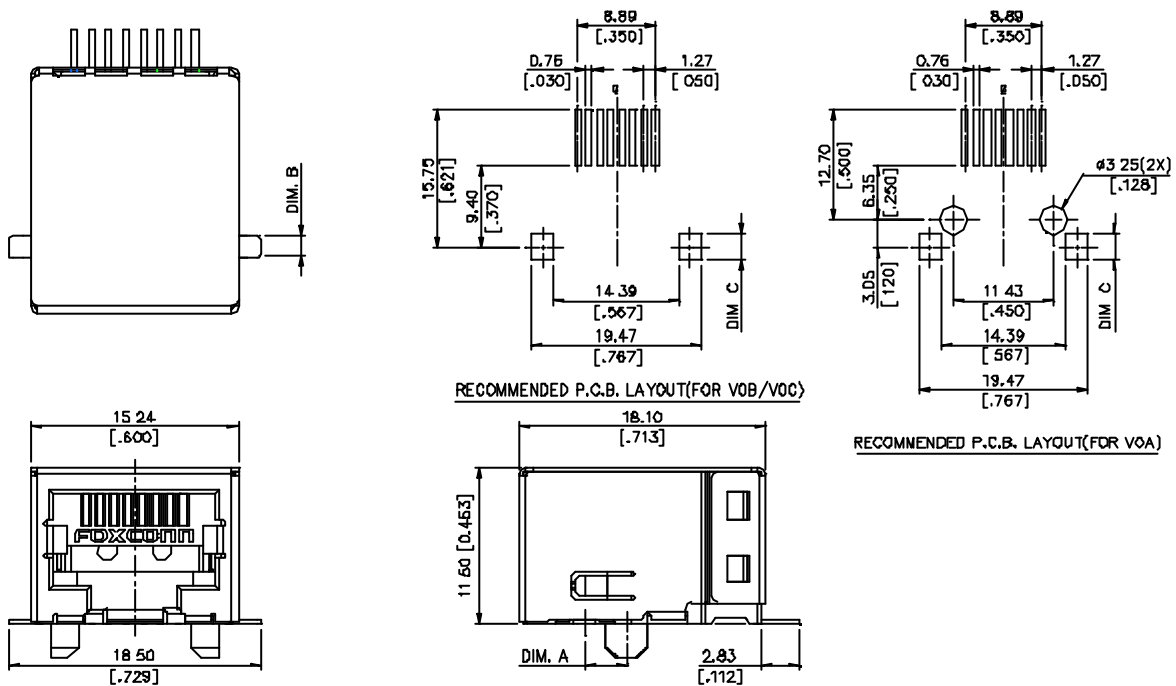

ORDERING INFORMATION

PRODUCT NO. : JM 7 4 1 1 * - V0 *

Series Prefix
 JM=Modular Jack

Body & Termination
 7=R/A All Shield SMT

Design Type
 4=W/O PENEL-GND Shell, W/O B/L

POS. Type
 1=8P8C

Extension Code

Body Height: 11.50mm

Contact Area Plating
 1=Flash Gold
 3=30u" Gold
 5=50u" Gold
 7=15u" Gold

No. of Body
 1=1Port

JM7411*-V0C	None	1.6D	2.54	W/O PLASTIC POST
JM7411*-V0B	None	3.75	4.69	W/O PLASTIC POST
JM7411*-V0A	3.D5	1.6D	2.54	W/ PLASTIC POST
P/N	DIM A	DIM B	DIM. C	DESCRIPTION