


# 667 Series: | Ø 8.1 mm Mounting (Low Profile)

## NEW PRODUCT

- Post anodising allows earthing to panel
- Anti-rotational flat
- Wide viewing angle
- MLQ 10

Note: Surface 'A' Anodising removed for earthing to panel

SCALE 1:1  
DIMENSIONS IN MM (TYPICAL)

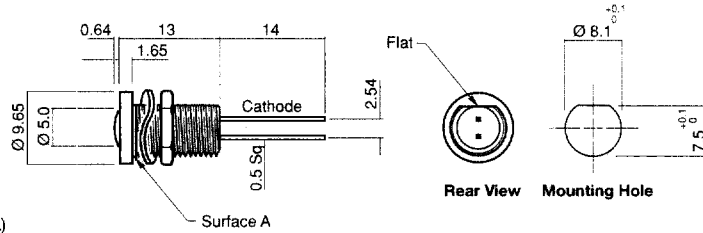

## Ordering information and technical characteristics (Ta = 25°C)


Order code	Colour	Lens	Voltage DC Vopr	Current DC Iopr	Luminous Intensity Iv @ Iopr	Wave Length λp	Viewing Angle (Inclusive)	Operating Temp Topr	Storage Temp Tstg
667 - 926 - 04	Red	Diffused	2.1	20	13	650	180 deg	-40	-50
667 - 927 - 04	Yellow		2.2	20	13	585		to	to
667 - 928 - 04	Green		2.2	20	20	563		+85	+100
			V	mA	mcd	nm		°C	°C

# 665/669 Series: | Ø 8.1 mm Mounting Domed Lens (Hexagonal Bezel)

## NEW PRODUCT

- Unique hexagonal bezel aids mounting
- Sealing specification to IP68 (0.34 bar)
- Low current options
- MLQ 10
- Hard anodized to marine specification
- MTBF 90,000hrs  
200,000 low current

SCALE 1:1  
DIMENSIONS IN MM (TYPICAL)

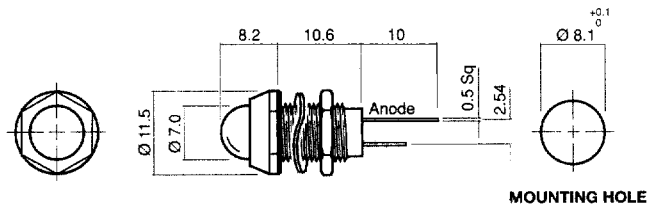

## Ordering information and technical characteristics (Ta = 25°C)

Order code	Colour	Lens	Voltage DC Vopr	Current DC Iopr	Luminous Intensity Iv @ Iopr	Wave Length λp	Viewing Angle (Inclusive)	Operating Temp Topr	Storage Temp Tstg
665 - 503 - 01	Red	Coloured	1.8	2	3.0	650	180 deg	-40	-50
665 - 509 - 01	Yellow		1.9	2	3.0	585			
665 - 512 - 01	Green		1.9	2	4.0	563			
665 - 503 - 04	Red	Diffused	2.1	20	68	650	180 deg	-40	-50
665 - 509 - 04	Yellow		2.2	20	68	585			
665 - 512 - 04	Green		2.2	20	100	563			
669 - 503 - 01	Red	Smoked	1.8	2	3.0	650	180 deg	+85	+100
669 - 509 - 01	Yellow		1.9	2	3.0	585			
669 - 512 - 01	Green		1.9	2	4.0	563			
669 - 503 - 04	Red	Smoked	2.1	20	68	650	180 deg	+85	+100
669 - 509 - 04	Yellow		2.2	20	68	585			
669 - 512 - 04	Green		2.2	20	100	563			
			V	mA	mcd	nm	deg	°C	°C