

Product Specifications



L4R-PNMDM-2M-3GSH

LDF4RK-50A SureFlex™ Jumper with interface types N Male and 7-16 DIN Male, 2 m

OBSOLETE

This product was discontinued on: **3/1/2011**



CHARACTERISTICS


General Specifications

Body Style, Connector A	Straight
Body Style, Connector B	Straight
Cable Family	LDF4-50A
Interface, Connector A	N Male
Interface, Connector B	7-16 DIN Male
Length	2.000 m 6.562 ft

Electrical Specifications

3rd Order IMD	-116.00 dBm
DTF, Connector A	-34.00 dB
DTF, Connector B	-34.00 dB

Jumper Assembly Sample Label

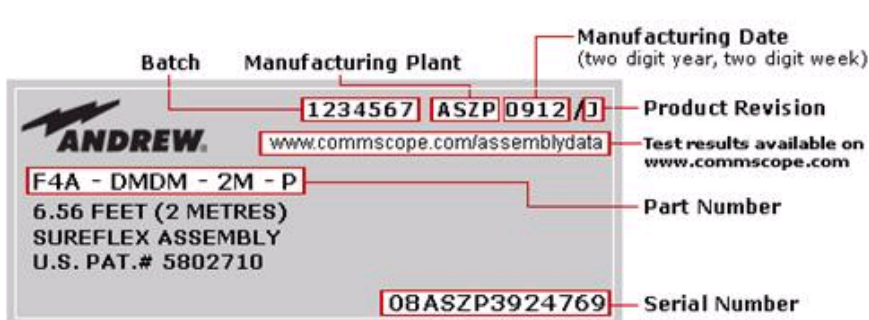

www.commscope.com/andrew

Product Specifications

L4R-PNMDM-2M-3GSH



Return Loss/VSWR

Frequency Band	VSWR	Return Loss (dB)
698–960 MHz	1.06	30.00
1700–2200 MHz	1.06	30.00

Regulatory Compliance/Certifications

Agency	Classification
RoHS 2002/95/EC	Compliant by Exemption
China RoHS SJ/T 11364-2006	Above Maximum Concentration Value (MCV)
ISO 9001:2008	Designed, manufactured and/or distributed under this quality management system



INCLUDED PRODUCTS

LDF4RK-50A

 LDF4-50, HELIAX® Low Density Foam Coaxial Cable, corrugated copper, 1/2 in, black non-halogenated, fire retardant polyolefin jacket

LDF4RK-50A-NAV

 LDF4-50, HELIAX® Low Density Foam Coaxial Cable, corrugated copper, 1/2 in, black non-halogenated, fire retardant polyolefin jacket with jacket printed NAVSEA 8485339

www.commscope.com/andrew

©2011 CommScope, Inc. All rights reserved.

All trademarks identified by ® or ™ are registered trademarks or trademarks, respectively, of CommScope. All specifications are subject to change. See www.commscope.com/andrew for the most current information.

page 2 of 2
6/9/2011