

B15 FEMALE HEADER

PROFILE: 4.5mm

PITCH: 1.27mm

MATERIAL

INSULATOR - NYLON 6T (UL 94V-0)
CONTACT - COPPER ALLOY

SPECIFICATIONS

CURRENT RATING

1 AMP DC

CONTACT RESISTANCE

15 MILLIOHM MAX.

INSULATION RESISTANCE


500 MEGOHM MIN.

DIELECTRIC VOLTAGE






500V AC FOR ONE MINUTE

OPERATING TEMPERATURE

-40°C TO 105°C

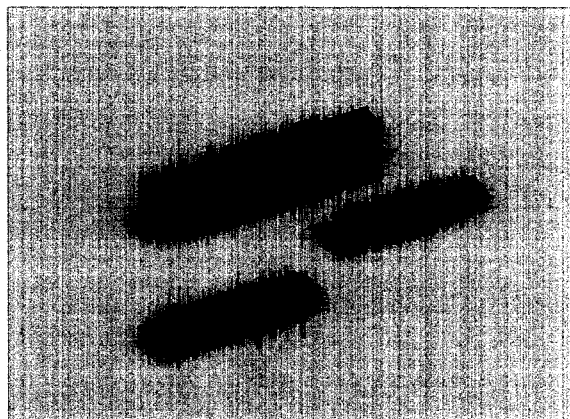

B

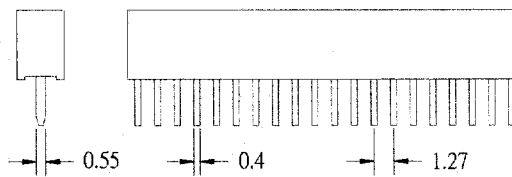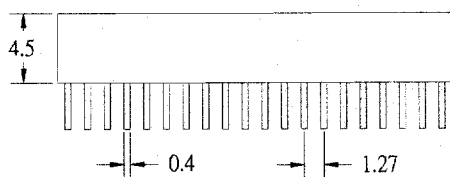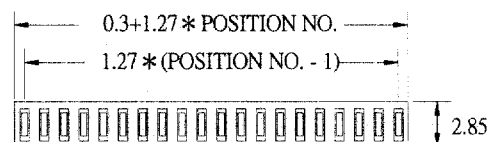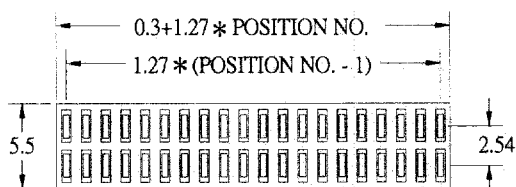

1.NO. OF CONTACT	2.CONTACT MATERIAL	3.CONTACT PLATING	4.INSULATOR COLOR
SINGLE ROW 1*2 - 1*60 DUAL ROW 2*2 - 2*60	B: PHOSPHOR BRONZE	T: TIN PLATED S: SELECTIVE G: GOLD FLASH A: 5u" INCH GOLD B: 10u" INCH GOLD C: 15u" INCH GOLD D: 30u" INCH GOLD	1. BLACK

