

RF IMPEDANCE TRANSFORMER

SURFACE MOUNT MODEL: TM1-3

WIDE BANDWIDTH

100 - 6000 MHz

FEATURES:


- ▶ Cost Effective
- ▶ Low Loss
- ▶ Small Size, Surface Mount
- ▶ Lead Free Patented REL-PRO® Technology




Part Identifier:
2 Green Dots

SPECIFICATIONS

Frequency	100 - 6000 MHz								
Impedance Ratio	1:1								
Insertion Loss (dB) *	<table border="1"> <tr> <th>Frequency (MHz)</th> <th>dB (Max.)</th> </tr> <tr> <td>100 - 1000</td> <td>3.2</td> </tr> <tr> <td>1001 - 3000</td> <td>3.2</td> </tr> <tr> <td>3001 - 6000</td> <td>3.8</td> </tr> </table>	Frequency (MHz)	dB (Max.)	100 - 1000	3.2	1001 - 3000	3.2	3001 - 6000	3.8
	Frequency (MHz)	dB (Max.)							
	100 - 1000	3.2							
	1001 - 3000	3.2							
3001 - 6000	3.8								
Amplitude Unbalance	2.0 dB (Typ.)								
Phase Unbalance	18° (Typ.)								
Return Loss	10 dB (Typ.)								
Input Power	0.25 Watt (Max.)								
Input Impedance	50 Ohms (Nom.)								
Operating Temperature Range	-40 to +85 °C								
<p>* Plot excludes 3 dB Split Loss ** With DC blocking capacitors installed</p>									

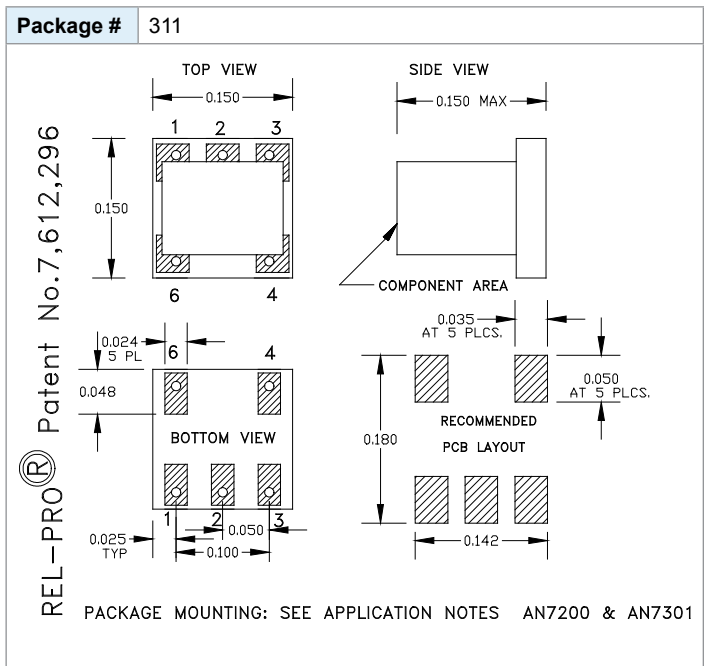

PORT CONFIGURATION			
Pri. Dot	Pri.	Sec. Dot	Sec.
6	4	1	3

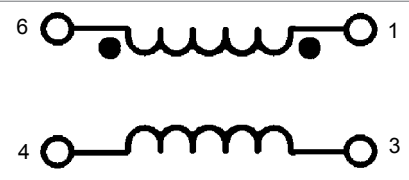



RF IMPEDANCE TRANSFORMER

SURFACE MOUNT MODEL: TM1-3

WIDE BANDWIDTH

100 - 6000 MHz

Data @ 25°C

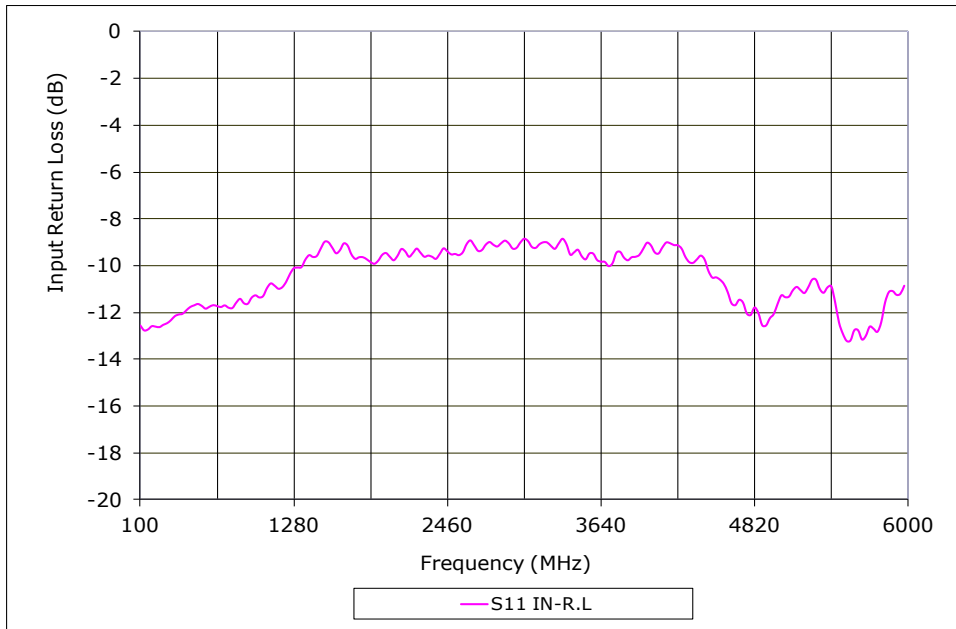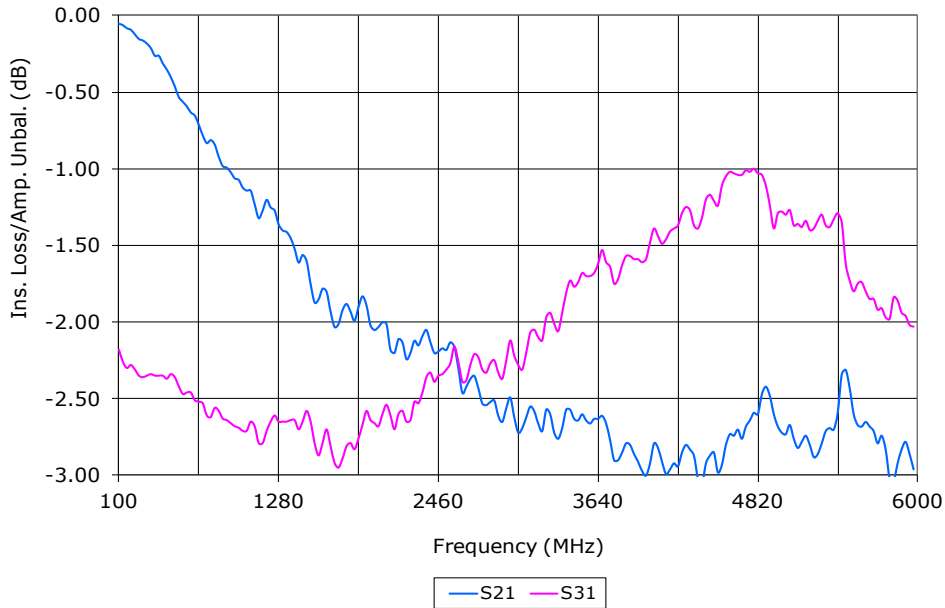

PERFORMANCE PLOTS


RF IMPEDANCE TRANSFORMER

SURFACE MOUNT MODEL: TM1-3

WIDE BANDWIDTH

100 - 6000 MHz

Data @ 25°C

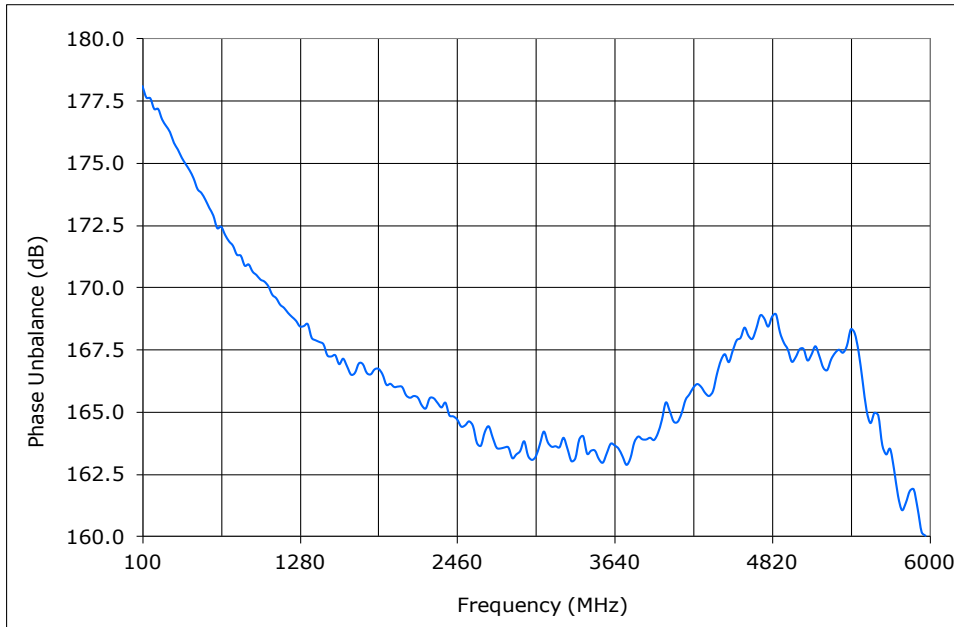

PERFORMANCE PLOTS