



REV	DATE	ECD#
A	09/06/90	1140
B	12/14/92	1232

DRAWING NOT TO SCALE  
ALL DIMENSIONS IN INCHES

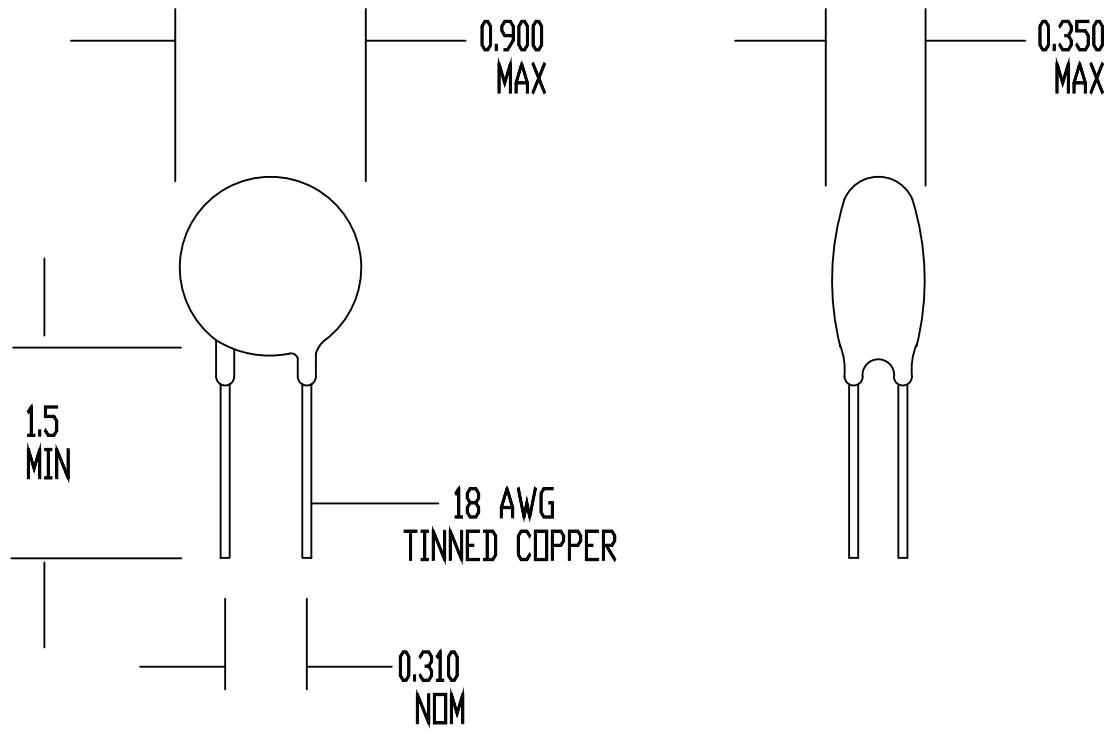

SPECIFICATIONS:  
 RESISTANCE AT 25 DEG C = 4 OHMS +/- 20%  
 MAXIMUM CONTINUOUS CURRENT (I<sub>max</sub>) = 14 AMPS  
 RESISTANCE AT I<sub>max</sub> = 0.05 OHMS NOMINAL  
 MAXIMUM VOLTAGE RATING = 265 VAC (RMS)  
 MAXIMUM SURGE RATING = 100 JOULES  
 ENCAPSULATION = SILICONE RESIN  
 MARKING = OPTIONAL

DRAWN BY D. NGUYEN		 <b>AMETHERM</b> <i>Circuit Protection Thermistors</i>
DATE 10/26/87	ORIG. F. TISED	
REV B	APP	SURGE-GARD INRUSH CURRENT LIMITER
SHEET 1 OF 1		SG32